


Euro Terminal Blocks 2M Series

FEATURES:

- Maintains center to center spacing when installed end to end
- High density: connections on 5.1mm centers (0.2")
- Subminiature: only 12.7mm (0.5") high
- 2 Thru 24 terminal positions
- Dead front design protects against shock
- Standoffs for flux cleaning
- Captive 3-48 UNC screws
- Spring-loaded wire protector
- Extra large entry for stranded wire, multiple wires or up to #12 AWG single wire
- Optional terminal identification available on front surface

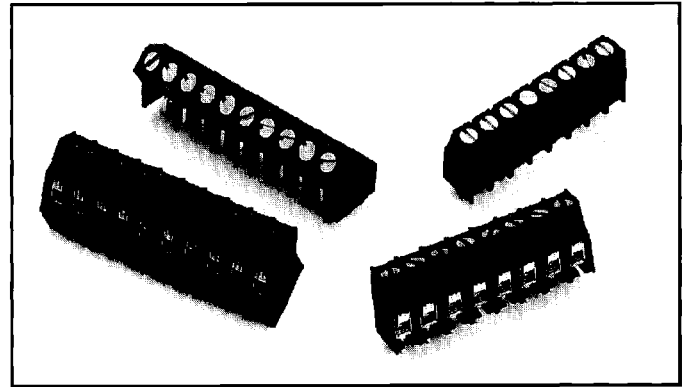


MATERIAL SPECIFICATIONS:

Barrier Material: ... Thermoplastic polyester, UL recognized flammability classification **94V-0**, black, 120°C max. operating temperature

Terminals: Bright acid-tin over copper plated brass

Screws: Zinc plated steel with clear chromate, 3-48 UNC

Rating: 20 Amps/300 volts (limited rating) 

Insulation

Resistance: >5 X 10¹⁰ Ohms

Wire Range: 12-22 AWG


Max. tightening torque 5 lb. in

Recommended PC hole size055" Dia.


UL File Number: .. E54800

CSA File Number: LR30811


Dimensions mm/in.

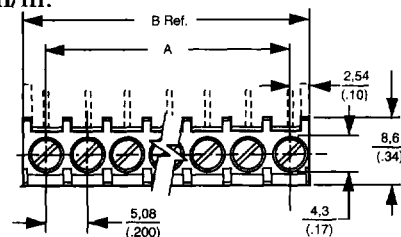


TOP VIEW

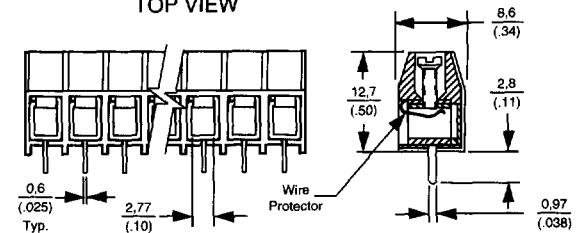

VERTICAL

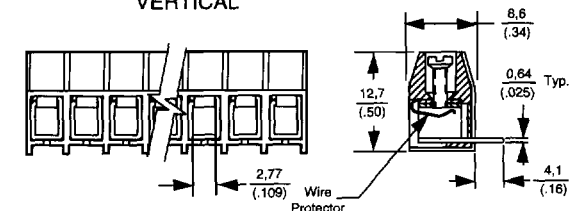

RIGHT ANGLE

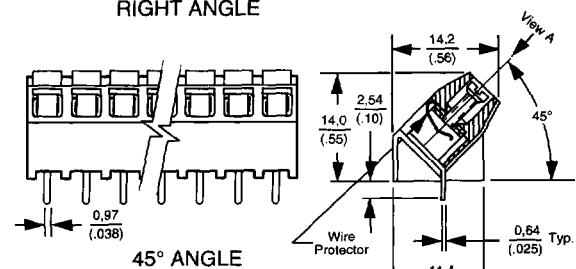

45° ANGLE

PART NUMBERS/STANDARD CONFIGURATIONS:

Part Number			No. of Positions	Dim "A"	Dim "B"
Vertical	Right Angle	45° Angle			
2MV-02	2MR-02	2MA-02	2	$\frac{5.1}{0.2}$	$\frac{10.2}{0.4}$
2MV-03	2MR-03	2MA-03	3	$\frac{10.2}{0.4}$	$\frac{15.2}{0.6}$
2MV-04	2MR-04	2MA-04	4	$\frac{15.2}{0.6}$	$\frac{20.3}{0.8}$
2MV-05	2MR-05	2MA-05	5	$\frac{20.3}{0.8}$	$\frac{25.4}{1.0}$
2MV-06	2MR-06	2MA-06	6	$\frac{25.4}{1.0}$	$\frac{30.5}{1.2}$
2MV-07	2MR-07	2MA-07	7	$\frac{30.5}{1.2}$	$\frac{35.6}{1.4}$
2MV-08	2MR-08	2MA-08	8	$\frac{35.6}{1.4}$	$\frac{40.6}{1.6}$
2MV-10	2MR-10	2MA-10	10	$\frac{45.7}{1.8}$	$\frac{50.8}{2.0}$
2MV-12	2MR-12	2MA-12	12	$\frac{55.9}{2.2}$	$\frac{61.0}{2.4}$

Need more technical information?

Consult your local Augat sales office listed on the back cover

AUGAT Inc.
452 John L. Dietsch Blvd.
Attleboro Falls, MA 02763
USA