





## P-Channel Enhancement Mode Power MOSFET

### ■ Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	-30	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$I_D$	Continuous Drain Current (Note 1)	$T_A=25^\circ\text{C}$	-5.3
		$T_A=70^\circ\text{C}$	-4.7
$I_{DM}$	Pulsed Drain Current (Note 2)	-20	A
$P_D$	Total Power Dissipation	$T_A=25^\circ\text{C}$	2.5
	Linear Derating Factor		0.02
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
$T_J$	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

### ■ Thermal Resistance Ratings

Symbol	Parameter	Maximum	Units
Rthj-amb	Thermal Resistance Junction-ambient (Note 1) Max.	50	$^\circ\text{C}/\text{W}$

### ■ Electrical Characteristics at $T_J=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}, I_D=-250\mu\text{A}$	-30	-	-	V
$\Delta BV_{DSS} / \Delta T_J$	Breakdown Voltage Temperature Coefficient	Reference to $25^\circ\text{C}$ , $I_D=-1\text{mA}$	-	-0.04	-	$\text{V}/^\circ\text{C}$
$R_{DS(ON)}$	Static Drain-Source On-Resistance (Note 3)	$V_{GS}=-10\text{V}, I_D=-5.3\text{A}$	-	-	50	m $\Omega$
		$V_{GS}=-4.5\text{V}, I_D=-4.2\text{A}$	-	-	90	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu\text{A}$	-1	-	-3	V
$g_{fs}$	Forward Transconductance	$V_{DS}=-10\text{V}, I_D=-5.3\text{A}$	-	10	-	S
$I_{DSS}$	Drain-Source Leakage Current ( $T_J=25^\circ\text{C}$ )	$V_{DS}=-30\text{V}, V_{GS}=0\text{V}$	-	-	-1	uA
	Drain-Source Leakage Current ( $T_J=70^\circ\text{C}$ )	$V_{DS}=-24\text{V}, V_{GS}=0\text{V}$	-	-	-25	
$I_{GSS}$	Gate-Source Leakage	$V_{GS}=\pm 20\text{V}$	-	-	$\pm 100$	nA
$Q_g$	Total Gate Charge (Note 3)	$I_D=-5.3\text{A}$ ,	-	9	15	nC
$Q_{gs}$	Gate-Source Charge	$V_{DS}=-24\text{V}$ ,	-	3	-	
$Q_{gd}$	Gate-Drain ("Miller") Charge	$V_{GS}=-4.5\text{V}$	-	5	-	
$t_{d(on)}$	Turn-On Delay Time (Note 3)	$V_{DS}=-15\text{V}$ ,	-	11	-	ns
$t_r$	Rise Time	$I_D=-1\text{A}$ ,	-	8	-	
$t_{d(off)}$	Turn-Off Delay Time	$R_G=6\Omega, V_{GS}=-10\text{V}$	-	25	-	
$t_f$	Fall-Time	$R_D=15\Omega$	-	17	-	
$C_{iss}$	Input Capacitance	$V_{GS}=0\text{V}$ ,	-	507	810	pF
$C_{oss}$	Output Capacitance	$V_{DS}=-15\text{V}$ ,	-	222	-	
$C_{rss}$	Reverse Transfer Capacitance	$f=1.0\text{MHz}$	-	158	-	

### ■ Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{SD}$	Forward On Voltage (Note 3)	$I_S=-2.6\text{A}, V_{GS}=0\text{V}$	-	-	-1.2	V
$t_{rr}$	Reverse Recovery Time (Note 3)	$I_S=-5.3\text{A}, V_{GS}=0\text{V}$ ,	-	29	-	ns
$Q_{rr}$	Reverse Recovery Charge	$di/dt=100\text{A}/\mu\text{s}$	-	20	-	nC

**Note 1:** Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board; 125 $^\circ\text{C}/\text{W}$  when mounted on Min. copper pad.

**Note 2:** Pulse width limited by Max. junction temperature.

**Note 3:** Pulse width  $\leq 300\mu\text{s}$ , duty cycle  $\leq 2\%$ .

## P-Channel Enhancement Mode Power MOSFET

### ■ Typical Performance Characteristics

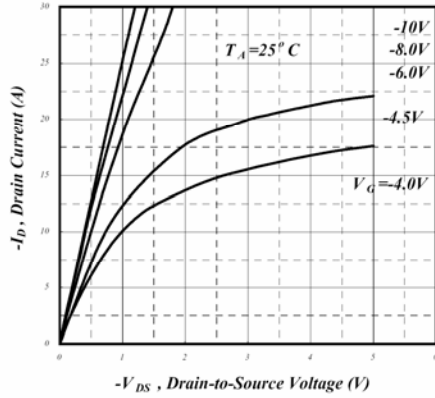


Fig 1. Typical Output Characteristics

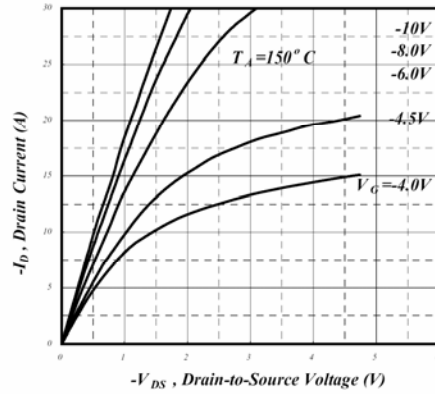


Fig 2. Typical Output Characteristics

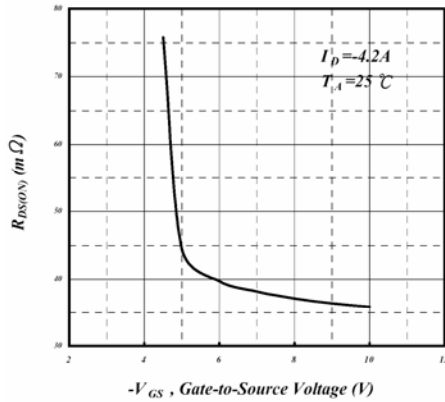


Fig 3. On-Resistance v.s. Gate Voltage

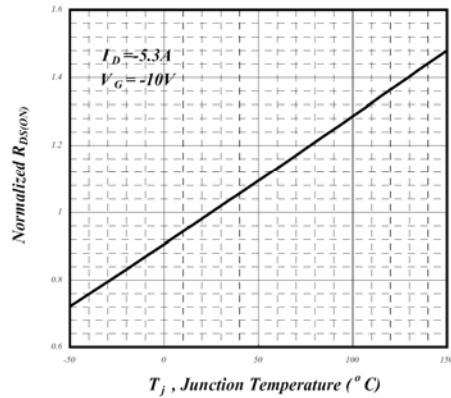


Fig 4. Normalized On-Resistance v.s. Junction Temperature

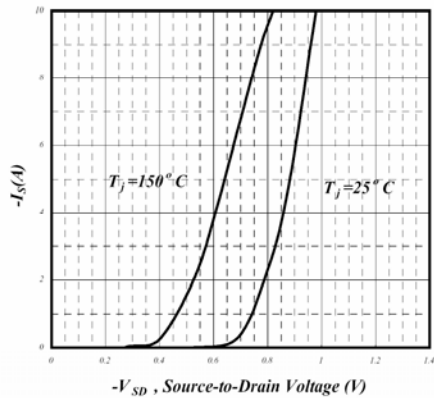


Fig 5. Forward Characteristic of Reverse Diode

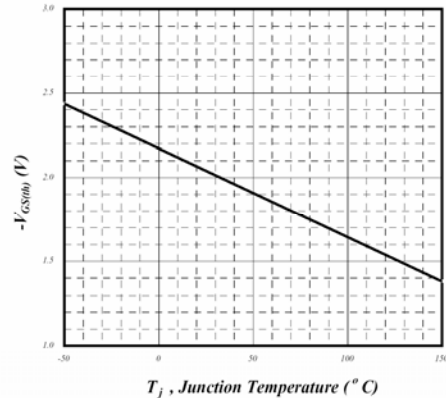


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

## P-Channel Enhancement Mode Power MOSFET

### ■ Typical Performance Characteristics (Continued)

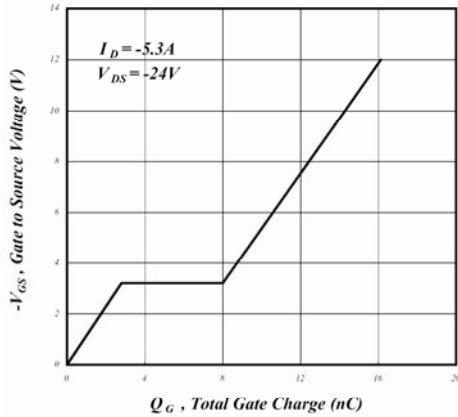


Fig 7. Gate Charge Characteristics

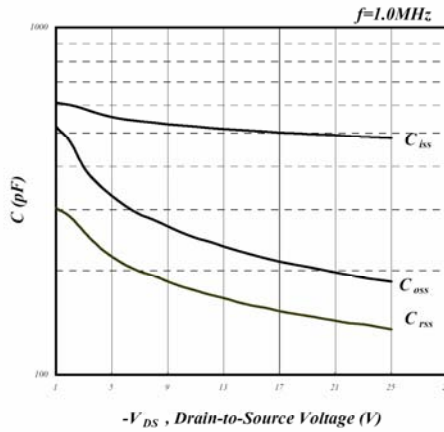


Fig 8. Typical Capacitance Characteristics

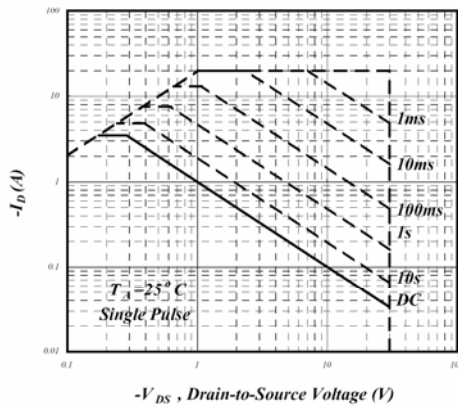


Fig 9. Maximum Safe Operating Area

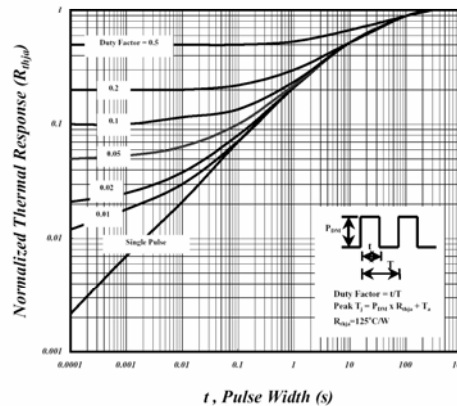


Fig 10. Effective Transient Thermal Impedance

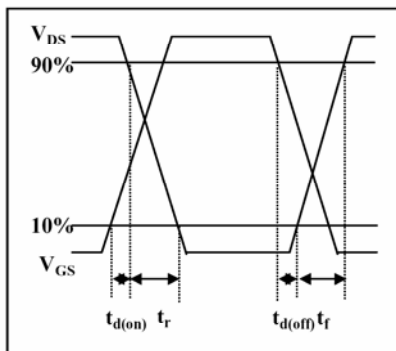


Fig 11. Switching Time Waveform


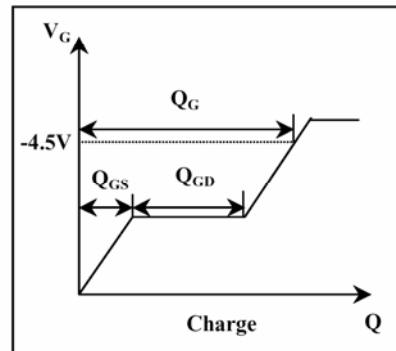


Fig 12. Gate Charge Waveform

## P-Channel Enhancement Mode Power MOSFET


### ■ Marking Information

SO-8

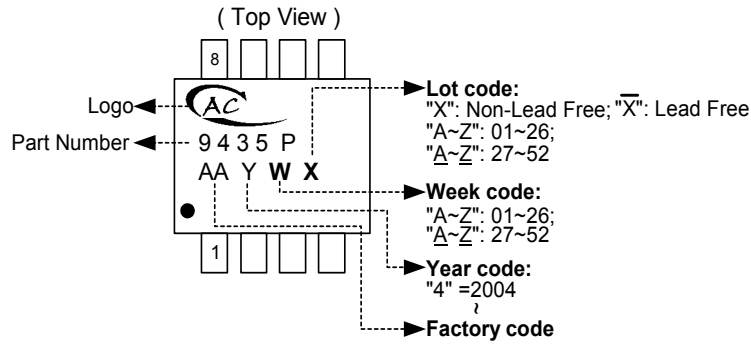

### ■ Package Information

Package Type: SO-8

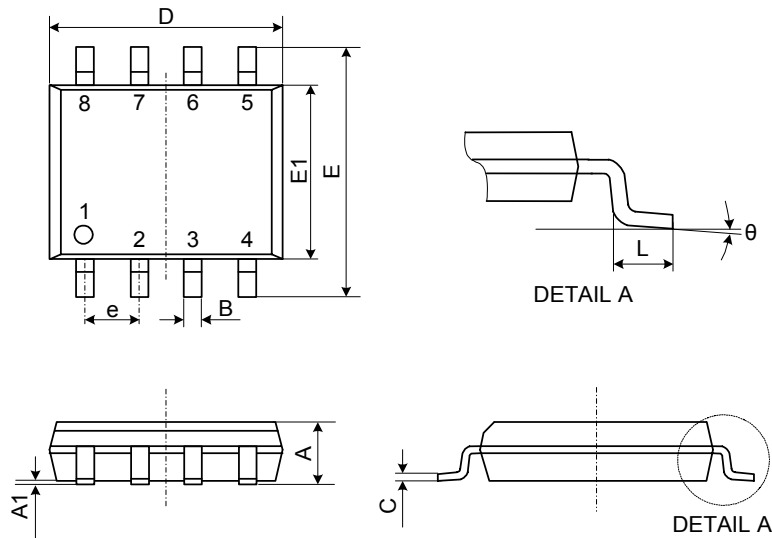

1. All Dimensions Are in Millimeters.
2. Dimension Does Not Include Mold Protrusions.

Symbol	Dimensions In Millimeters		
	Min.	Nom.	Max.
A	1.35	1.55	1.75
A1	0.10	0.18	0.25
B	0.33	0.41	0.51
C	0.19	0.22	0.25
D	4.80	4.90	5.00
E	5.80	6.15	6.50
E1	3.80	3.90	4.00
L	0.38	0.71	1.27
$\theta$	0°	4°	8°
e	1.27 TYP.		