



A/D ELECTRONICS, INC.




AMDC-089



AMDC-099



APM-001

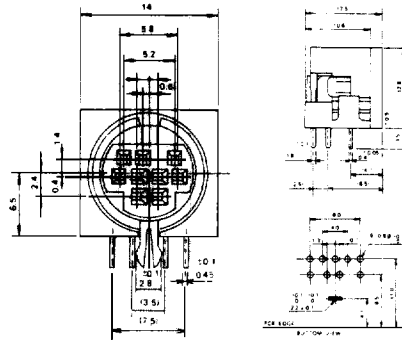


9P MINI DIN SOCKET

Contact Resistance: 30mΩ MAX.
Insulation Resistance: 50MΩ MIN.

at D.C. 250V

Voltage Withstand: AC 250V 1 minute
Rating: AC 100V 1A MAX.
DC 12V 2A MAX.

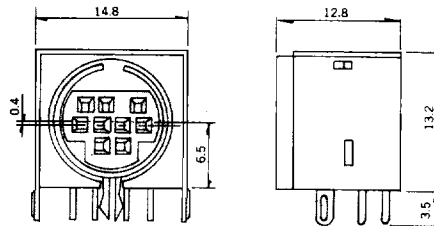


9P MINI DIN SOCKET WITH SHIELD:

Contact Resistance: 30mΩ MAX.
Insulation Resistance: 50MΩ MIN.

at D.C. 250V

Voltage Withstand: AC 250V 1 minute
Rating: AC 100V 1A MAX.
DC 12V 2A MAX.

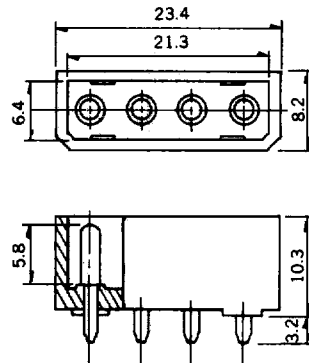

4P HEADER

(VERTICAL MOUNT TYPE):

Rating: 5A 250V AC
Insulation Resistance: 100MΩ MIN.
at 500V D.C.

Contact Resistance: 30mΩ MAX.
Withstanding Voltage: 2000 V A.C.
for one minute.

-A = 2.0mm Center Pin
-B = 2.5mm Center Pin