



Features

- ◇ For IF SAW filter
- ◇ Single-ended operation
- ◇ Ceramic Surface Mount Package
- ◇ Small size
- ◇ RoHS compliant (2002/95/EC), Pb-free

Specifications


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	73.5	73.7	73.9
Insertion Loss	dB	-	13.4	14
1 dB Bandwidth	MHz	0.9	0.95	-
3 dB Bandwidth	MHz	1.15	1.19	-
35 dB Bandwidth	MHz	-	2.15	3
40 dB Bandwidth	MHz	-	2.22	3.1
Passband Variation	dB	-	0.7	-
Absolute Delay	usec	-	1.7	-
Ultimate Rejection	dB	40	44	-
Material Temperature coefficient	KHz/°C	0.07		
Substrate Material	-	Qz		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-25	-	+85
Storage Temperature Range	°C	-45	-	+85
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1C		
Package Size	SMD13.3*6.5			

Notes:

1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.

	SIPAT Co., Ltd. (CETC No.26 Research Institute) #14 Nanping Huayuan Road, Chongqing, China, 400060	Part Number	LBS07406	
		Rev. Date	2011-05-13	
		Ver.	2.0	Page 1/3


Matching Configuration

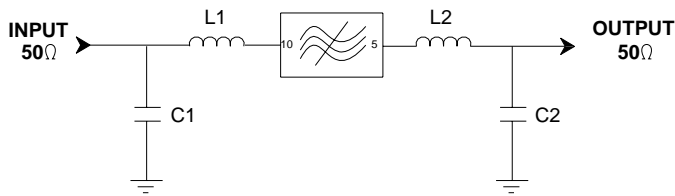

$L1 = (330 + 18)nH$ $L2 = (330 + 39)nH$
 $C1 = 82pF$ $C2 = 100pF$
Source/Load Impedance=50 ohm

Notes - Component values may change depending on test tongs.

Package Dimension

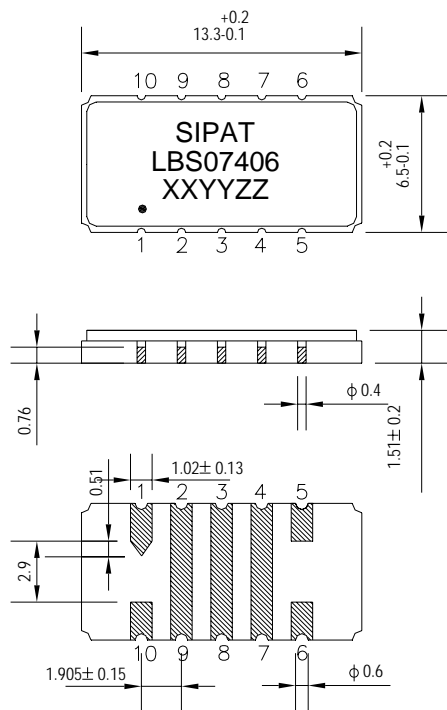

Pad Configuration:

Input: 10
Output: 5
Ground: 1,2,3,4,6,7,8,9

Marking Configuration:

- 1) •: Pad Number 1 Index
- 2) SIPAT: Manufacturer Name
- 3) LBS07406: Part Number
- 4) XXYY: Date(Year/month)
- 5) ZZ: Identified Code

Package: SMD13.3*6.5

Unit: mm



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBS07406	
Rev. Date	2011-05-13	
Ver.	2.0	Page 2/3



Typical Performance

