


CONTACT PART NUMBER (XXXX)	CLIP/SHELL PLATING	"T" TAIL LENGTH	INSERTION FORCE	EXTRACTION FORCE	NO. OF FINGERS	REF. CLIP NO.
509B	30 u" GOLD/200 u" TIN	.125	20 G	11 G	6	6 (43)
120B	30 u" GOLD/10 u" GOLD	.180	20 G	11 G	6	6 (43)
003A	30 u" GOLD/200 u" TIN	.100	20 G	11 G	6	6 (43)
509A	30 u" GOLD/10 u" GOLD	.125	20 G	11 G	6	6 (43)
009A	30 u" GOLD/200 u" TIN	.150	20 G	12 G	3	3 (48)
011A	10 u" GOLD/200 u" TIN	.125	20 G	11 G	6	6 (43)

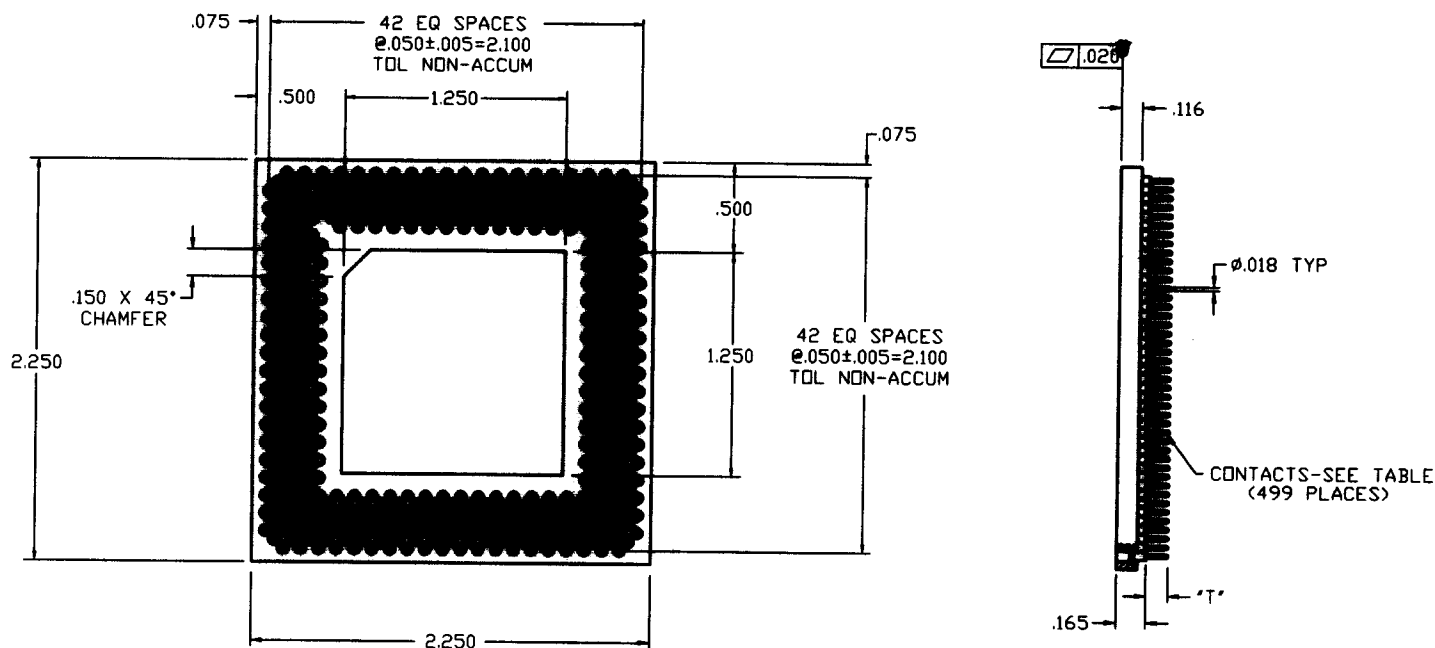

NOTES:

1. INSULATOR MATERIAL: GLASS REINFORCED POLYPHENYLENE SULFIDE (PPS) RATED UL 94V-0, COLOR BLACK.
2. CONTACT MATERIAL:
- OUTER SHELL: BRASS ALLOY 360, 1/2 HARD PER QQ-B-626.
- INNER CONTACT: BERYLLIUM COPPER, ALLOY 172 PER QQ-C-533.

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		F2488HAXX1-43AL						
ltr	ecn no	dr	date	linear	.XX ±.01			projection		Electronics					
A	V00017	DLW	2/15/00		.XXX ±.005					FCI					
					.XXXX ±.0020					www.fciconnect.com					
				angles	0° ±2'					499 POSITIONS PZA (43 X 43) SOCKET					
				dr	D. WOLFORD	2/15/00	INCH	scale	product family	PZA	code	-			
				engr	A. VASBINDER	2/15/00				size		dwg no		sheet	
				chr	A. VASBINDER	2/15/00				A		58516	1 of 1		
				appd	A. VASBINDER	2/15/00									
sheet index	revision sheet	A	1												

499 POSITIONS PZA
(43 X 43) SOCKET

product family	PZA	code
size	dwg no	—
A	58516	sheet 1 of

cage code	22526
-----------	-------

ACAD

PDM: Rev:A

STATUS: **Released** Printed: Apr 09, 2002