

PSS-XX-XX-X-X-XX

No. OF POSITIONS
-02 THRU -20
LEAD STYLE
-01: .080 TAIL (SEE FIG. 1)
(USE C-124-XX-XX)
-02: SURFACE MOUNT (SEE FIG. 2)
(USE C-124-XX-XX)

OPTION
-K: POLYIMIDE
FILM PAD (SEE
SHEET TWO)
-TR: TIPS & REEL
(AVAILABLE ON -02
LEAD STYLE, -02 THRU -14
POSITIONS ONLY)

ROW SPECIFICATION
-S: SINGLE ROW
(USE PSS-20-200)

PLATING SPECIFICATION
-T: TIN (USE C-124-XX-T)
-TM: MATTE TIN (USE C-124-XX-T)
-H: HEAVY GOLD (USE C-124-XX-H)

NOTES:

1. MAX ALLOWABLE BOW: .005 IN/IN AFTER ASSEMBLY
2. PUSHOUT FORCE SHALL BE: 2 lb MINIMUM.
3. (C) REPRESENTS A CRITICAL DIMENSION.
4. INSERTION FORCE: 1.75 LB AVG
5. WITHDRAWAL FORCE: 1.25 LB AVG
6. ENDWALL THICKNESS: .021

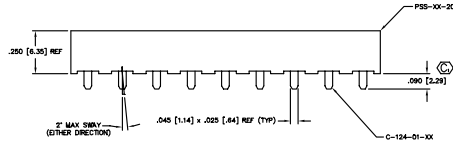


FIG. 1

-01 LEAD STYLE





FIG. 2

-02 SURFACE MOUNT
(SAME AS FIG. 1 UNLESS OTHERWISE STATED)

INPROCESS FOR -02





TABLE 2	
No. OF POS	COPLANARITY
02-14	.008
15-20	.008

PROPRIETARY NOTE
THIS DOCUMENT IS THE PROPERTY OF SAMTEC, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM SAMTEC, INC.



PT-1-24-06-29



PT-1-24-11-09

TABLE 1			
LEAD STYLE	PACKAGING TUBE	PLUG	
-01	PT-1-24-11-09	TP-24	
-02	PT-1-24-06-29	TP-03	

MATERIAL:

INSULATOR: VECTRA E130I
COLOR: BLACK
CONTACT: BeCu 174 HT

MAX FLASH ALLOWED: .020 [.51]

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (815) 944-8733 F.O. BOX 1147
CODE 55322

WAVE NR: PURVIS 08-13-98

PSS-XX-XX-X-X-XX

MISC/MKTG
PSS-MKT1