


Part Number Key




Housing: Receptacle (Series S, B, F)

G 7

Style 7

ODU-MINI-SNAP RECEPTACLE WITH STRAIN RELIEF, installation from front of panel.

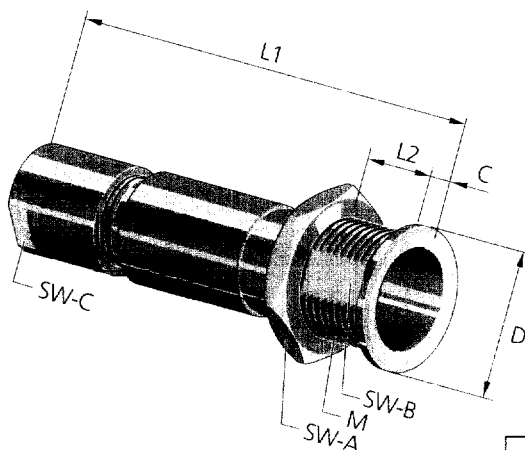

Technical Data


- IP 50 in mated condition
- anti-rotation feature
- Contact inserts from Page 16

Size	Dimensions in mm							
	L1	L2	M	D	SW-A	SW-B	SW-C	C
0	~36	~7	9x0,5	10	11	8,2	7	1,5
1	~41	~7	12x1	14	14	10,5	10	1,5
2	~50	~9	15x1	18	17	13,5	12	2
3	~58	~12	18x1	22	22	16,5	15	2

G 8

Style 8

ODU-MINI-SNAP, HERMETIC-RECEPTACLE, installation from rear of panel.

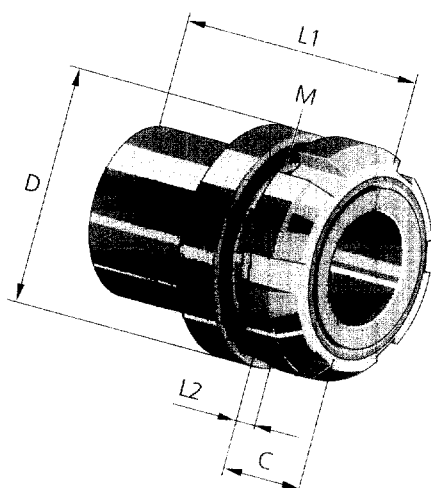

Technical Data

- IP 67 *
- anti-rotation feature
- Contact inserts from Page 16

Size	Dimensions in mm					
	L1	L2	M	D	SW-A	C
0	~22	~3,5	10x0,5	16,5	12	6,5
1	~26	~4	14x1	18	14	8
2	~26	~4,5	16x1	22	18	8
3	~30	~5	20x1	27	24	10

* connector water - tightness depending on the device it is mounted on