

The HS/HSN Series offers greater power capacity (100 and 250 watts) in the same design format as Ohmite's 89 Series.

HS/HSN Series maintains the same construction, materials, and manufacturing techniques as the 89 Series. As a made-to-order product, it is recommended for higher volume applications.

FEATURES

- Standard winding (Model HS)
- Non-inductive winding (Model HSN)
- Molded construction for total environmental protection
- Complete welded construction
- Mounts on chassis to utilize heat-sink effect
- High stability at conventional power ratings
- Flat marking surface for easy identification
- RoHS compliant; add "E" suffix to part number to specify.

SPECIFICATIONS

Material

Housing: Aluminum with hard anodic coating.

Internal Coating: Silicone.

Core: Ceramic.

Terminals: Solder-coated axial

Derating: Linearly from 100% @ +25°C to 0% @ +275°C.

Electrical

Tolerance: ±1% and ±5% (other tolerances available).

Power rating: Rating is based on chassis mounting area and temperature stability. Proper heat sink: 12" x 12" x 0.125 Aluminum panel.

Maximum ohmic values:

See chart.

Overload: 5 times rated wattage for 5 seconds.

Temperature coefficient:

Under 1Ω: ±90 ppm/°C

1 to 9.99Ω: ±50 ppm/°C

10Ω and over: ±30 ppm/°C.


Dielectric withstanding voltage:

4500VAC.



HS/HSN Series

Aluminum Housed Axial Terminal Wirewound, Industrial/Commercial Grade

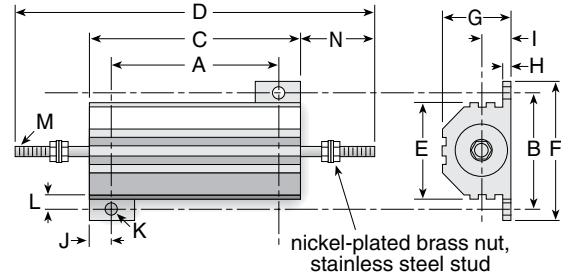


Series	Power Rating (Watts)	Resistance Range (Ohms)	Max. Working Voltage
HS100	100	.05 - 29.4K	1900
HSN100	100	1.0 - 14.7K	1350
HS250	250	.10 - 35.7K	2300
HSN250	250	1.0 - 17.4K	1625

DIMENSIONS

in. (mm)	HS100 / HSN100	HS250 / HSN250
	100 watt	250 watt
Dim. A	2.75 ± .010 (69.85 ± .254)	3.875 ± .010 (98.425 ± .254)
Dim. B	2.25 ± .010 (57.15 ± .254)	2.5 ± .010 (63.50 ± .254)
Dim. C	3.50 ± .031 (88.90 ± .787)	4.5 ± .031 (114.30 ± .787)
Dim. D	5.478 ± .093 (139.14 ± 2.36)	6.73 ± .093 (170.94 ± 2.36)
Dim. E	1.812 ± .031 (46.02 ± .787)	2.125 ± .031 (53.98 ± .787)
Dim. F	2.812 ± .031 (71.42 ± .787)	3.0 ± .031 (76.20 ± .787)
Dim. G	1.75 ± .031 (44.45 ± .787)	2.188 ± .031 (55.58 ± .787)
Dim. H	1.88 ± .031 (4.78 ± .787)	0.250 ± .031 (6.35 ± .787)
Dim. I	0.770 ± .015 (19.56 ± .381)	0.955 ± .015 (24.26 ± .381)
Dim. J	0.375 ± .031 (9.52 ± .787)	0.312 ± .031 (7.92 ± .787)
Dim. K	0.188 ± .010 (4.78 ± .254)	0.188 ± .010 (4.78 ± .254)
Dim. L	0.219 ± .031 (5.56 ± .787)	0.25 ± .031 (6.35 ± .787)
Dim. M	12 - 24 UNC - 2A THD	1/4 - 20 UNC - 2A THD
Dim. N	0.989 ± .031 (25.12 ± .787)	1.25 ± .031 (31.75 ± .787)

DERATING CURVE

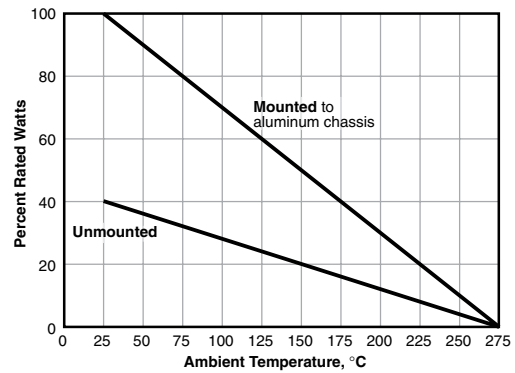

ORDERING INFORMATION

Non-Inductive Winding
Optional (blank = std. winding)

HSN100JR05E

Series	Wattage	Tolerance	Ohms	RoHS Compliant
100	F = 1%	R05 = 0.05Ω		
250	J = 5%	1R0 = 1.0Ω		
	K = 10%	10R = 10Ω		
		100 = 100Ω		
		10K = 10,000Ω		
		14K7 = 14,700Ω		

Check product availability at www.ohmite.com

To see the latest in resistor technology click on the "What's New" tab at ohmite.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ohmite:

[HS100F1R0E](#) [HS250J1R0E](#) [HS250JR05E](#) [HS250F10RE](#) [HS100F14K7E](#) [HS100F10RE](#) [HS100FR05E](#)
[HS100J100E](#) [HS100J1R0E](#) [HS250J100E](#) [HS250J10RE](#) [HS250J10KE](#) [HS100J14K7E](#) [HS250F14K7E](#) [HS100J10RE](#)
[HS100F10KE](#) [HS250F100E](#) [HS250F1R0E](#) [HS100F100E](#) [HS100JR05E](#) [HS250F10KE](#) [HS250FR05E](#) [HS100J10KE](#)
[HS250J14K7E](#) [HS250F20R](#) [HS250F135E](#) [HSN250F2R5E](#)