


# 1SS222

## ■ Features

- Low capacitance:  $C_t = 4.0 \text{ pF MAX.}$
- High speed switching:  $t_{rr} = 3.0 \text{ ns MAX.}$
- Wide applications including switching, limitter clipper.

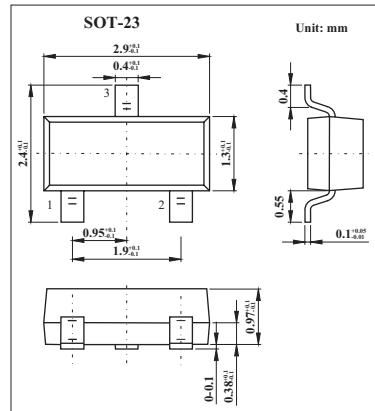

## ■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Peak Reverse Voltage	V <sub>RM</sub>	70	V
DC Reverse Voltage	V <sub>R</sub>	70	V
Peak Forward Current	I <sub>FM</sub>	300	mA
Average Rectified Current	I <sub>O</sub>	100	mA
DC Forward Current	P	100	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature Range	T <sub>stg</sub>	-55 to + 150	°C
Junction to Ambient	R <sub>th(j-a)</sub>	0.67	°C/mW

## ■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Continuous reverse voltage	V <sub>F</sub>	I <sub>F</sub> = 10 mA		720	850	mV
		I <sub>F</sub> = 50 mA		850	1000	
		I <sub>F</sub> = 100 mA		950	1200	
Reverse current	I <sub>R</sub>	V <sub>R</sub> = 70 V			1.0	μ A
capacitance	C <sub>t</sub>	V <sub>R</sub> = 0, f = 1.0 MHz		2.0	4.0	pF
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> = 10 mA, V <sub>R</sub> = 6 V, R <sub>L</sub> = 100 Ω			3.0	ns

## ■ Marking

Marking	A7
---------	----