

| | | | |
|---|---|--------------------------------|-----------------------------|
| TITLE LM259X Inductor 330 μ Hy .30 ADC | SCHOTT CORPORATION 1000 PARKERS LAKE ROAD WAYZATA, MN 55391 | AGENCY APPROVAL: N/A | PART NUMBER 34536 |
| | | REV A | PAGE 1 |


Old Schott P/N: 67143950

ELECTRICAL CHARACTERISTICS
 Specifications at room temperature (ref. 25°C)

- INDUCTANCE: @ 10 kHz, 0.1 Vrms,
 (1 thru 3 to 4 thru 6) = 330 - 420 μ H
- DC RESISTANCE:
 (1 thru 3 to 4 thru 6) = .70 Ohms Max.
- SRF: 1.1 MHZ Min.
- HIPOT: 500 VDC
 WINDING TO CORE
 2 SEC., 5 mA MAX

GENERAL NOTES:

- Current rating is the current at which the inductance is a minimum of 90% of the rated value.
- All pins may not be used; electrical schematic is based on the standard footprint.

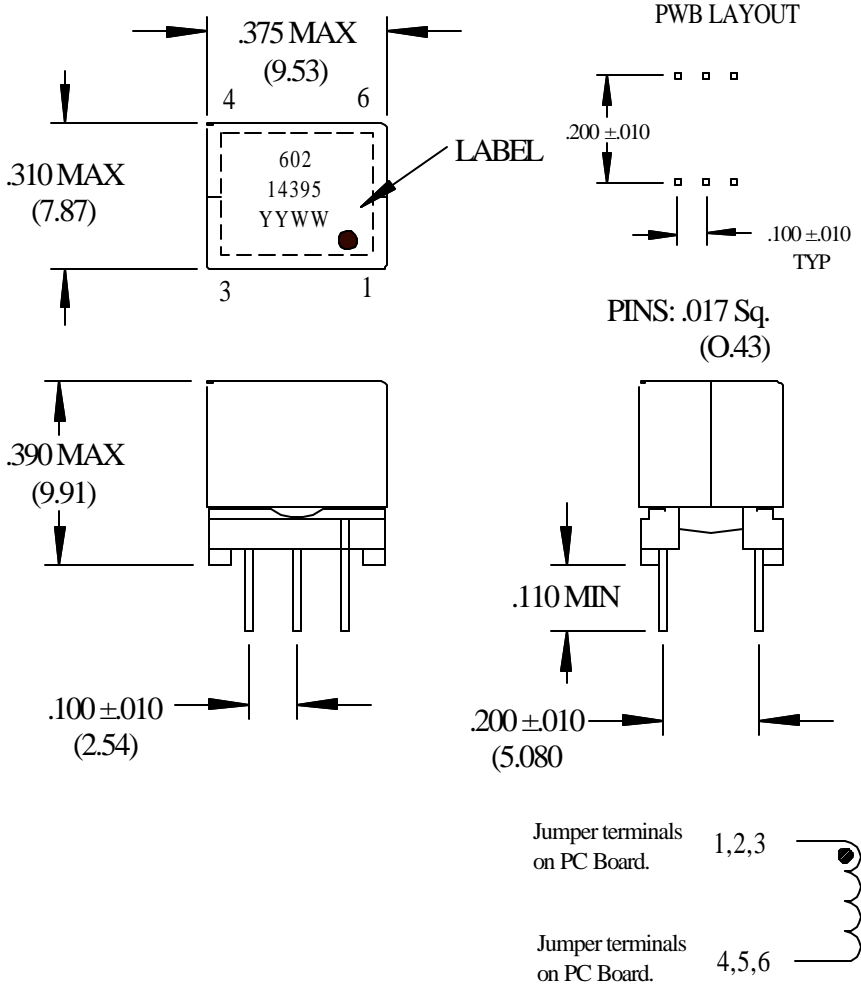

| | | | |
|--------------------------------------|------------------|-------------------|--------------|
| TOLERANCES UNLESS OTHERWISE NOTED | 2 PLACE + .03 | 3 PLACE + .010 | ANGLE + ° |
|--------------------------------------|------------------|-------------------|--------------|