

Am29861 - 64

High Performance Bus Transceivers

Am29861 - 64

DISTINCTIVE CHARACTERISTICS

- High-speed symmetrical bidirectional transceivers
 - Noninverting $t_{PD} = 5.0ns$ typ
 - Inverting $t_{PD} = 4.5ns$ typ
- 200mV minimum input hysteresis on input data ports
- Three-state outputs glitch-free during power-up and down. Outputs have Schottky clamp to ground
- 48mA commercial I_{OL} , 32mA military I_{OL}
- Low input/output capacitance
- I_{OH} specified 2.0V and 2.4V


GENERAL DESCRIPTION

The Am29860 Series bus transceivers provide high performance bus interface buffering for wide data/address paths or buses carrying parity. The Am29863/64 9-bit transceivers have NOR-ed output enables for maximum control flexibility. All transceiver data inputs have 200mV minimum input hysteresis to provide improved noise rejection.

All of the Am29800 high performance interface family are designed for high capacitance load drive capability while providing low capacitance bus loading at both inputs and outputs. All inputs are Schottky diode inputs, and all outputs are designed for low capacitance bus loading in the high impedance state.

BLOCK DIAGRAM

Am29861/Am29862 10-BIT TRANSCEIVERS

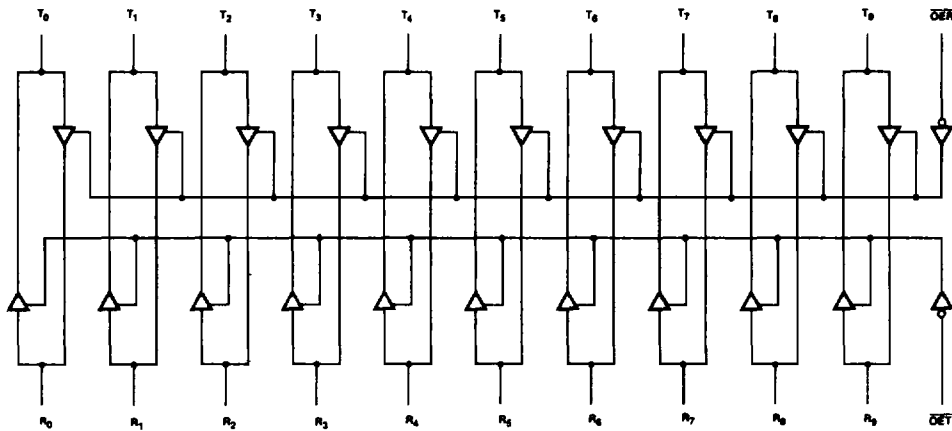


BD001060

8


CONNECTION DIAGRAM Top View

Am29861/Am29862 10-BIT TRANSCEIVERS

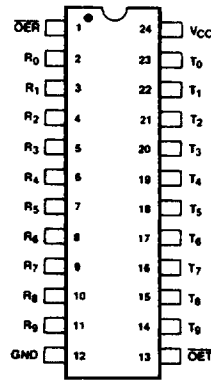

CD001150


LOGIC SYMBOL



Am29861 (NONINVERTING)
LS000370

ORDERING INFORMATION

AMD products are available in several packages and operating ranges. The order number is formed by a combination of the following: Device number, speed option (if applicable), package type, operating range and screening option (if desired).

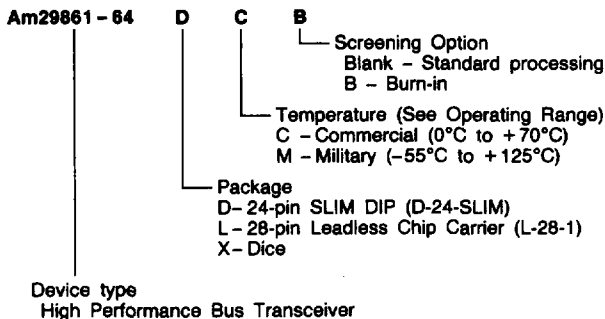


Valid Combinations	
Am29861	DC, DCB, DM, DMB
Am29862	LC, LCB, LM, LMB
Am29863	XC, XM
Am29864	

Valid Combinations
Consult the AMD sales office in your area to determine if a device is currently available in the combination you wish.


**CONNECTION DIAGRAM
Top View**

Am29863/Am29864 9-BIT TRANSCEIVERS

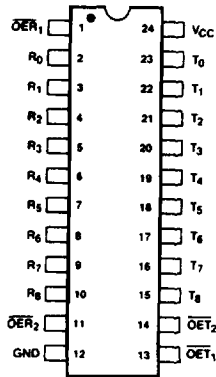

CD001140

LOGIC SYMBOL



Am29863 (NONINVERTING)
LS000380

PIN DESCRIPTION

Pin No.	Name	I/O	Description
Am29861/Am29862			
1	\overline{OER}	I	When LOW in conjunction with \overline{OET} HIGH activates the RECEIVE mode.
13	\overline{OET}	I	When LOW in conjunction with \overline{OER} HIGH activates the TRANSMIT mode.
	R_i	I/O	10-bit RECEIVE input/output.
	T_i	I/O	10-bit TRANSMIT input/output.
Am29863/Am29864			
	\overline{OER}_i	I	When both are LOW in conjunction with any \overline{OET}_i HIGH indicates the RECEIVE mode.
	\overline{OET}_i	I	When both are LOW in conjunction with any \overline{OER}_i HIGH indicates the TRANSMIT mode.
	R_i	I/O	9-bit RECEIVE input/output.
	T_i	I/O	9-bit TRANSMIT input/output.

FUNCTION TABLES

Am29861/Am2983 (Noninverting)


Inputs				Outputs		Function
\overline{OET}	\overline{OER}	R_i	T_i	R_i	T_i	
L	H	L	N/A	N/A	L	Transmitting
L	H	H	N/A	N/A	H	Transmitting
H	L	N/A	L	L	N/A	Receiving
H	L	N/A	H	H	N/A	Receiving
H	H	X	X	Z	Z	Hi-Z

Am29862/Am29864 (Inverting)

Inputs				Outputs		Function
\overline{OET}	\overline{OER}	R_i	\overline{T}_i	R_i	\overline{T}_i	
L	H	L	N/A	N/A	H	Transmitting
L	H	H	N/A	N/A	L	Transmitting
H	L	N/A	L	H	N/A	Receiving
H	L	N/A	H	L	N/A	Receiving
H	H	X	X	Z	Z	Hi-Z

H = HIGH
L = LOW
Z = High Impedance

X = Don't Care
N/A = Not Applicable

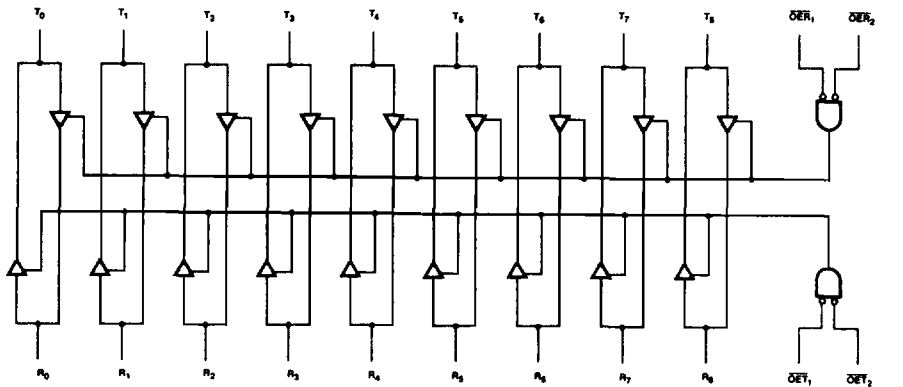Am29863/Am29864
9-BIT TRANSCEIVERS

ABSOLUTE MAXIMUM RATINGS

Storage Temperature	-65°C to +150°C
Ambient Temperature with Power Applied	-55°C to +125°C
Supply Voltage to Ground Potential Continuous	-0.5V to +7.0V
DC Voltage Applied to Output for High Output State	-1.5V to V_{CC} max
DC Input voltage	-0.5V to +5.5V
DC Output Current, Into Outputs	100mA
DC Input Current	-30mA to +5.0mA

Stresses above those listed under **ABSOLUTE MAXIMUM RATINGS** may cause permanent device failure. Functionality at or above these limits is not implied. Exposure to absolute maximum ratings for extended periods may affect device reliability.

OPERATING RANGES


Commercial (C) Devices	
Temperature	0°C to +70°C
Supply Voltage	+4.75V to +5.25V
Military (M) Devices	
Temperature	-55°C to +125°C
Supply Voltage	+4.5V to +5.5V

Operating ranges define those limits over which the functionality of the device is guaranteed.

DC CHARACTERISTICS over operating range unless otherwise specified

Parameter	Description	Test Conditions	Min	Typ	Max	Units	
V_{OH}	Output HIGH Voltage	$V_{CC} = \text{MIN}$ $V_{IN} = V_{IH}$ or V_{IL}	$I_{OH} = -15\text{mA}$	2.4			V
			$I_{OH} = -24\text{mA}$	2.0			
V_{OL}	Output LOW Voltage	$V_{CC} = \text{MIN}$ $V_{IN} = V_{IH}$ or V_{IL}	MIL, $I_{OL} = 32\text{mA}$			0.5	V
			COM'L, $I_{OL} = 48\text{mA}$			0.5	
V_{IH}	Input HIGH Level	Guaranteed input logical HIGH voltage for all inputs	2.0			V	
V_{IL}	Input LOW Level	Guaranteed input logical LOW voltage for all inputs			0.8	V	
V_I	Input Clamp Voltage	$V_{CC} = \text{MIN}$, $I_{IN} = -18\text{mA}$			-1.2	V	
V_{HYST}	Input Hysteresis	Tested output is connected to AC load test circuit	200			mV	
I_{IL}	Input LOW Current	$V_{CC} = \text{MAX}$, $V_{IN} = 0.4\text{V}$			-1.0	mA	
I_{IH}	Input HIGH Current	$V_{CC} = \text{MAX}$, $V_{IN} = 2.7\text{V}$			50	μA	
I_I	Input HIGH Current	$V_{CC} = \text{MAX}$, $V_{IN} = 5.5\text{V}$			1.0	mA	
I_{OZH}	Output Off-State Output Current (HI-Z)	$V_{CC} = \text{MAX}$, $V_O = 2.4\text{V}$			50	μA	
I_{OZL}	Output Off-State Output Current (HI-Z)	$V_{CC} = \text{MAX}$, $V_O = 0.4\text{V}$			-1.0	mA	
I_{SC}	Output Short Circuit Current	$V_{CC} = \text{MAX}$	-75		-250	mA	
I_{CC}	Supply Current	$V_{CC} = \text{MAX}$ Outputs Open	Over Temperature Range			160	mA
			+70°C			150	
			+125°C			140	

SWITCHING TEST CIRCUIT

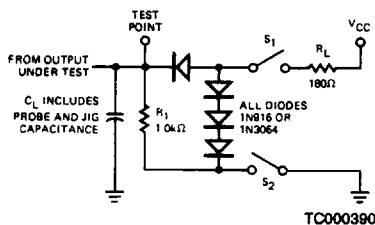

Note: Pulse Generator for All Pulses: Rate \leq 10MHz; $Z_0 = 50\Omega$; $t_r \leq 2.5ns$; $t_f \leq 2.5ns$.

SWITCHING CHARACTERISTICS ($T_A = +25^\circ C$, $V_{CC} = 5.0V$)


Parameters	Description	Test Conditions	Min	Typ	Max	Units
t_{PLH}	Propagation Delay from R_i to T_i or T_i to R_i Am29861/Am29863 (Noninverting)	$C_L = 50pF$		4.8	6.0	ns
t_{PHL}				5.2	6.2	ns
t_{PLH}		$C_L = 300pF$		8	11	ns
t_{PHL}				11	14	ns
t_{PLH}	Propagation Delay from R_i to T_i or T_i to R_i Am29862/Am29864 (Inverting)	$C_L = 50pF$		4.0	5.2	ns
t_{PHL}				4.9	5.9	ns
t_{PLH}		$C_L = 300pF$		7.3	10	ns
t_{PHL}				10.5	12.9	ns
t_{ZH}	Output Enable Time \overline{OET} to T_i and \overline{OER} to R_i	$C_L = 50pF$		6.5	12	ns
t_{ZL}				9.5	12	ns
t_{ZH}		$C_L = 300pF$		11	17	ns
t_{ZL}				17	21	ns
t_{HZ}	Output Disable Time \overline{OET} to T_i and \overline{OER} to R_i	$C_L = 5pF$		3.5	8.0	ns
t_{LZ}				3.5	8.0	ns
t_{HZ}		$C_L = 50pF$		11.2	18	ns
t_{LZ}				4.5	9.0	ns

SWITCHING CHARACTERISTICS over operating range unless otherwise specified


Parameters	Description	Test Conditions	COMMERCIAL		MILITARY		Units
			Min	Max	Min	Max	
t_{PLH}	Propagation Delay from R_i to T_i or T_i to R_i Am29861/Am29863 (Noninverting)	$C_L = 50pF$		8		10	ns
t_{PHL}				8		10	ns
t_{PLH}		$C_L = 300pF$		15		17	ns
t_{PHL}				15		17	ns
t_{PLH}	Propagation Delay from R_i to T_i or T_i to R_i Am29862/Am29864 (Inverting)	$C_L = 50pF$		7.0		9.0	ns
t_{PHL}				7.5		9.5	ns
t_{PLH}		$C_L = 300pF$		14		16	ns
t_{PHL}				14		16	ns
t_{ZH}	Output Enable Time \overline{OET} to T_i or \overline{OER} to R_i	$C_L = 50pF$		15		17	ns
t_{ZL}				15		17	ns
t_{ZH}		$C_L = 300pF$		20		22	ns
t_{ZL}				23		25	ns
t_{HZ}	Output Disable Time \overline{OET} to T_i or \overline{OER} to R_i	$C_L = 5pF$		9		10	ns
t_{LZ}				9		10	ns
t_{HZ}		$C_L = 50pF$		17		19	ns
t_{LZ}				12		12	ns

SWITCHING WAVEFORMS

PROPAGATION DELAY

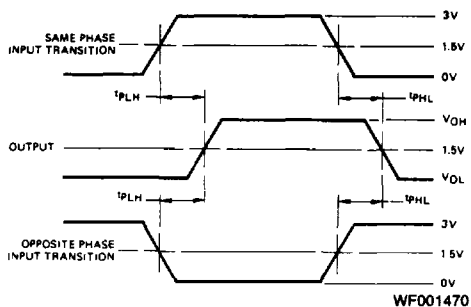

ENABLE AND DISABLE TIMES

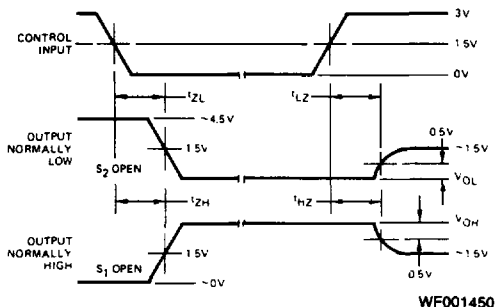

- Notes: 1. Diagram shown for Input Control Enable-LOW and Input Control Disable-HIGH.
 2. S_1 and S_2 of Load Circuit are closed except where shown.