

Pb Free Plating Product


BY229200 thru BY229800



8.0 Ampere Heatsink Glass Passivated Ultra Fast Recovery Rectifiers

- Features**
- * Fast switching for high efficiency
 - * Low forward voltage drop
 - * High current capability
 - * Low reverse leakage current
 - * High surge current capability
- Application**
- * Switching mode power supply
 - * Inverter/converter
 - * TV receiver, monitor/set top box

- Mechanical Data**
- * Case: TO-220AC Heatsink Package
 - * Epoxy: UL 94V-0 rate flame retardant
 - * Terminals: Solderable per MIL-STD-202 method 208
 - * Polarity: As marked on diodes body
 - * Mounting position: Any
 - * Weight: 2.03 grams approximately

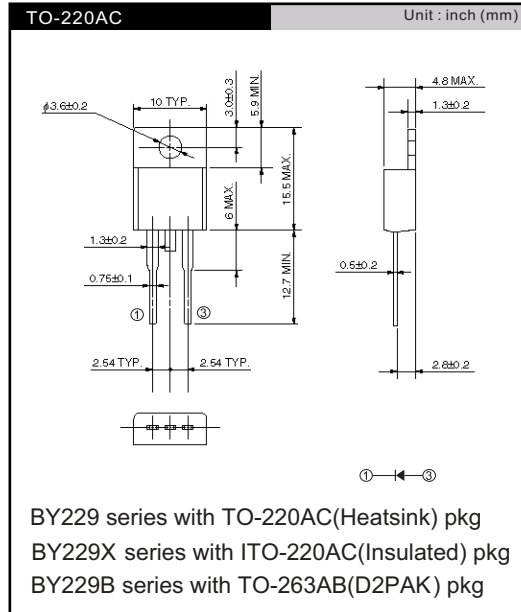

MAXIMUM RATINGS ($T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	BY229200 BY229-200	BY229400 BY229-400	BY229600 BY229-600	BY229800 BY229-800	UNIT
Maximum recurrent peak reverse voltage	V_{RRM}	200	400	600	800	V
Maximum RMS voltage	V_{RMS}	140	280	420	560	V
Maximum DC blocking voltage	V_{DC}	200	400	600	800	V
Maximum average forward rectified current at $T_C = 100\text{ }^\circ\text{C}$	$I_{F(AV)}$	8.0				A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	100				A
Maximum slope of reverse recovery current $I_F = 2.0\text{ A}$, $V_R = 30\text{ V}$, $di/dt = 20\text{ }\mu\text{s}$	di/dt	60				A/ μs
Operating junction and storage temperature range	T_J, T_{STG}	- 40 to + 150				$^\circ\text{C}$
Isolation voltage (ITO-220AC only) from terminal to heatsink $t = 1\text{ min}$	V_{AC}	1500				V

ELECTRICAL CHARACTERISTICS ($T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)

PARAMETER	TEST CONDITIONS	SYMBOL	BY229200 BY229-200	BY229400 BY229-400	BY229600 BY229-600	BY229800 BY229-800	UNIT
Maximum instantaneous forward voltage ⁽¹⁾	8.0 A	V_F	0.98	1.3	1.7	1.8	V
Maximum DC reverse current at rated DC blocking voltage	$T_J = 25\text{ }^\circ\text{C}$ $T_J = 125\text{ }^\circ\text{C}$	I_R	10 250				μA
Maximum reverse recovery time	$I_F = 1.0\text{ A}$, $V_R = 30\text{ V}$, $di/dt = 50\text{ A}/\mu\text{s}$, $I_{rr} = 10\% I_{RM}$	t_{rr}	35			50	ns
Maximum recovered stored charge	$I_F = 2.0\text{ A}$, $V_R = 30\text{ V}$, $di/dt = 20\text{ A}/\mu\text{s}$	Q_{rr}	700				nC

Note: (1) Pulse test: 300 μs pulse width, 1 % duty cycle

THERMAL CHARACTERISTICS ($T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	BY229 series	BY229X series	BY229B series	UNIT
Typical thermal resistance from junction to case	$R_{\theta JC}$	2.0	4.8	2.0	$^\circ\text{C}/\text{W}$
Typical thermal resistance from junction to air	$R_{\theta JA}$	20	-	20	$^\circ\text{C}/\text{W}$

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

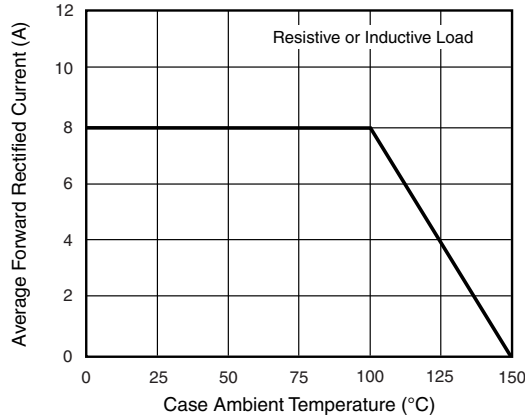


Figure 1. Forward Current Derating Curve

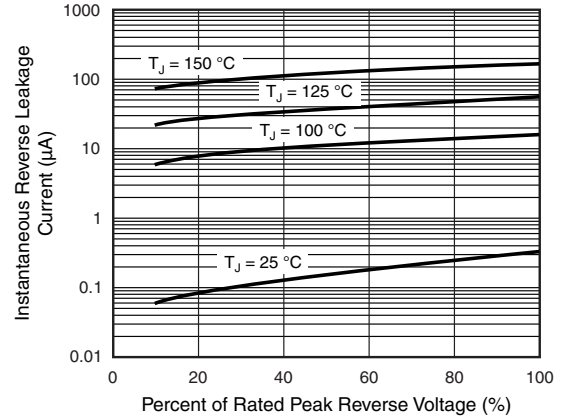


Figure 4. Typical Reverse Leakage Characteristics

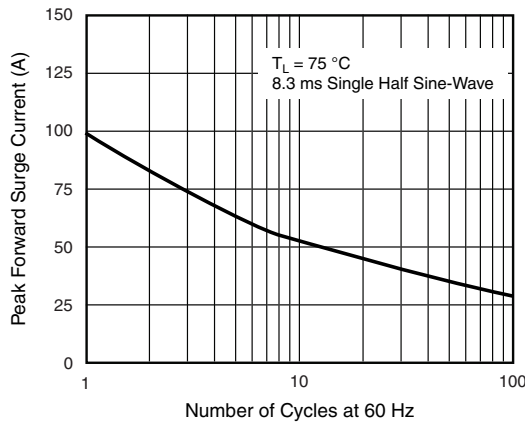


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

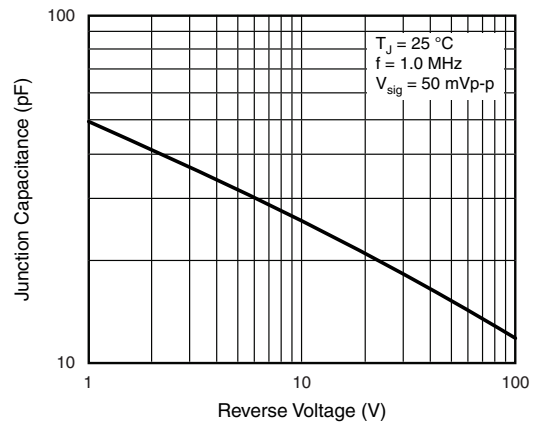


Figure 5. Typical Junction Capacitance

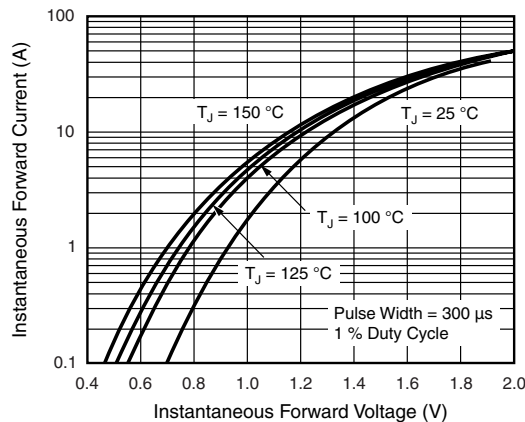


Figure 3. Typical Instantaneous Forward Characteristics