



Agilent T-1 $\frac{3}{4}$ (5mm) Extra Bright Precision Optical Performance White LED Lamps. Data Sheet

HLMP-CW46, HLMP-CW47. HLMP-CW76, HLMP-CW77

Description

These high intensity white LED lamps are based on InGaN material technology. A blue LED die is coated by phosphor to produce white. The typical resulting color is described by the coordinates $x = 0.31$, $y = 0.31$ using the 1931 CIE Chromaticity Diagram.

These T-1 $\frac{3}{4}$ lamps are untinted, diffused, and incorporate precise optics which produce well-defined spatial radiation patterns at specific viewing cone angle.

Features

- Well defined spatial radiation pattern
- High luminous white emission
- Viewing angle: 50° and 70°.
- Standoff or non-standoff leads
- Superior resistance to moisture

Applications

- Electronic signs and signals
- Small area illumination
- Legend backlighting
- General purpose indicators

Benefit

- Reduced power consumption, higher reliability, and increased optical/mechanical design flexibility compared to incandescent bulbs and other alternative white light sources.


Caution: Devices are Class 1 ESD sensitive. Please observe appropriate precautions during handling and processing. Refer to Application Note AN-1142 for additional details.




Agilent Technologies

Package Dimensions

Package Dimension A

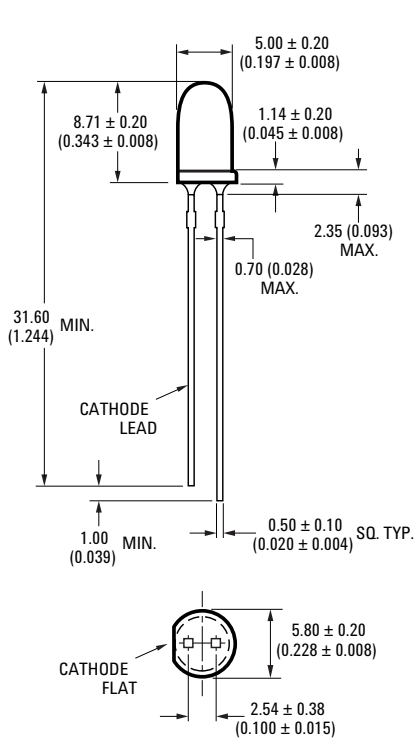

Package Dimension B

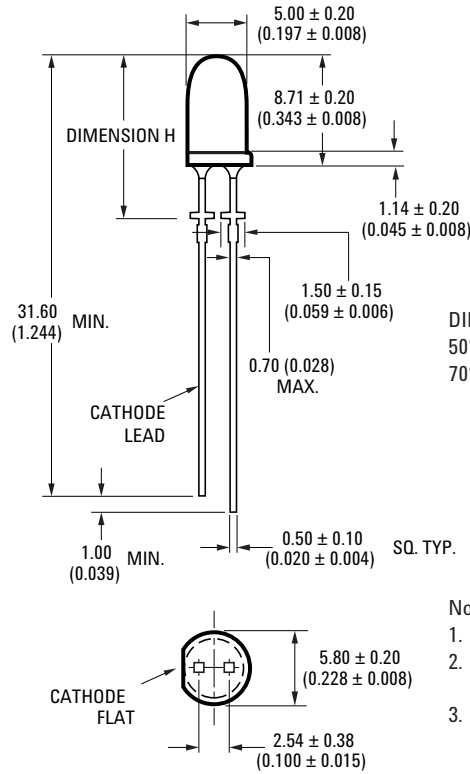

DIMENSION H:
 50°: 11.98 ± 0.25mm (0.4715 ± 0.01 inches)
 70°: 11.09 ± 0.25mm (0.4365 ± 0.01 inches)

Notes:

1. All dimensions are in millimeters / inches.
2. Epoxy meniscus may extend about 1mm (0.040") down the leads.
3. If heat-sinking application is required, the terminal for heat sink is anode.

Part Numbering System

H L M P - CW XX - X X X XX

Mechanical Option

- 00: Bulk
- DD: Ammo Pack Straight Leads

Color Bin Options

- 0: Full color bin distribution
- B: Color bin 2 & 3 only

Maximum Intensity Bin

- 0: No maximum intensity bin limit
- Others: Refer to Device Selection Guide

Minimum Intensity Bin

Refer to Device Selection Guide

Viewing Angle and Standoff Option

- 46: 50° without standoff
- 47: 50° with standoff
- 76: 70° without standoff
- 77: 70° with standoff

Device Selection Guide

Part Number	Typical Viewing Angle, 2θ ½ (Degree)	Intensity (mcd) at 20 MA		Standoff	Package Dimension
		Min.	Max.		
HLMP-CW46-PS0xx	50	880	2500	No	A
HLMP-CW46-QR0xx	50	1150	1900	No	A
HLMP-CW46-QRBxx	50	1150	1900	No	A
HLMP-CW46-RU0xx	50	1500	4200	No	A
HLMP-CW46-ST0xx	50	1900	3200	No	A
HLMP-CW46-STBxx	50	1900	3200	No	A
HLMP-CW47-PS0xx	50	880	2500	Yes	B
HLMP-CW47-QR0xx	50	1150	1900	Yes	B
HLMP-CW47-QRBxx	50	1150	1900	Yes	B
HLMP-CW47-RU0xx	50	1500	4200	Yes	B
HLMP-CW47-ST0xx	50	1900	3200	Yes	B
HLMP-CW47-STBxx	50	1900	3200	Yes	B
HLMP-CW76-NR0xx	70	680	1900	No	A
HLMP-CW76-PQ0xx	70	880	1500	No	A
HLMP-CW76-PQBxx	70	880	1500	No	A
HLMP-CW76-QT0xx	70	1150	3200	No	A
HLMP-CW76-RS0xx	70	1500	2500	No	A
HLMP-CW76-RSBxx	70	1500	2500	No	A
HLMP-CW77-NR0xx	70	680	1900	Yes	B
HLMP-CW77-PQ0xx	70	880	1500	Yes	B
HLMP-CW77-PQBxx	70	880	1500	Yes	B
HLMP-CW77-QT0xx	70	1150	3200	Yes	B
HLMP-CW77-RS0xx	70	1500	2500	Yes	B
HLMP-CW77-RSBxx	70	1500	2500	Yes	B

Notes:

1. Tolerance for luminous intensity measurement is +/- 15%
2. The luminous intensity is measured on the mechanical axis of the lamp package.
3. The optical axis is closely aligned with the package mechanical axis.
4. 2θ_{1/2} is the off-axis angle where the luminous intensity is ½ the on axis intensity
5. Part numbers in **BOLD** are recommended for new designs.

Absolute Maximum Rating at $T_A = 25^\circ\text{C}$

Parameters	Value	Unit
DC forward current ^[1]	30	mA
Peak pulsed forward current ^[2]	100	mA
Power dissipation	105	mW
LED junction temperature	110	$^\circ\text{C}$
Operating temperature range	-40 to +85	$^\circ\text{C}$
Storage temperature range	-40 to +100	$^\circ\text{C}$
Wave soldering temperature ^[3]	250 for 3 seconds	$^\circ\text{C}$
Solder dipping temperature ^[3]	260 for 5 seconds	$^\circ\text{C}$

Notes:

1. Derate linearly as shown in figure 2.
2. Duty factor 10%, frequency 1KHz
3. 1.59 mm (0.060 inch) below body

Electrical/Optical Characteristics $T_A = 25^\circ\text{C}$

Parameters	Symbol	Min	Typ	Max	Units	Test Condition
Forward voltage	V_F		3.2	4.0	V	$I_F = 20 \text{ mA}$
Reverse Voltage ^[1]	V_R	5.0			V	$I_R = 10 \mu\text{A}$
Thermal resistance	$R\theta_{J-PIN}$		240		$^\circ\text{C}/\text{W}$	LED Junction to anode lead
Chromaticity Coordinates ^[2]	X Y		0.31 0.31			$I_F = 20 \text{ mA}$
Capacitance	C		70			$V_f=0, f=1\text{MHz}$

Notes:

1. The reverse voltage of the product is equivalent to the forward voltage of the protective chip at $I_R = 10 \mu\text{A}$
2. The chromaticity coordinates are derived from the CIE 1931 Chromaticity Diagram and represent the perceived color of the device.

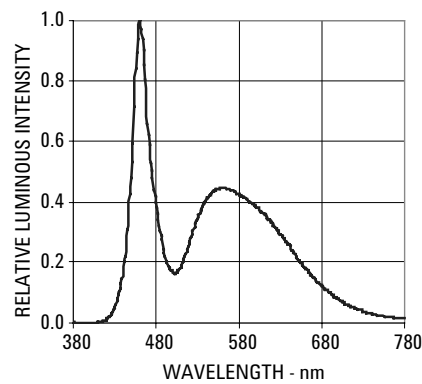


Figure 1. Relative Intensity vs. Wavelength

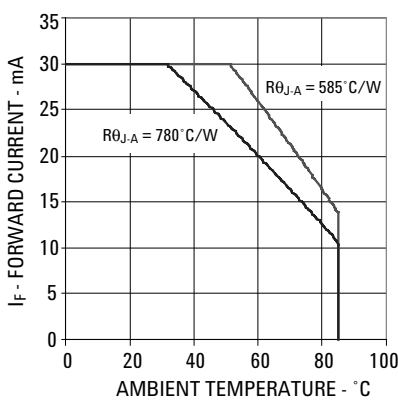


Figure 2. Forward Current vs. Ambient Temperature

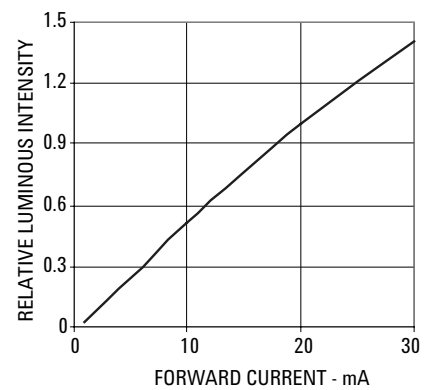


Figure 3. Relative Intensity versus DC Forward Current

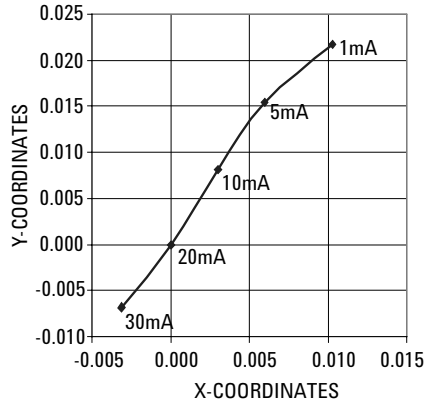


Figure 4. Chromaticity shift vs. Current

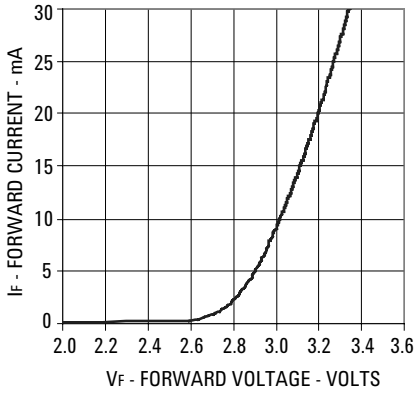


Figure 5. Forward Current vs. Forward Voltage

*Note: (x,y) values @ 20mA reference to (0,0)

Intensity Bin Limit Table

Bin	Intensity (mcd) at 20 mA	
	Min	Max
N	680	880
P	880	1150
Q	1150	1500
R	1500	1900
S	1900	2500
T	2500	3200
U	3200	4200

Tolerance for each bin limit is $\pm 15\%$

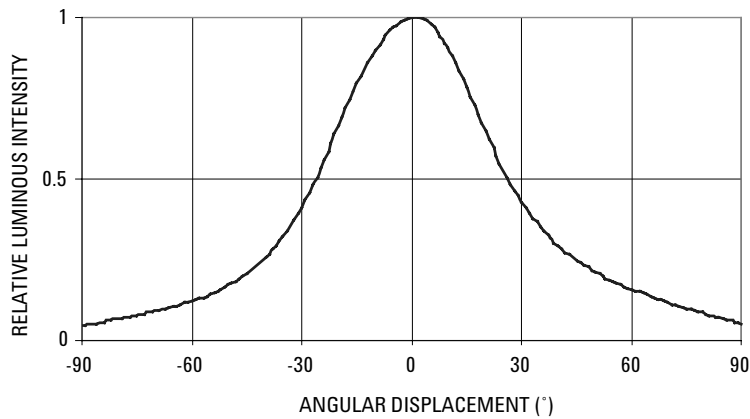


Figure 6. Spatial Radiation Pattern for CW4x

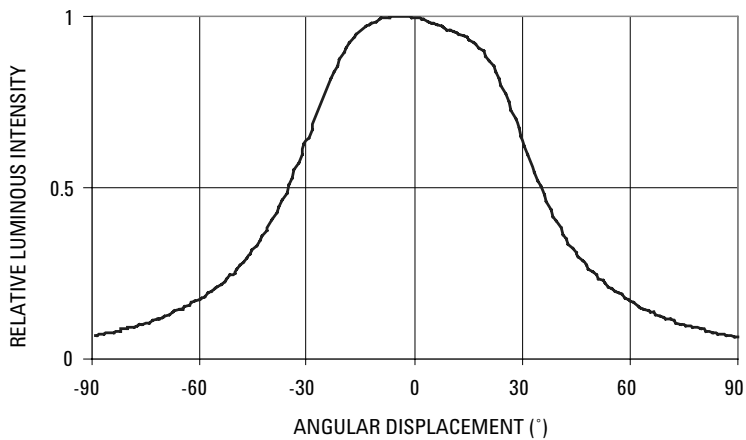


Figure 7. Spatial Radiation Pattern for CW7x

Color Bin Limit Table


Rank	Limits (Chromaticity Coordinates)				
1	X	0.330	0.330	0.356	0.361
	Y	0.360	0.318	0.351	0.385
2	X	0.287	0.296	0.330	0.330
	Y	0.295	0.276	0.318	0.339
3	X	0.264	0.280	0.296	0.283
	Y	0.267	0.248	0.276	0.305
4	X	0.283	0.287	0.330	0.330
	Y	0.305	0.295	0.339	0.360

Tolerance for each bin limit is ± 0.01

Note:

- Bin categories are established for classification of products. Products may not be available in all bin categories. Please contact your Agilent representative for information on currently available bins.

Color Bin Limits with Respect to CIE 1931 Chromaticity Diagram

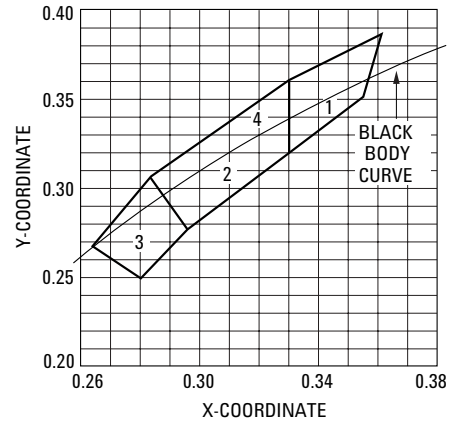

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312
or (408) 654-8675

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6756 2394

India, Australia, New Zealand: (+65) 6755 1939

Japan: (+81 3) 3335-8152(Domestic/International), or 0120-61-1280(Domestic Only)

Korea: (+65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand, Philippines, Indonesia: (+65) 6755 2044

Taiwan: (+65) 6755 1843

Data subject to change.

Copyright © 2004-2005 Agilent Technologies, Inc.

Obsoletes 5989-3103EN

August 18, 2005

5989-3735EN



Agilent Technologies