


SWITCHING TYPE POWER SUPPLY APPLICATIONS.

- Repetitive Peak Reverse Voltage : $V_{RRM}=1000V$
- Average Forward Current : $I_F(AV)=0.5A$
- Very Fast Reverse-Recovery Time : $t_{rr}=200ns(Max.)$

MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	RATING	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	1000	V
Average Forward Current ($T_a=25^\circ C$)	$I_F(AV)$	0.5	A
Peak One Cycle Surge Forward Current (Non-Repetitive)	I_{FSM}	15(50Hz) 17(60Hz)	A
Junction Temperature Range	T_j	$-40\sim 150$	$^\circ C$
Storage Temperature Range	T_{stg}	$-40\sim 150$	$^\circ C$

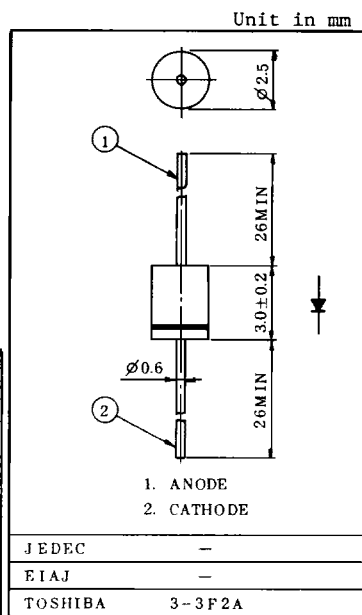

Weight : 0.18g

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage	V_{FM}	$I_F=0.5A$	-	-	1.5	V
Repetitive Peak Reverse Current	I_{RRM}	$V_{RRM}=1000V$	-	-	100	μA
Reverse Recovery Time	t_{rr}	$I_F=1A, di/dt=-30A/\mu s$	-	-	200	ns
Forward Recovery Time	t_{fr}	$I_F=1.0A$	-	-	750	ns
Thermal Resistance	$R_{th(j-a)}$	Junction to Ambient	-	-	150	$^\circ C/W$

Mark

