


Ref. No. 000768

2000/10

SPEC ON WEB SITE
UNDER SEPARATE COVER

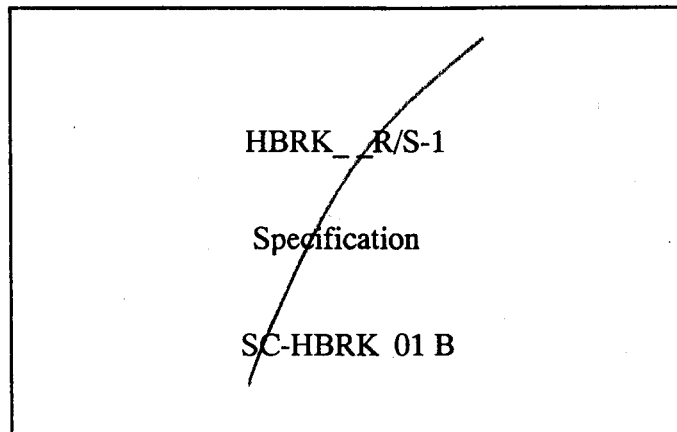

Drawing No.

ISA27511-1

← lead

ISA27510-1

FCI Japan K. K.



Electronics Division Engineering Section

Certified by



H. Takakura

Manager, Engineering Section

TOLERANCES
UNLESS OTHERWISE SPECIFIED : ± 0.2

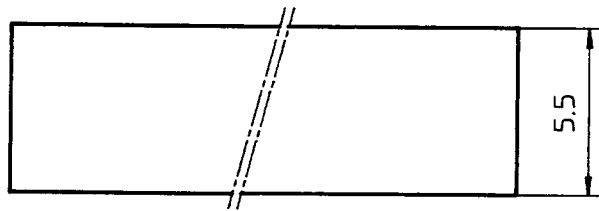

SECTION X-X

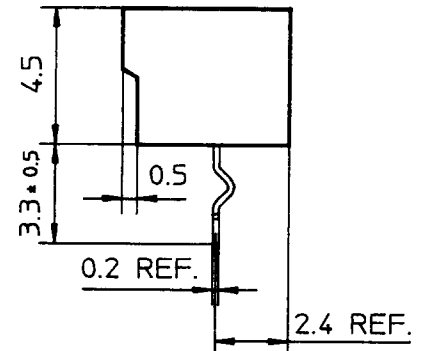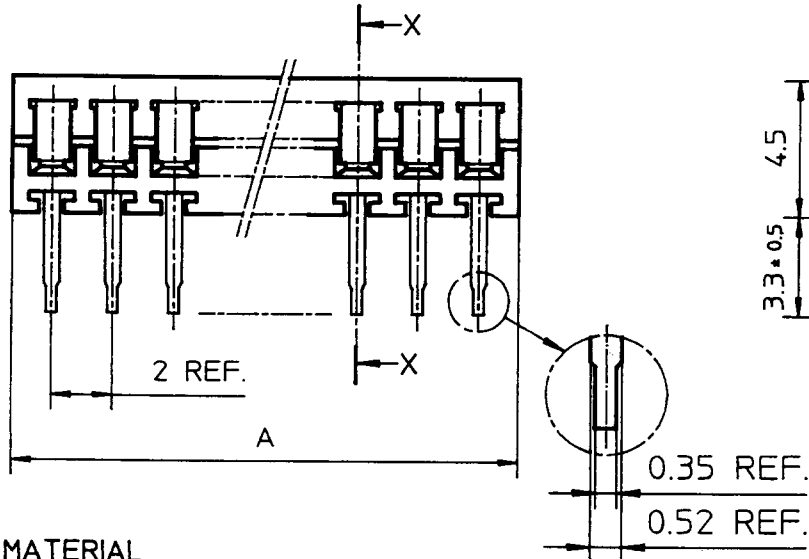


MATERIAL


INSULATOR : PBT RESIN
GLASS REINFORCED (UL94V-0)
COLOR : BLACK
CONTACT : PHOSPHOR BRONZE
(TIN ALLOY PLATED)

RECOMMENDED PC BOARD

THICKNESS : 1.2, 1.6
HOLE PATTERN (COMPONENT SIDE)

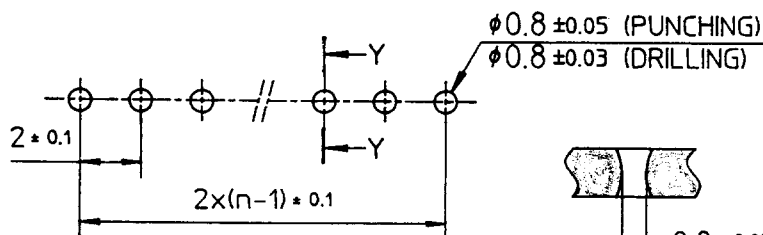



n : NO. OF CONTACTS



SECTION Y-Y

CAT. NO.	DIMENSIONS
	A MAX.
HBRK2R-1	5
HBRK3R-1	7
HBRK4R-1	9
HBRK5R-1	11
HBRK6R-1	13
HBRK7R-1	15
HBRK8R-1	17
HBRK9R-1	19
HBRK10R-1	21
HBRK11R-1	23
HBRK12R-1	25
HBRK13R-1	27
HBRK14R-1	29
HBRK15R-1	31

				SCALE	$\times$	WIREMATE 2mm SPACING (RIGHT ANGLE)	
				DIM. IN	mm	CAT. NO.	
1	JUN. 1, '98	REDRAWN M.1	H.T.	DESIGNED		HBRK__R-1	
REV.	DATE	DESCRIPTION	CKD.	DRAWN	'84-10-22 H.Sunagawa	DRAWING NO.	REV.
MATERIAL				CHECKED	A.NAKAI	JSA 27511	1
				APPROVED	K.Enomoto		
				DATE	Oct. 23, 1984		

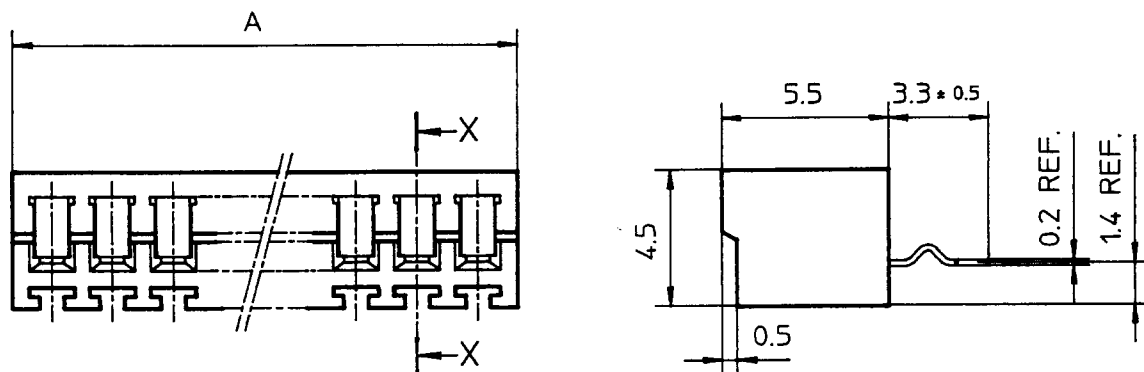
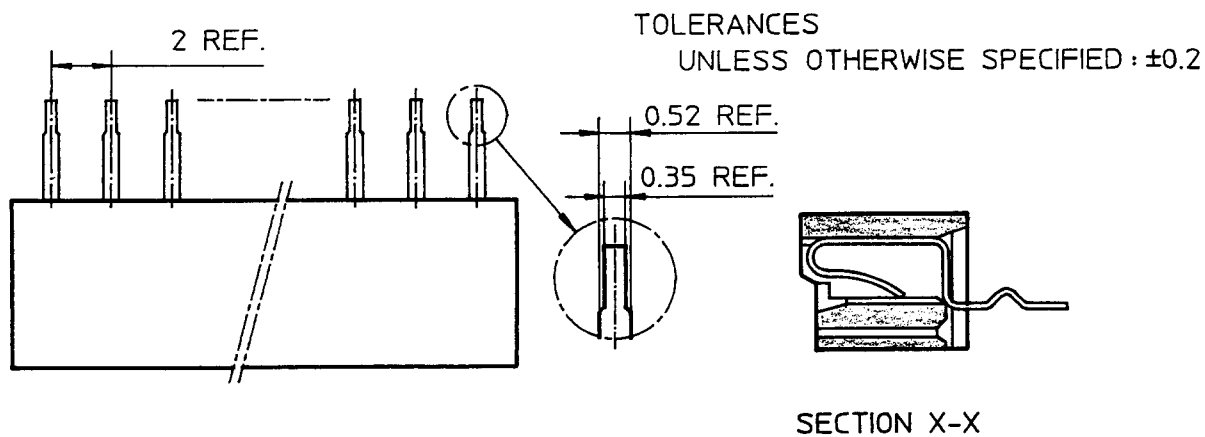


MATERIAL

INSULATOR : PBT RESIN
GLASS REINFORCED (UL94V-0)
COLOR : BLACK
CONTACT : PHOSPHOR BRONZE
(TIN ALLOY PLATED)

RECOMMENDED PC BOARD

THICKNESS : 1.2, 1.6
HOLE PATTERN (COMPONENT SIDE)

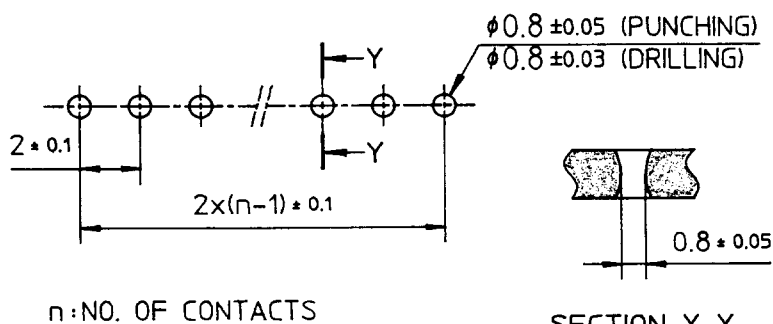

CAT. NO.	DIMENSIONS
	A MAX.
HBRK2S-1	5
HBRK3S-1	7
HBRK4S-1	9
HBRK5S-1	11
HBRK6S-1	13
HBRK7S-1	15
HBRK8S-1	17
HBRK9S-1	19
HBRK10S-1	21
HBRK11S-1	23
HBRK12S-1	25
HBRK13S-1	27
HBRK14S-1	29
HBRK15S-1	31

				SCALE	$\times$	WIREMATE 2mm SPACING (STRAIGHT)	
				DIM. IN	mm	CAT. NO.	
1	JUN. 1, '98	REDRAWN M.I.	H.T.	DESIGNED		HBRK__S-1	
REV.	DATE	DESCRIPTION	CKD.	DRAWN	H.Sunagawa	DRAWING NO.	REV.
MATERIAL				CHECKED	A.NAKAI	JSA 27510	1
				APPROVED	K.Enomoto		
				DATE	OCT 23, 1984		