



75 Ohm SMB Positive Snap Plug Connector Crimp/
Solder Attachment For RG179, RG187

TECHNICAL DATA SHEET

PE44443

75 Ohm SMB Positive Snap Plug Connector Crimp/Solder Attachment For RG179, RG187

Configuration

Connector	SMB Positive Snap Plug
Connector Interface Type	RG179, RG187
Cable Attachment Method (Shield/Contact)	Crimp/Solder
Body Style	Straight

Electrical Specifications

Impedance, Ohms	75
-----------------	----

Mechanical Specifications

Size

Length, in [mm]	1.082 [27.48]
Width/Dia., in [mm]	0.4 [10.16]
Weight, lbs [g]	0.019 [8.62]

Connector

Type	SMB Positive Snap Plug
Contact Material and Plating	Gold
Body Material and Plating	Brass, Nickel
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------

75 Ohm SMB Positive Snap Plug Connector Crimp/Solder Attachment For RG179, RG187 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm SMB Positive Snap Plug Connector Crimp/Solder Attachment For RG179, RG187 PE44443](http://www.pasternack.com/smb-positive-snap-plug-standard-rg179-rg187-connector-pe44443-p.aspx)

URL: <http://www.pasternack.com/smb-positive-snap-plug-standard-rg179-rg187-connector-pe44443-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.




MATERIALS	
BODY CONTACT INSULATOR	BRASS NICKEL PLATED GOLD PLATED PTFE

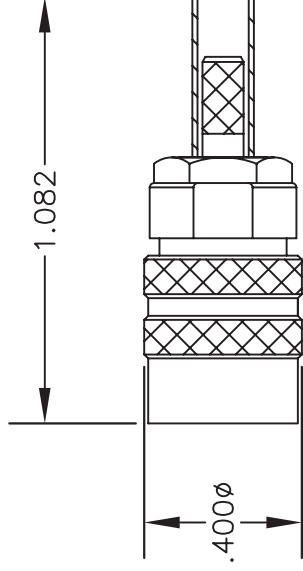

ASSEMBLY PROCEDURES

1. STRIP CABLE AS SHOWN & SLIDE FERRULE (1) ONTO CABLE. TIN CENTER CONDUCTOR.
2. ADD CRIMP NUT (2) BY SLIDING EXTENSION BETWEEN BRAID & DIELECTRIC. SLIDE FERRULE (1) OVER BRAID & CRIMP.
3. SOLDER CONTACT (3) TO CENTER CONDUCTOR. SLIDE ASSEMBLY INTO BODY & TIGHTEN

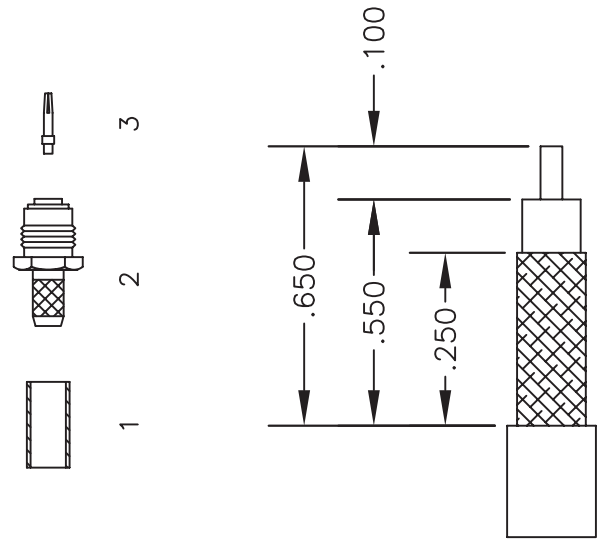

STRIPPING DIMENSIONS

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL



PASTERNAK ENTERPRISES, INC.
 P O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE		DES.	POSITIVE SNAP, CRIMP ATTACHMENT FOR RG179 & RG187	
PE44443				
SIZE A	FSCM NO. 53919	CAD FILE	080504	SCALE N/A
				127

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.