

Product Specifications



F1R-PDMDR-3M5-3GSH

FSJ1RN-50B SureFlex™ Jumper with interface types 7-16 DIN Male and 7-16 DIN Male Right Angle, 3.5 m



CHARACTERISTICS


General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Right angle
Cable Family	FSJ1-50A
Interface, Connector A	7-16 DIN Male
Interface, Connector B	7-16 DIN Male
Length	3.500 m 11.483 ft

Electrical Specifications

3rd Order IMD	-107.00 dBm
DTF, Connector A	-28.00 dB
DTF, Connector B	-28.00 dB

Jumper Assembly Sample Label

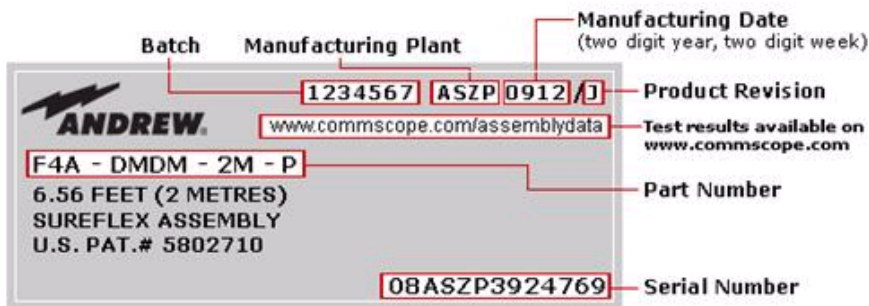

Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
698-960 MHz	1.15	23.00
1700-2200 MHz	1.15	23.00

Regulatory Compliance/Certifications

Agency	Classification
--------	----------------

www.commscope.com/andrew

Product Specifications



F1R-PDMDR-3M5-3GSH

RoHS 2002/95/EC
China RoHS SJ/T 11364-2006
ISO 9001:2008

Compliant by Exemption
Above Maximum Concentration Value (MCV)
Designed, manufactured and/or distributed under this quality management system



INCLUDED PRODUCTS



FSJ1RN-50B

FSJ1-50B, HELIAX® Superflexible Low Density Foam Coaxial Cable, corrugated copper, 1/4 in, gray non-halogenated, fire retardant polyolefin jacket
