


SMD Power Inductors (NR series S type)

NRS5020T1R0NMGJ

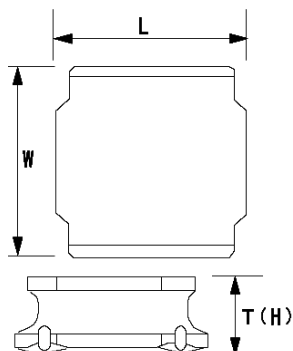

■ Features

- Item Summary
1.0 μ H(\pm 30%), 4000mA, 3600mA
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping 800pcs

■ Products characteristics table


CaseSize (EIA/JIS)	-/5020
Inductance	1.0 μ H(\pm 30%)
Inductance Measuring Frequency	100kHz
Rated Current -Saturation Current	4000mA
Rated Current -Temperature Rise Current	3600mA
DC Resistance (max)	0.0252 Ω
Avg. of DC Resistance	0.021 Ω
Temperature Range	-25 $^{\circ}$ C to 125 $^{\circ}$ C
Self-resonant Frequency (min)	81MHz
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	4.9mm \pm 0.2
W	4.9mm \pm 0.2
H	2mm max

■ Recommended Land Patterns

【推奨ランドパターン】 実装上の注意 ・実装状態を確認の上で使用ください。実装してお買い戻しします。 ・本製品のほんだ付けはフラットはんだ工法で行われます。
【Recommended Land Patterns】 Surface Mounting ・Mounting and soldering conditions should be checked beforehand ・Applicable soldering process to these products is reflow soldering only.



SMD Power Inductors (NR series/NR series H type/S type /V type)			
Type	A	B	C
NRS010			
NRS012			
NRS014			
NRS020	1.5	3.6	4
NRS024			
NRS030			
NR 5040, NRS5040			

unit:mm