




CONNOR-WINFIELD CORPORATION

AURORA, IL. 60505
 PHONE (630) 851-4722
 FAX (630) 851-5040

HIGH FREQUENCY 14 PIN DIP SINEWAVE

SPECIFICATIONS	SX5105-6	SX5205-6
Frequency Range	392.8 MHz or 395.7 MHz	
Frequency Accuracy at 25°C	±25ppm	±50ppm
Frequency Stability (0°C to 70°C)	±25ppm	±50ppm
Operating Temperature	-20°C to +85°C	
Storage Temperature	-54°C to +85°C	
Output @ 25°C	Waveform	SINEWAVE
	Coupling	AC coupled
	Power	+6dBm ±1dBm
	Load	50 Ohms ±5%
Spurious responses @ 25°C	Harmonic @ 2x F_o	-15dBc maximum
	Harmonic \geq 3x F_o	-30dBc maximum
	Non-harmonics	-60dBc maximum
Start Up Time	10mS maximum	
Supply Voltage	+5Vdc ±5%	
Supply Current	50mA Maximum	
Package	All metal, hermetically sealed, welded package	

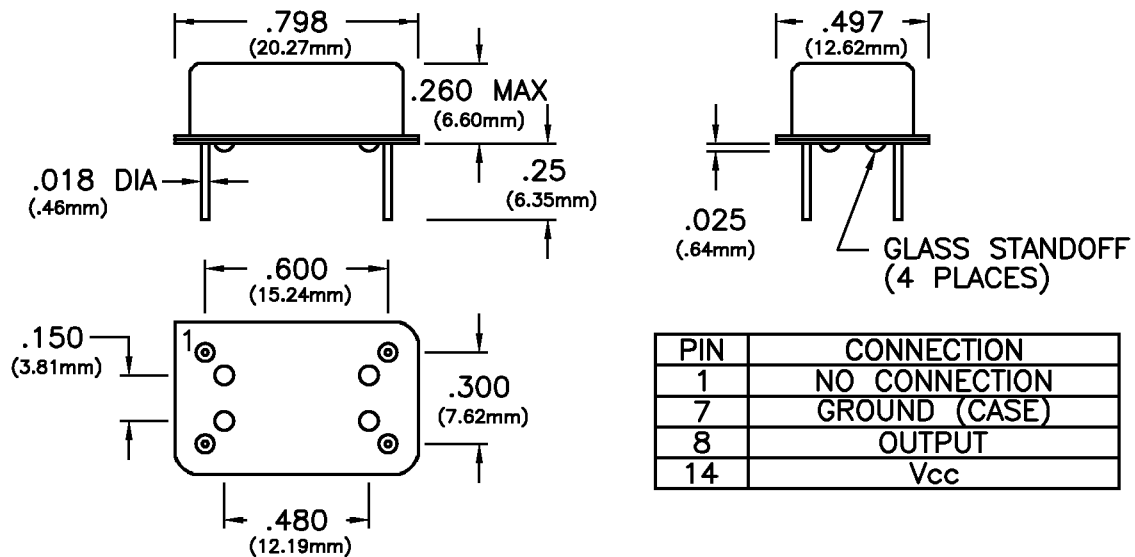

Specifications subject to change without notice

BULLETIN #: SW028
 PAGE 1 OF 1

REV: 03
 DATE: 7/14/98

ISSUED BY: _____

Dimensional Tolerance: ±.02"
 ±.005"