



THIS DRAWING IS THE PROPERTY OF FRAMATOME CONNECTORS OEN LTD.IT MUST NOT BE REPRODUCED DISCLOSED TO ANY THIRD PARTIES OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION IN WRITING FROM M/S FRAMATOME CONNECTORS OEN LTD.KOCHI 682 314.

SINGLE ROW (1 YO)

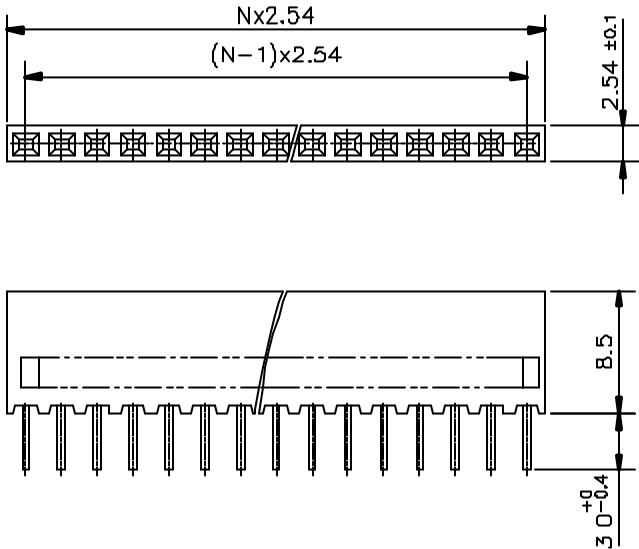


PCB DRILLING DETAILS

DOUBLE ROW (2 YO)

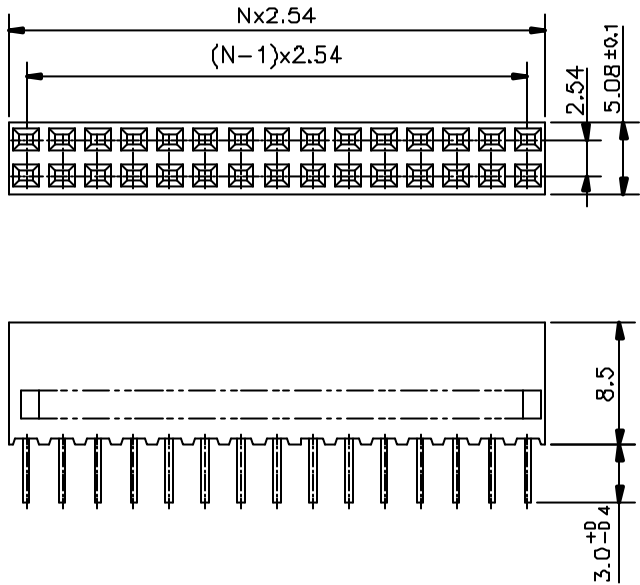

PCB DRILLING DETAILS


ORDERING INFORMATION

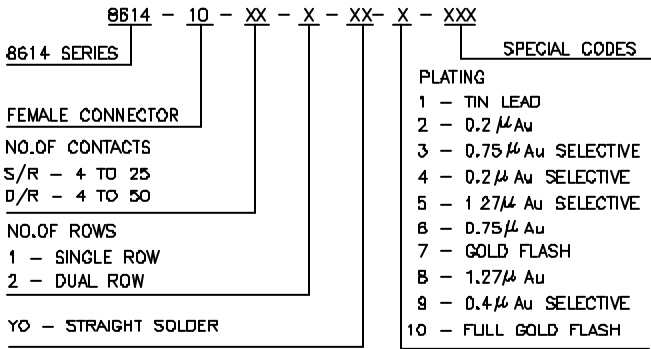

TECHNICAL SPECIFICATION

INSULATOR MATERIAL : SELF EXTINGUISHING THERMOPLASTIC (UL94 VO)  
CONTACT MATERIAL : COPPER ALLOY  
MAXIMUM VOLTAGE : 1000 V rms.  
NOMINAL CURRENT : 3A AT 20°C  
INSULATION RESISTANCE : > 5000 MΩ  
CONTACT RESISTANCE : < 20 mΩ  
CLIMATIC CATAGORY : -55°C TO +125°C / 21 DAYS EXPOSURE TO-  
INDUSTRIAL ENVIRONMENT HUMIDITY TEST AS HE-14.

ALL DIMENSIONS ARE IN MM  
DO NOT SCALE DRAWING  
GEN TOLERANCE  
LINEAR ±0.1  
ANGULAR ±1°

TITLE FEMALE CONNECTOR (STRAIGHT SOLDER)		DRN	Mini.K.V	
		CHD	Jai.K.A	
MATERIAL SEE TECHNICAL SPEC.	REF. 8614	APPD	P.S.Johns	
		DATE	6/12/98	
SCALE		DRG:NO: C/8614/0079		b
		SHEET 1 OF 1		IND

b	19/02/2001	NO.OF CONTACTS WAS 10,15,20,25.		
a	6/12/98	First issue	JKA	PSJ
INDEX	DATE	REVISION DESCRIPTION	CHD BY	APPD

THIS DRAWING WHEN ISSUED THROUGH EDP, IT IS VALID WITHOUT SIGNATURE