

POP-150

15" 4:3 Point Of Promotion Panel PC



Features

- Onboard Intel® Atom™ N270 1.6 GHz Processor
- 15" XVGA Color TFT LCD Display
- Open Frame Design
- Cost-Effective Solution
- Windows® XP, Windows® XP Embedded Support
- Touch Screen Support




Specifications

System	
Processor	Intel® Atom™ N270 1.6 GHz
System Memory	DDR SODIMM x 1, Max. 2 GB
LCD/CRT Controller	Intel® 945GSE
Ethernet	10/100/1000Base -TX, RJ-45 x 2
I/O Port	RS-232 x 1, RS-232/422/485 x 1 USB2.0 x 2 Audio Line out x 1 PS/2 x 1 (Keyboard + Mouse Mini-DIN)
Storage Disk	2.5" Hard Disk Drive Bay/ CompactFlash™ Slot (internal)
Expansion Slot	Mini PCI x 1 (internal)
OS Support	Windows® XP, Windows® XP Pro for Embedded, Windows® 7
Mechanical	
Construction	Open frame
Color	Gray
Mounting	VESA 75/100
Dimension	15" x 11.61" x 2.36" (382mm x 295mm x 60mm)
Gross weight	15.4 lb (7 kg)
Environmental	
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Storage Humidity	10% to 90%@ 40°C, non-condensing
Power Supply	
DC-DC input	Input Range: 9V~30V DC
LCD	
Display Type	15" TFT-LCD
Max. Resolution	1024 x 768
Max. Color	16.7M colors
Dot Size	0.297 x 0.297
Luminance	250 nits (TYP.)
View Angle	150°(H)/140°(V)
Back Light MTBF	30,000
TouchScreen	
Type	5-wire, Analog Resistive
Resolution	2048 x 2048
Light Transmission	80%
Lifetime	35 million activations

POP-150

Dimension

Unit: mm

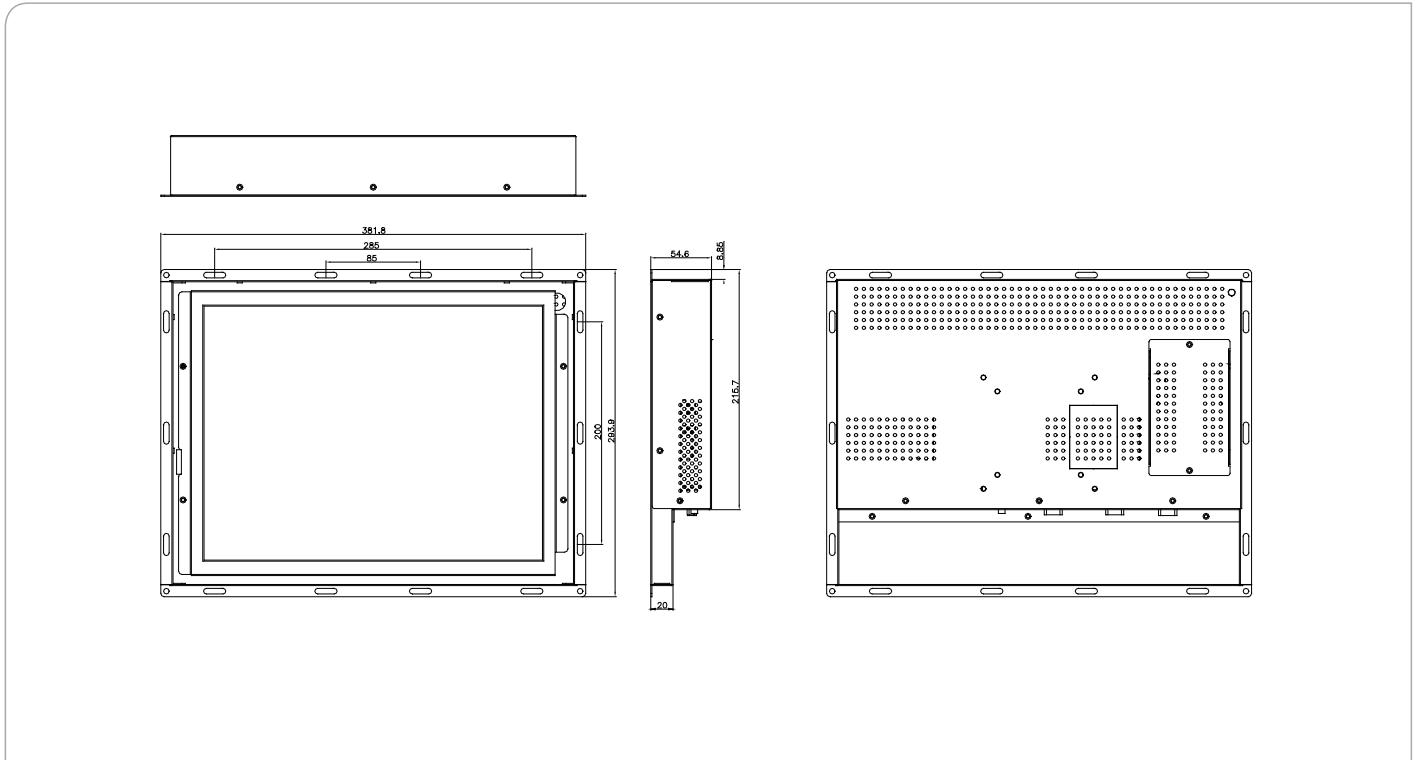

Ordering Information

- **TF-POP-150-HTT-G5-0001-1010**
Intel® Atom™ N270 1.6 GHz, Open Frame Panel PC with 15" LCD, 512 MB RAM, Touch Screen
- **TF-POP-150-HT-G5-0001-1010**
Intel® Atom™ N270 1.6 GHz, Open Frame Panel PC with 15" LCD, 512 MB RAM

Optional Accessories

- **9741850R00**
Wireless LAN Kit, IEEE802.11b/g, with Antenna
- **ARM-WK075-0**
Wallmount Kit with VESA 75/100mm Standards
- **2.5" Hard Disk Drive**
- **1702031830**
Power Cord (US Type)
- **1702031831**
Power Cord (European Type)
- **1702031810**
Power Cord (Japanese Type)
- **1757912001**
AC Adapter (Output DC 19V)