




LATCHING MECHANISM


GROUNDING TAB.
SEE SHEET 3 FOR
LOCATING CONFIGURATION

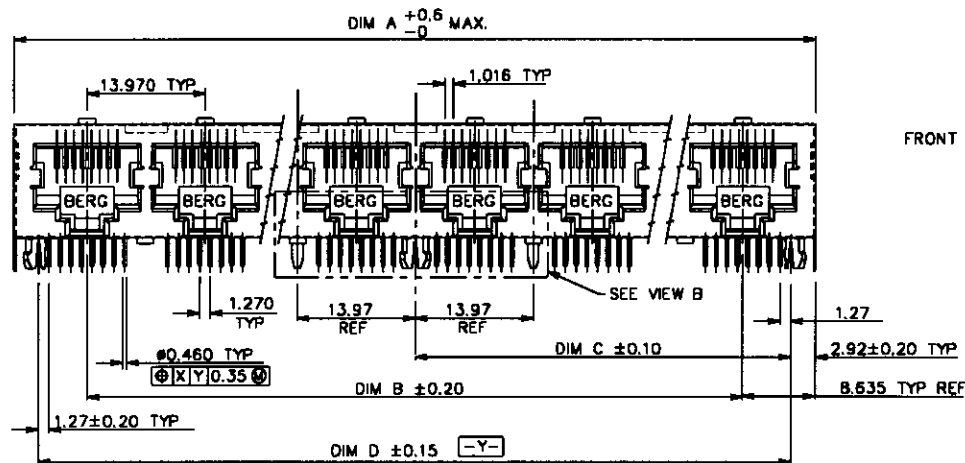

FOR PORT NO. 4,6,8,10,12



FOR PORT NO. 3,5,7,9,11





FOR 2-PORT

VIEW B

FRONT SHIELD

REAR SHIELD

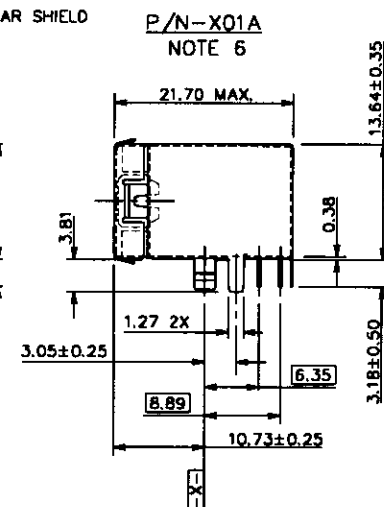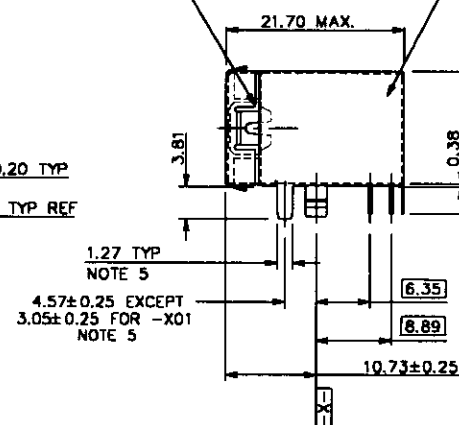

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	BERG ELECTRONICS		
ltr	ecn no	dr	date	linear	angles				
A	V60881	LSS	5/29/96			projection	HIGH TEMP. R/A 8 POS GANG JACK. ASSY SHIELDED, SNAP PEG		
						mm			
				dr	G. HULL	2/14/96	product family MOD JACK		code
				engr	Y. BELOPOLSKY	2/14/96			sheet
				chr	L. GREEN	2/14/96	size dwg no		1 of 4
				oppd	Y. BELOPOLSKY	2/14/96			
sheet	revision	A	A	A	A	scale	A4 72239		
index	sheet	1	2	3	4	1:1			
							cage code		
							22526		

PRODUCT No.	PORTS No	DIM A ± 0.6 -0	DIM B ± 0.20	DIM C ± 0.10	DIM D ± 0.15	GROUND LEG NO. ON THE BACK (VIEW B)	NOTE	SPECIAL REQUIREMENT
72239-X01-V	1	15.74	---	5.715	11.43	NONE	NOTE 5	---
72239-X01A-V	1	15.74	---	5.715	11.43	NONE	NOTE 6	---
72239-X02-V	2	30.98	13.97	12.700	25.40	1	---	NOT AVAILABLE
72239-X03-V	3	44.95	27.94	19.685	39.37	2	---	
72239-X04-V	4	58.92	41.91	26.670	53.34	3	---	
72239-X05-V	5	72.89	55.88	33.655	67.31	2	---	
72239-X06-V	6	86.86	69.85	40.640	81.28	3	---	
72239-X07-V	7	100.83	83.82	47.625	95.25	2	---	
72239-X08-V	8	114.80	97.79	54.610	109.22	3	---	
72239-X09-V	9	128.77	111.76	61.595	123.19	2	---	
72239-X10-V	10	142.74	125.73	68.580	137.16	3	---	
72239-X11-V	11	156.71	139.70	75.565	151.13	2	---	
72239-X12-V	12	170.68	153.67	82.550	165.10	3	---	

PACKAGING CODE V:		
PRODUCT NO.	PACKAGE	PKG. SPEC.
72239-001A-R	TRAY	GES-14-351
72239-001A-U	TUBE	GES-14-361
72239-XYX-R	TRAY	GES-14-351
72239-XYX-U	TUBE	GES-14-361

PLATING CODE X	PLATING
0	30u" G.X.T.
1	15u" GOLD.
3	30u" GOLD.
5	50u" GOLD.

NOTES:


1. RECOMMENDED P.C.B. THICKNESS 1.60 MM.
2. HOUSING MAT'L: ZYTEL HTNFEI5502 NC010 COLOR: BLACK.
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, ϕ 0.460 ROUND WIRE, PLATING SEE TABLE.
4. SHIELDING MAT'L: .025 MM THICK, COPPER ALLOY, 100u" MIN. TIN-LEAD PLATED, OR THE EQUIVALENT.
5. SPECIALLY FOR ONE-PORT P/N 72239-X01 ONLY. SOLDER TAIL OF SHIELD IS 1.02 WIDE, DISTANCE FROM PCB PEG TO THE SOLDER TAIL IS 3.05.
6. SPECIALLY FOR ONE-PORT P/N 72239-X01A ONLY. SOLDER TAIL OF SHIELD IS 1.27 WIDE, DISTANCE FROM PCB PEG TO THE SOLDER TAIL IS 3.05. SEE PAGE 1 SIDE VIEW A FOR DETAILS.
7. ALL DIMENSIONS IN MILLIMETERS.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
ltr	ecn no	dr	date	linear	$.X \pm .3$	projection	title		
A					$.XX \pm .13$		HIGH TEMP.		
				angles	$.XXX \pm .051$		R/A. 8 POS GANG JACK. ASSY SHIELDED, SNAP PEG		
				dr	G. HULL 2/14/96		product family		code
				enr	Y. BELOPOLSKY 2/14/96		MOD JACK		-
				chr	L. GREEN 2/14/96		size dwg no		sheet
				appd	Y. BELOPOLSKY 2/14/96	scale	A4 72239		2 of
sheet index	revision	sheet				1:1			
						cage code		22526	


LATCHING AND GROUNDING TAB LOCATING CONFIGURATION

- INDICATES LATCHING TAB (SEE DETAIL A ON SHEET 1)
- INDICATES GROUNDING TAB ON THE FRONT OF PRODUCT (SEE SHEET 1)
- ▨ INDICATES GROUNDING LEG ON THE BACK OF PRODUCT (VIEW B)

PORT NUMBERS

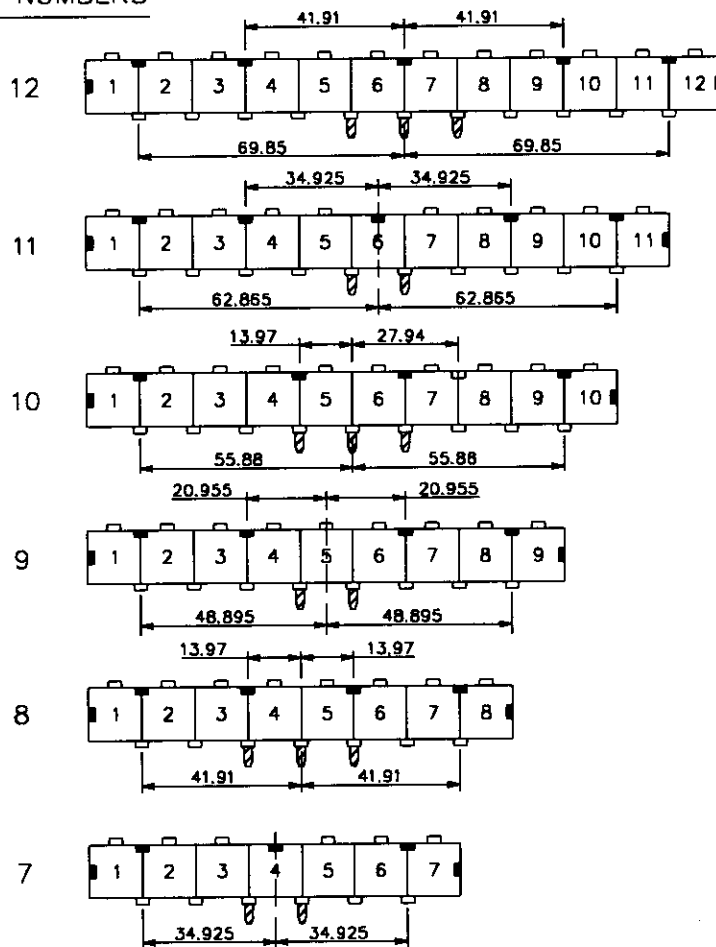

PORT NUMBERS

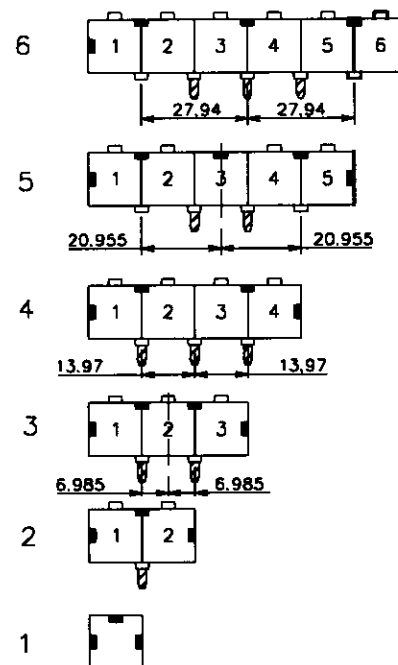

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	BERG ELECTRONICS title HIGH TEMP. R/A 8 POS GANG JACK. ASSY SHIELDED, SNAP PEG		
l/r	ecn no	dr	date	linear	angles				
A				.X ± .3	0° ± 2°	projection		product family	code
				.XX ± .13		mm		MOD JACK	-
				.XXX ± .051		scale	1:1	size dwg no	sheet
				dr G. HULL 2/14/96				A4	4 of
				engr Y. BELOPOLSKY 2/14/96				72239	
				chr L. GREEN 2/14/96					
				app Y. BELOPOLSKY 2/14/96					
sheet index	revision sheet								