

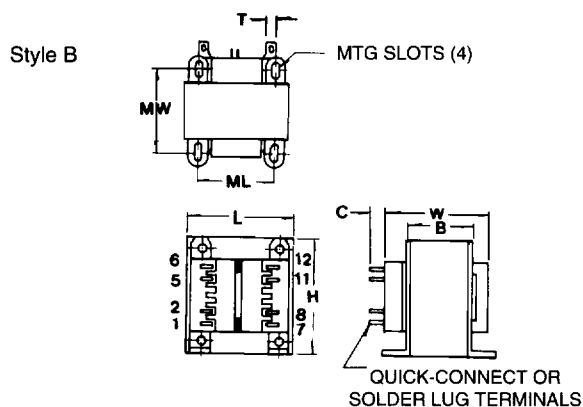
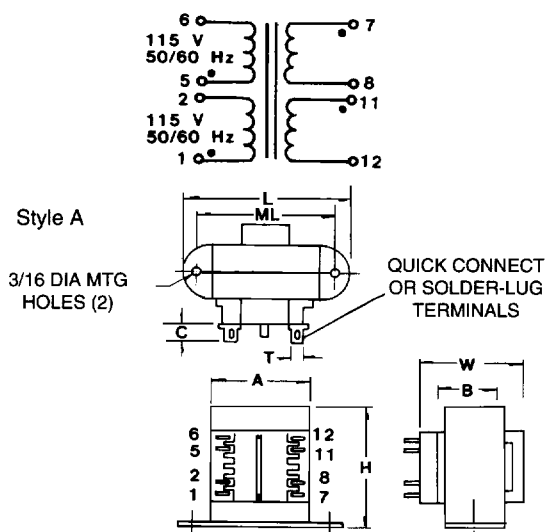
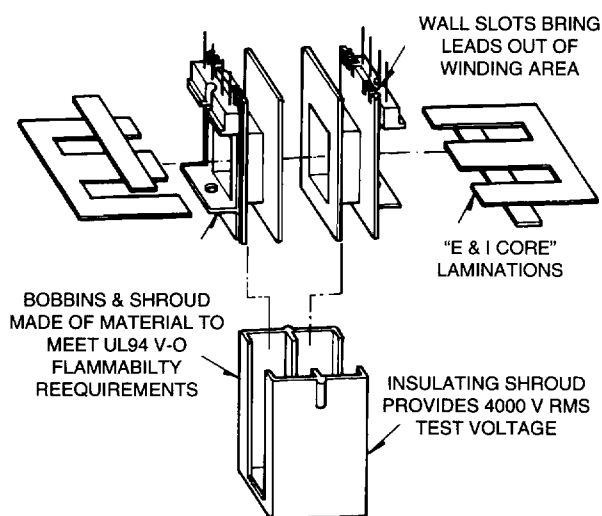


International Chassis Mount, High Wattage, Shrouded Power Transformers



A 41 Series



Part No.	VA Size	Secondary	
		Series	Parallel
A41-25-10	25	10V C.T. @ 2.5A	5V @ 5.0A
A41-43-10	43	10V C.T. @ 4.3A	5V @ 8.6A
A41-80-10	80	10V C.T. @ 8.0A	5V @ 16.0A
A41-130-10	130	10V C.T. @ 13.0A	5V @ 26.0A
A41-175-10	175	10V C.T. @ 17.5A	5V @ 35.0A
A41-25-12	25	12.6V C.T. @ 2.0A	6.3V @ 4.0A
A41-43-12	43	12.6V C.T. @ 3.4A	6.3V @ 6.8A
A41-80-12	80	12.6V C.T. @ 6.3A	6.3V @ 12.6A
A41-130-12	130	12.6V C.T. @ 10.3A	6.3V @ 20.6A
A41-175-12	175	12.6V C.T. @ 14.0A	6.3V @ 28.0A
A41-25-16	25	16V C.T. @ 1.6A	8V @ 3.2A
A41-43-16	43	16V C.T. @ 2.7A	8V @ 5.4A
A41-80-16	80	16V C.T. @ 5.0A	8V @ 10.0A
A41-130-16	130	16V C.T. @ 8.1A	8V @ 16.2A
A41-175-16	175	16V C.T. @ 11.0A	8V @ 22.0A
A41-25-20	25	20V C.T. @ 1.25A	10V @ 2.5A
A41-43-20	43	20V C.T. @ 2.2A	10V @ 4.4A
A41-80-20	80	20V C.T. @ 4.0A	10V @ 8.0A
A41-130-20	130	20V C.T. @ 6.5A	10V @ 13.0A
A41-175-20	175	20V C.T. @ 8.8A	10V @ 17.6A
A41-25-24	25	24V C.T. @ 1A	12V @ 2A
A41-43-24	43	24V C.T. @ 1.8A	12V @ 3.6A
A41-80-24	80	24V C.T. @ 3.3A	12V @ 6.6A
A41-130-24	130	24V C.T. @ 5.4A	12V @ 10.8A
A41-175-24	175	24V C.T. @ 7.3A	12V @ 14.6A
A41-25-28	25	28V C.T. @ 0.9A	14V @ 1.86A
A41-43-28	43	28V C.T. @ 1.5A	14V @ 3.0A
A41-80-28	80	28V C.T. @ 2.8A	14V @ 5.6A
A41-130-28	130	28V C.T. @ 4.6A	14V @ 9.2A
A41-175-28	175	28V C.T. @ 6.25A	14V @ 12.5A
A41-25-36	25	36V C.T. @ 0.7A	18V @ 1.4A
A41-43-36	43	36V C.T. @ 1.2A	18V @ 2.4A
A41-80-36	80	36V C.T. @ 2.2A	18V @ 4.4A
A41-130-36	130	36V C.T. @ 3.6A	18V @ 7.2A
A41-175-36	175	36V C.T. @ 4.8A	18V @ 9.6A
A41-25-230	25	230V C.T. @ 0.11A	115V @ 0.22A
A41-43-230	43	230V C.T. @ 0.19A	115V @ 0.38A
A41-80-230	80	230V C.T. @ 0.35A	115V @ 0.7A
A41-130-230	130	230V C.T. @ 0.57A	115V @ 1.14A
A41-175-230	175	230V C.T. @ 0.76A	115V @ 1.52A

Mechanical Dimensions in Inches

VA	WT.	L	W	H	A	B	C	T	ML	MW	MTG	STYLE
25	1.25	2.812	1.875	2.312	2.000	1.125	.312	.187	2.375	-	#6	A
43	1.6	3.125	2.062	2.687	2.250	1.125	.312	.187	2.812	-	#6	A
80	2.8	2.500	2.375	3.000	-	1.375	.312	.187	2.000	2.18	#6	B
130	4.1	2.812	2.875	3.375	-	1.625	.375	0.25	2.250	2.50	#8	B
175	6.5	3.125	2.875	3.750	-	1.625	.375	0.25	2.500	2.50	#8	B