


RoHS

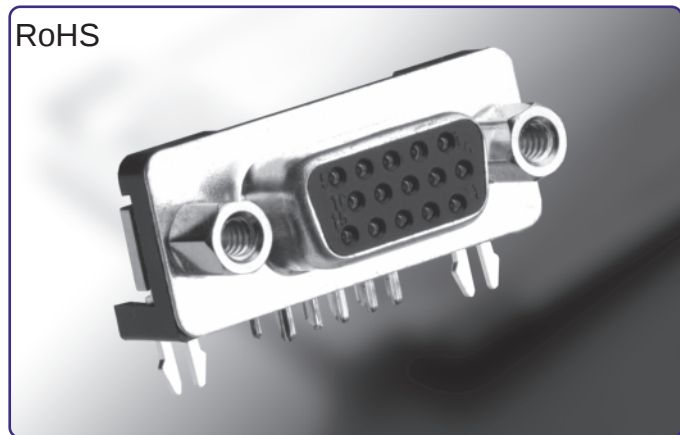

K61X Series High Density Right Angle PCB Mount Compact Footprint


Features

- 15 Pin High Density D-Subminiature Receptacle, Right Angle PCB Termination, Compact Footprint
- Available in Reflow Compatible, High Temperature Plastic

VESA Features

- Contact #9 Recessed 0.050" (1.27mm) to Allow Last Mate/First Break on 5V Supply Voltage
- Blue PBT Insulator Signifies 5V Capability and Full Feature
- AccessBus Capability in Accordance with Video Electronics Standard Association (VESA)
- Meets Display Data Channel (DDC) Standard

K61X Series Dimensions Dimensions in mm

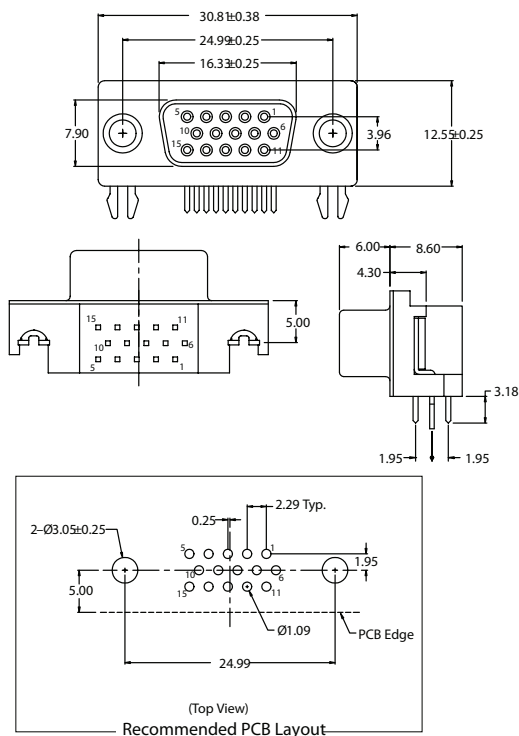

D-SUBMINIATURE CONNECTORS

K61X Series

Documentation & Ordering Information

Kycon Part

Part Number Builder

Series	Shell Size	Contact Type	Mounting Option	Plating Options	VESA Option
--------	------------	--------------	-----------------	-----------------	-------------

Series

K61X - High Density D-Subminiature Connector,
Right Angle PCB Termination

Contact Shell Size

E-15 Contacts

Contact Type

S - Socket Contact (Receptacle)

Mounting Option

N - With Board Locks and 4-40 Riveted Threaded Inserts

NJ - With Board Locks, Riveted Threaded Inserts and 4-40 Hex.
Jack Screws Assembled to Connector

Plating Option

Blank - Gold Flash

15 - 15µ" Gold

30 - 30µ" Gold

VESA Option

Blank - Standard

VESA - VESA Compliant Version (Not available with N15 & NJ30)

Contact Kycon for PC99 Color and other options