

Terminal strips for printed circuit boards

type 8491

12 AWG


spacing 7.62 mm

UL Ratings:


- 12-30 AWG 30A(factory)
- 12-22 AWG 20A (field)
- 300V

CSA Ratings:


- 12-22 AWG 25A
- 300V




clamp direction parallel to PC board




clamp direction vertical to PC board

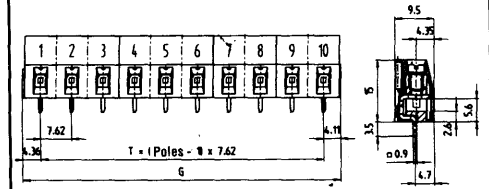


without insulating plate

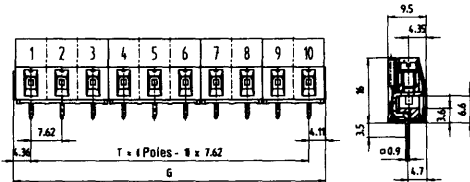

with insulating plate without fixing bolts

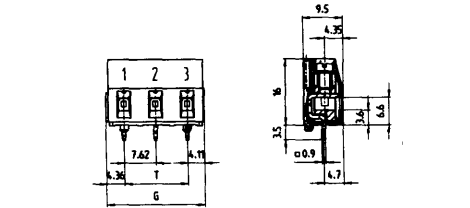


with insulating plate with fixing bolts

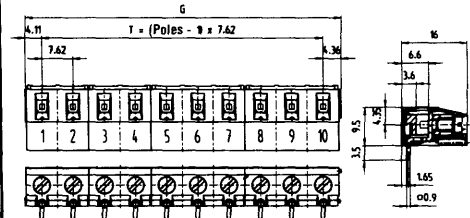


with insulating plate horizontal

bore hole plan for version with fixing bolts

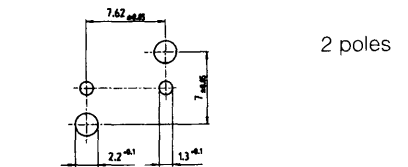

2 poles

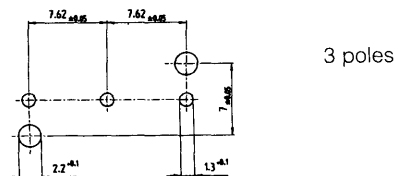

3 poles

See accessories page 171

Wire strip length: 6.5mm

G	T	Poles	part no. marked			
			with insulating plate with fixing bolts	with insulating plate without fixing bolts	without insulating plate	with insulating plate horizontal
16.09	7.62	2	25.176.0253.0	25.166.3253.0	25.166.0253.0	25.166.6253.0
23.71	15.24	3	25.176.0353.0	25.166.3353.0	25.166.0353.0	25.166.6353.0
31.33	22.66	4		25.166.3453.0	25.166.0453.0	25.166.6453.0
38.95	30.48	5		25.166.3553.0	25.166.0553.0	25.166.6553.0
46.57	38.10	6		25.166.3653.0	25.166.0653.0	25.166.6653.0
54.19	45.72	7		25.166.3753.0	25.166.0753.0	25.166.6753.0
61.61	53.34	6		25.166.3853.0	25.166.0853.0	25.166.6853.0
69.43	60.96	9		25.166.3953.0	25.166.0953.0	25.166.6953.0
77.05	66.56	10		25.166.4053.0	25.166.1053.0	25.166.7053.0
64.67	76.20	11		25.166.4153.0	25.166.1153.0	25.166.7153.0
92.29	83.82	12		25.166.4253.0	25.166.1253.0	25.166.7253.0
99.91	91.44	13		25.166.4353.0	25.166.1353.0	25.166.7353.0
107.53	99.06	14		25.166.4453.0	25.166.1453.0	25.166.7453.0
115.15	106.68	15		25.166.4553.0	25.166.1553.0	25.166.7553.0
122.77	114.30	16		25.166.4653.0	25.166.1653.0	25.166.7653.0
131.39	121.92	17		25.166.4753.0	25.166.1753.0	25.166.7753.0
138.01	129.54	18		25.166.4853.0	25.166.1853.0	25.166.7853.0
145.63	137.16	19		25.166.4953.0	25.166.1953.0	25.166.7953.0
153.25	144.78	20		25.166.5053.0	25.166.2053.0	25.166.8053.0
160.67	152.40	21		25.166.5153.0	25.166.2153.0	25.166.8153.0
168.49	160.02	22		25.166.5253.0	25.166.2253.0	25.166.8253.0
176.11	167.64	23		25.166.5353.0	25.166.2353.0	25.166.8353.0
187.73	175.26	24		25.166.5453.0	25.166.2453.0	25.166.8453.0
G	T	Poles	part no. unmarked			
16.09	7.62	2	25.177.0253.0	25.167.3253.0	25.167.0253.0	25.167.6253.0
23.71	15.24	3	25.177.0353.0	25.167.3353.0	25.167.0353.0	25.167.6353.0
31.33	22.66	4		25.167.3453.0	25.167.0453.0	25.167.6453.0
38.95	30.48	5		25.167.3553.0	25.167.0553.0	25.167.6553.0
46.57	38.10	6		25.167.3653.0	25.167.0653.0	25.167.6653.0
54.19	45.72	7		25.167.3753.0	25.167.0753.0	25.167.6753.0
61.61	53.34	6		25.167.3853.0	25.167.0853.0	25.167.6853.0
69.43	60.96	9		25.167.3953.0	25.167.0953.0	25.167.6953.0
77.05	66.56	10		25.167.4053.0	25.167.1053.0	25.167.7053.0
64.67	76.20	11		25.167.4153.0	25.167.1153.0	25.167.7153.0
92.29	83.82	12		25.167.4253.0	25.167.1253.0	25.167.7253.0
99.91	91.44	13		25.167.4353.0	25.167.1353.0	25.167.7353.0
107.53	99.06	14		25.167.4453.0	25.167.1453.0	25.167.7453.0
115.15	106.68	15		25.167.4553.0	25.167.1553.0	25.167.7553.0
122.77	114.30	16		25.167.4653.0	25.167.1653.0	25.167.7653.0
131.39	121.92	17		25.167.4753.0	25.167.1753.0	25.167.7753.0
138.01	129.54	18		25.167.4853.0	25.167.1853.0	25.167.7853.0
145.63	137.16	19		25.167.4953.0	25.167.1953.0	25.167.7953.0
153.25	144.78	20		25.167.5053.0	25.167.2053.0	25.167.8053.0
160.67	152.40	21		25.167.5153.0	25.167.2153.0	25.167.8153.0
168.49	160.02	22		25.167.5253.0	25.167.2253.0	25.167.8253.0
176.11	167.64	23		25.167.5353.0	25.167.2353.0	25.167.8353.0
187.73	175.26	24		25.167.5453.0	25.167.2453.0	25.167.8453.0