




(2,00 mm) .0787"

TMM SERIES

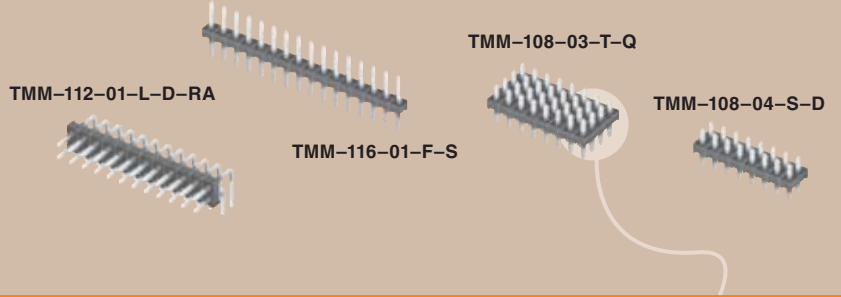

LOW PROFILE THROUGH-HOLE HEADER

SPECIFICATIONS

For complete specifications see www.samtec.com?TMM

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over 50µ" (1,27 µm) Ni

Operating Temp Range:

-55°C to +105°C with Tin;

-55°C to +125°C with Gold

Voltage Rating:

500 VAC mated with SQW

450 VAC mated with SQT

RoHS Compliant: Yes

Lead-Free Solderable: Yes



Mates with:
CLT, SQT, SQW, ESQT,
TLE, SMM, MMS,
TCSD, TLSD




Single, double and quad row

Ultra-low profile (1,50 mm) .059"


Choice of five lead styles

APPLICATION



Retention Clip Option (-RC)

APPLICATIONS




CURRENT RATING (PER CONTACT)	
AMBIENT TEMP	Mated with SMM
20°C	3.9A
40°C	3.5A
60°C	3A
95°C	2A

6 POSITIONS (2x3) POWERED

Note: Some lengths, styles and options are non-standard, non-returnable.

Also Available




Paste In Hole (PIH) processing. Contact Samtec ASP Group for part customization.

TMM	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OTHER OPTION
-----	---	------------------	------------	----------------	------------	--------------

01 thru 50

Specify LEAD STYLE from chart below.

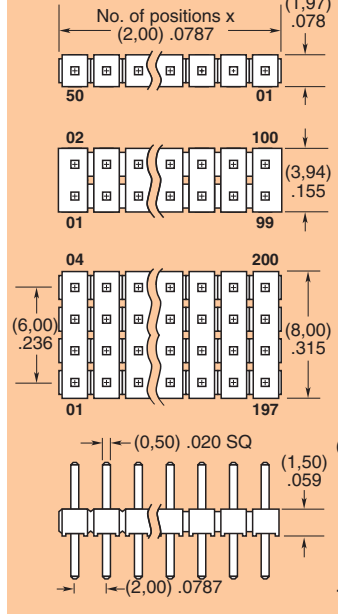

LEAD STYLE	A	B	C
-01	(3,20)	(3,50)	
	.126	.138	
-02	(8,20)	(3,70)	(3,00)
	.323	.146	.118
-03	(4,00)	(2,70)	
	.158	.106	
-04	(5,69)	(1,91)	(2,29)
	.224	.075	
-05	(5,43)	(1,65)	.090
	.214	.065	
-06	(9,58)	(3,20)	(4,88)
	.377	.126	.192

-F
= Gold flash on post, Matte Tin on tail

-L
= 10µ" (0,25 µm) Gold on post, Matte Tin on tail

-S
= 30µ" (0,76 µm) Gold on post, Matte Tin on tail

-T
= Matte Tin

Note: Other Gold plating options available. Contact Samtec.

-S
= Single Row


-D
= Double Row

-Q
= Four Row

-RA & -RE
= Right Angle (Lead Style -01 only) (2 positions minimum, -Q row)

-RC
= Retention Clip (Mates with TCSD) (Double row only, 4 positions minimum, only available -06 lead style)

"XXX"
= Polarized Position (Specify position of omitted pin)



OPTION	D
-RA	(1,27) .050
-RE	(3,56) .140

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM