

RF AMPLIFIER

MODEL *TM3018*

Available as: TM3018, 4 Pin TO-8 (T4)
 TN3018, 4 Pin Surface Mount (SM3)
 FP3018, 4 Pin Flatpack (FP4)
 BX3018, Connectorized Housing (H1)

Features

- Medium Gain: 12.5 dB Typical
- High Output Power: +21.5 dBm Typical
- Operating Temp. 0 °C to +71 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = 0 °C to +71 °C
Frequency	2000 - 2500 MHz	2000 - 2500 MHz
Gain (dB)	12.5	11 Min.
Power @ 1 dB Comp. (dBm)	+21.5	+20 Min.
Reverse Isolation (dB)	-20	-18 Max.
VSWR In	1.5:1	2.0:1 Max.
Out	1.5:1	2.0:1 Max.
Noise Figure (dB)	2.5	3.5 Max.
Power Vdc	+15	+15
mA	105	110 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point.....+62 dBm (Typ.)
 Second Order Two Tone Intercept Point.....+59 dBm (Typ.)
 Third Order Two Tone Intercept Point.....+33 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to +100 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +125 °C
 DC Voltage +18 Volts
 Continuous RF Input Power +13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 μsec Max.)

Typical Performance Data

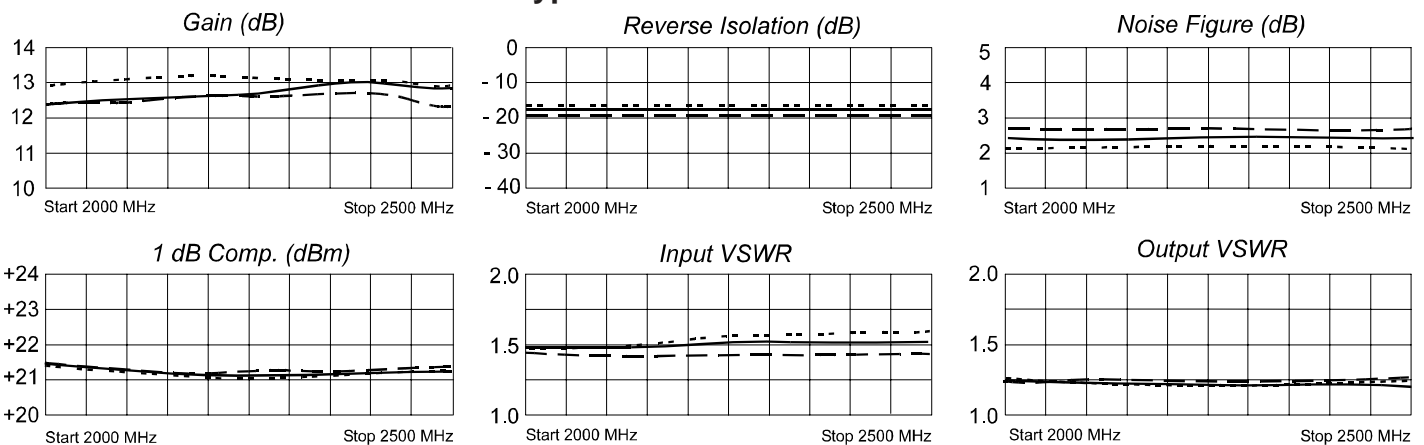

Legend ——— +25 °C - - - +71 °C ······ 0 °C

Linear S-Parameters

Freq. MHz	---S11---		---S21---		---S12---		---S22---	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
2000	0.19	85	4.27	-102	0.10	162	0.12	148
2050	0.19	77	4.29	-110	0.10	158	0.12	134
2100	0.20	69	4.34	-118	0.11	151	0.11	122
2150	0.20	61	4.38	-126	0.10	144	0.11	110
2200	0.20	55	4.37	-134	0.10	138	0.11	100
2250	0.20	47	4.38	-142	0.10	134	0.10	86
2300	0.20	41	4.41	-150	0.10	129	0.10	73
2350	0.20	33	4.50	-159	0.10	122	0.10	61
2400	0.20	25	4.54	-168	0.10	116	0.10	48
2450	0.20	17	4.46	-178	0.10	110	0.11	33
2500	0.20	8	4.40	174	0.10	106	0.11	17



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

Rev.
9/18/08

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001