



HIGH-SPEED SWITCHING APPLICATIONS (Small Signal Transistors)

Features

- *High switching speed
- *High breakdown voltage
- *Low collector saturation voltage
- *Very small-sized package permitting a set to be made smaller

SANYO:SMCP

Case Outlines (unit:mm)

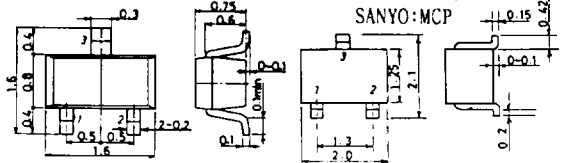


*:Mounted on ceramic board (250mm²X0.8mm).

for PNP, (-) sign is omitted.

☆:Tc=25°C.

1:Base, 2:Emitter, 3:Collector

SANYO:CP
1:B, 2:E, 3:C




SANYO:PCP
1:B, 2:C, 3:E

SANYO:SPA
1:E, 2:C, 3:B

SANYO:NP
1:E, 2:B, 3:C

JEDEC TO-92
EIAJ SC-43

SANYO:TP
1:B, 2:C, 3:E, 4:C



Type No. (): Marking.	Package	Absolute Maximum Ratings/Ta=25°C				Electrical Characteristics/Ta=25°C									
		V _{CBO} (V)	V _{CEO} (V)	I _C (A)	P _C (W)	V _{CE} (V)	I _C (mA)	h _{FE}	I _C (mA)	I _B (mA)	V _{CE(sat)} (V)	t _{on}	t _{stg} typ (ns)	t _f *t _{off}	
2SA1883(HA) 2SC4987(B4-6)	SMCP	15 40	15 15	0.2 0.2	0.15 0.15	1 1	10 10	50 ~ 140 50 ~ 200	10 10	1 1	0.07 0.13	11 8	21 6	*19 *12	
2SA1763(FS) 2SC4452(ST)	M C P	15 40	15 15	0.2 0.2	0.15 0.15	1 1	10 10	50 ~ 140 50 ~ 200	10 10	1 1	0.07 0.13	11 8	21 6	*19 *12	
2SA1685(YL) 2SC4443(GT)		40 20	20 15	0.15 0.15	0.15 0.15	1 1	10 10	60 ~ 180 60 ~ 270	10 10	1 1	0.07 0.08	tr11 10	80 70	16 15	
2SA1764(FS) 2SC4453(ST)	C P	15 40	15 15	0.2 0.2	0.2 0.2	1 1	10 10	50 ~ 140 50 ~ 200	10 10	1 1	0.07 0.13	11 8	21 6	*19 *12	
2SA1607(YL) 2SC4168(GT)		40 20	20 15	0.15 0.15	0.2 0.2	1 1	10 10	60 ~ 180 60 ~ 270	10 10	1 1	0.07 0.08	tr11 10	80 70	16 15	
2SA1728(DS) 2SC4519(TT)	C P	50 60	40 45	0.5 0.5	0.2 0.2	2 2	50 50	70 ~ 280 100 ~ 400	200 200	10 10	0.2 0.15	60 60	120 150	*170 *200	
2SA1331(O-) 2SC3361(S-)		60 50	50 40	0.15 0.15	0.15 0.15	6 6	1 1	90 ~ 400	10 10	1 1	0.1 0.1	tr120 80	190 230	200 160	
2SA1338(AL) 2SC3392(AY)		60 50	50 40	0.5 0.5	0.2 0.2	5 5	10 10	100 ~ 560	100 100	10 10	0.15 0.1	70 70	400 400	50 70	
2SA1898(AN) 2SC5188(CX)	P C P	15 25	15 20	3 3	*1.3 *1.3	2 2	500 100	100 ~ 280 100 ~ 400	1500 800	75 40	0.25 0.22	30 50	100 150	15 120	
2SA1935(AO) 2SC5187(CV)		15 25	15 20	1.5 1.5	*1.3 *1.3	2 2	100 100	100 ~ 280 100 ~ 400	800 800	40 40	0.22 0.22	30 50	100 150	120 180	
2SA1936(AP) 2SC5189(CW)		15 25	15 20	5 5	*1.3 *1.3	2 2	500 100	100 ~ 280 100 ~ 400	2500 800	125 40	0.2 0.3	30 50	100 150	120 *150	
2SA1729(AG) 2SC4520(CK)		50 60	40 45	1.5 1.5	*1.3 *1.3	2 2	100 100	70 ~ 280 100 ~ 400	800 800	40 40	0.3 0.25	50 50	120 150	*150 *180	
2SA1730(AH) 2SC4521(CL)	SPA	50 60	40 45	3 3	*1.5 *1.5	2 2	500 500	70 ~ 280 100 ~ 400	1500 1500	75 75	0.3 0.25	50 50	120 150	*150 *180	
2SA1765 2SC4454		15 40	15 15	0.2 0.2	0.3 0.3	1 1	10 10	50 ~ 140 50 ~ 200	10 10	1 1	0.07 0.13	11 8	21 6	*19 *12	
2SA1339 2SC3393		60 50	50 40	0.5 0.5	0.3 0.3	5 5	10 10	100 ~ 560	100 100	10 10	0.15 0.1	70 70	400 400	50 70	
2SA1481 2SC2960		60 50	50 40	0.15 0.15	0.25 0.25	6 6	1 1	100 ~ 560	10 10	1 1	0.1 0.1	tr120 80	190 230	240 160	
2SC4455	NP(B.C)	40	15	0.2	0.6	1	10	50 ~ 200	10	1	0.13	8	6	*12	
2SA1731 2SC4522	T P	50 60	40 45	5 5	☆15 ☆15	2 2	500 500	70 ~ 280 100 ~ 400	2500 2500	125 125	0.3 0.25	50 50	120 150	*150 *180	
2SA1732 2SC4523		50 60	40 45	8 8	☆15 ☆15	2 2	500 500	70 ~ 280 100 ~ 400	4000 4000	200 200	0.3 0.25	50 50	120 150	*150 *180	

These specifications are subject to change without notice.