


# COMMON MODE FILTERS

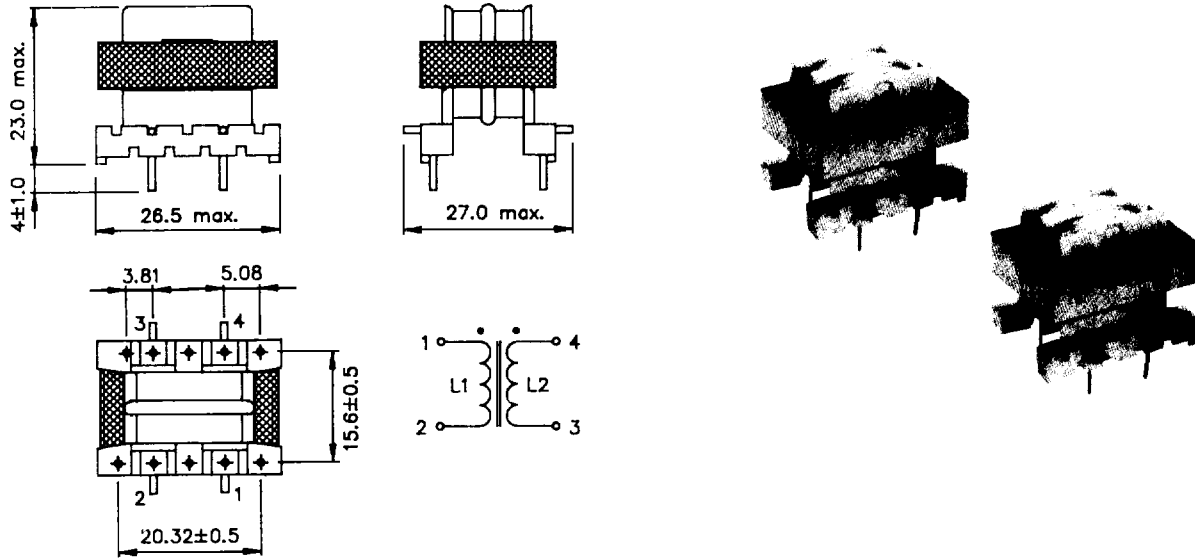

Part No.	Ind. (mH) min.	/L1-L2/ (μH) max.	Rdc (ohm) max.	Rated current (A) rms
CFH2501-01	2X3.6	50	0.2	2.0
CFH2501-02	2X22	500	0.6	1.2
CFH2501-03	2X9	100	0.3	1.9
CFH2501-04	2X40	500	1.5	0.8
CFH2501-05	2X9.9	100	1.0	1.2

unspecified values available on request.

1. Insulation Resistance: 100M (Ohm) at 500 (Vdc)
2. Rated Voltage: 100 to 270 V/50-60 Hz
3. Temperature Rise: 40 °C
4. Withstanding Voltage: 1.5Kvac/1 minute
5. Test Condition: 1KHz/1V
6. Operating Temp.: -20 °C to +105 °C