




CMDL301

WCS Delay Filter


Revision 1, 9/20/2002

Passband:	2300 – 2360 MHz
Insertion Loss:	0.25 dB max.
Delay:	3.8 nS +/- 0.2 nS
Return Loss:	25 dB min.
Power:	50 Watts Average, 1250 Watts PIP
Connectors:	SMA Male
Outline Dimensions:	Per Outline CMDL301 Rev.
Operation Temp:	10° to +70°C
Storage Temp:	-40° to +85°C

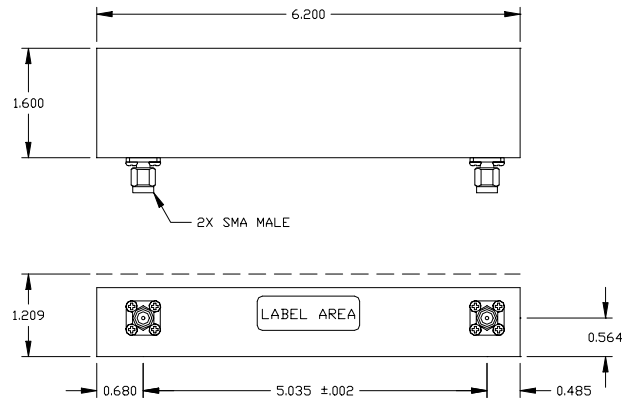

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MARKING: LABEL
- 2. FINISH: TBD
COLOR NO: TBD
- 3. CONNECTOR THREADS AND MOUNTING HOLES ARE PAINT FREE.

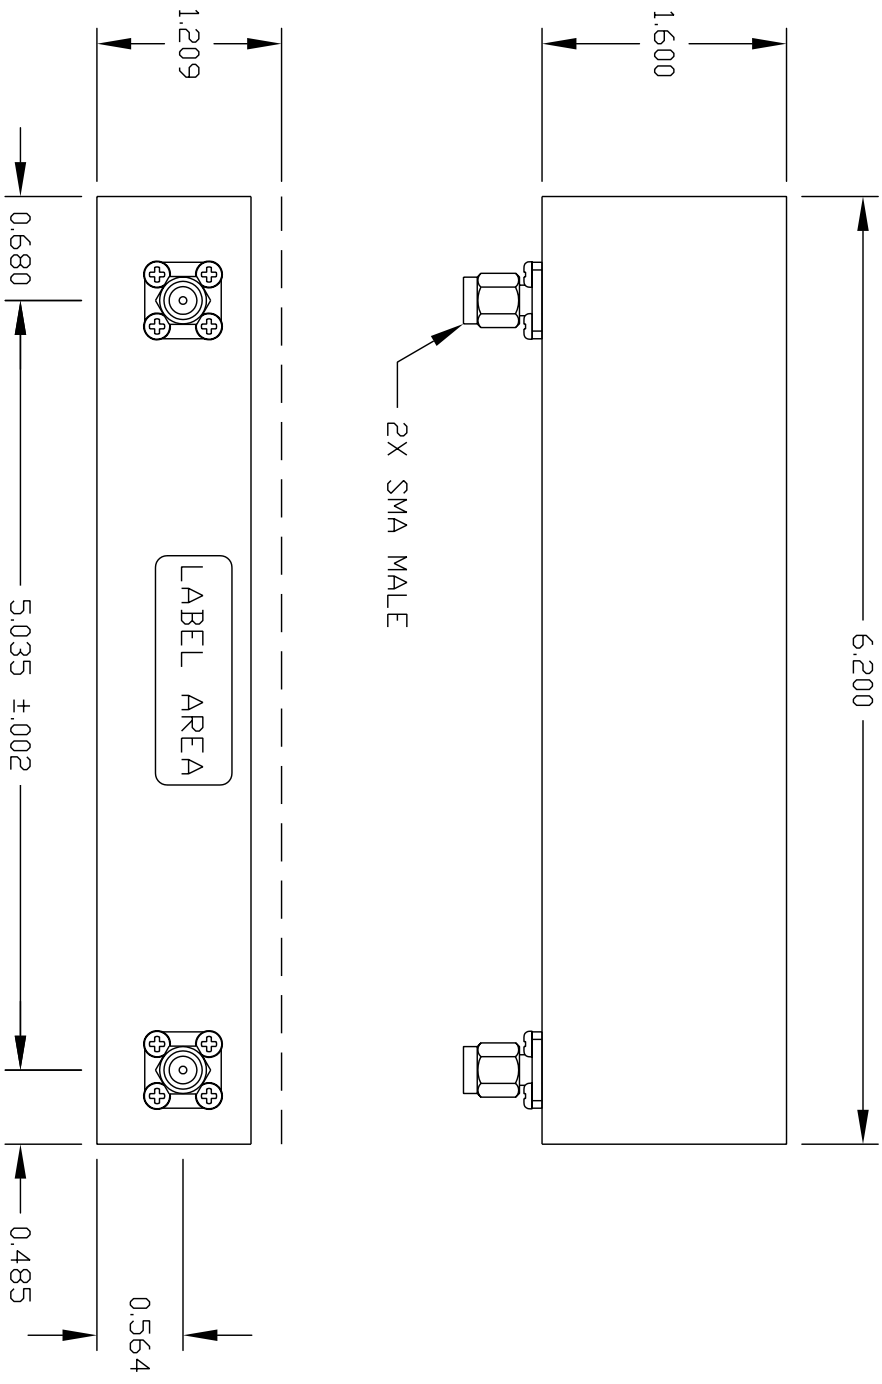

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY PROPERTY OF COMMERCIAL MICROWAVE TECHNOLOGY. THIS DOCUMENT IS RECEIVED IN CONFIDENCE AND ITS CONTENTS MAY NOT BE DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF COMMERCIAL MICROWAVE TECHNOLOGY

COMMERCIAL MICROWAVE TECHNOLOGY, INC.

DRAWN:	MJS	07/10/2002
ENG:		
RELEASED:		

TOLERANCES:
 .XX: ± .01
 .XXX: ± .005
 .XXXX: ± .0005
 ANGLES: ± 1°

SIZE	DWG NO.	REV
A	OUTLINE CMDL301	1
CAGE:	1SCX4	SHEET 1 OF 1