
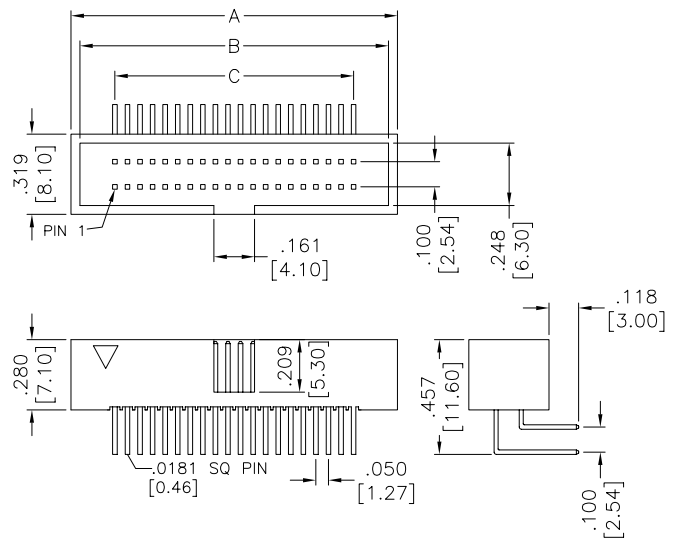


Major League Electronics .050" cl x .100" cl Shrouded Header

PINS PER ROW	A	B	C
5	0.549 [13.95]	0.455 [11.55]	0.200 [5.08]
7	0.649 [16.49]	0.555 [14.10]	0.300 [7.62]
8	0.699 [17.76]	0.605 [15.36]	0.350 [8.89]
10	0.799 [20.30]	0.705 [17.90]	0.450 [11.43]
13	0.949 [24.11]	0.855 [21.71]	0.600 [15.24]
15	1.049 [26.65]	0.955 [24.25]	0.700 [17.78]
17	1.149 [29.19]	1.055 [26.79]	0.800 [20.32]
20	1.299 [33.00]	1.205 [30.60]	0.950 [24.13]
25	1.549 [39.35]	1.455 [36.95]	1.200 [30.48]
30	1.799 [45.70]	1.705 [43.30]	1.450 [36.83]
34	1.999 [50.78]	1.905 [48.38]	1.650 [41.91]
35	2.049 [52.05]	1.955 [49.65]	1.700 [43.18]
40	2.299 [58.40]	2.205 [56.00]	1.950 [49.53]
45	2.549 [64.75]	2.455 [62.35]	2.200 [55.88]
50	2.799 [71.10]	2.705 [68.70]	2.450 [62.23]



Tails may be clipped to achieve desired pin length

Ordering Information

SHTSR-6 - D - 02 - - - LF

Pins Per Row
Only available in:
05, 07, 08, 10, 13, 15, 17, 20, 25,
30, 34, 35, 40, 45, 50

Double


Style
02 = Tail Length .118 (3.0mm)

Lead Free

Polarized Position
010 - 100
Leave blank if not needed

Plating Options	
- 10µ Gold on Contact area/Flash on Tail	GT
- 3µ Selective Gold	FT
- Matte Tin all Over	T
- Gold Flash Over Entire Pin	F

Standard = FT

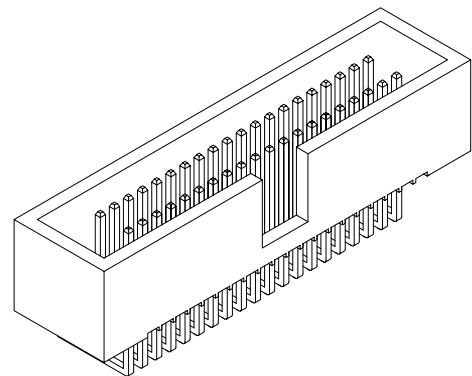

Mates with:
IDS-6

Insulator	PBT, glass reinforced, rated UL 94V-0	Current Rating	1 Amp
Contact	Phosphor Bronze	Dielectric Withstanding	250V AC for one minute
Insulation Resistance	1000 MOHMS min.	Operating Temperature	-40°C to +105°C
Contact Resistance	30 mOHMSmax.		

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

SHTSR-6 SERIES

.050" cl x .100" cl Shrouded Header
Right Angle

23 APR 07

Scale
NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
TWO PLACE DECIMALS ±.010
THREE PLACE DECIMALS ±.005
FOUR PLACE DECIMALS ±.002



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244

Fax: 812-944-7268

E-mail: mle@mlelectronics.com

Web: www.mlelectronics.com


Revision
B

Sheet
1/2

Revisions

Revision B - (1st May 2008)

Amendment to all dimensions in Column B - Pins Per Row Table

SHTSR-6 SERIES		.050" cl x .100" cl Shrouded Header Right Angle		23 APR 07		Scale NTS	
UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES (MM) TOLERANCES ARE:				4235 Earnings Way, New Albany, Indiana, 47150, USA 1-800-782-3486 (USA/Canada/Mexico) Tel: 812-944-7244 Fax: 812-944-7268 E-mail: mle@mlelectronics.com Web: www.mlelectronics.com		Revision B	
ONE PLACE DECIMALS ±.100 TWO PLACE DECIMALS ±.010 THREE PLACE DECIMALS ±.005 FOUR PLACE DECIMALS ±.002						Sheet 2/2	