

DB201 THRU DB207

List

List..... 1

Package outline..... 2

Features..... 2

Mechanical data..... 2

Maximum ratings 2

Rating and characteristic curves..... 3

Pinning information..... 4

Marking..... 4

Tube packing..... 4

Suggested thermal profiles for soldering processes..... 5

High reliability test capabilities..... 6

深圳FMS Kinter 131 6803 0058

DB201 THRU DB207

2.0A Glass Passivated Single-Phase Bridge Rectifiers-50-1000V


Features

- Surge overload ratings to 60 amperes peak.
- Recommended for non-automatic applications.
- Ideal for & save space on printed circuit board.
- Applicable for automatic insertion.
- Reliable low cost construction utilizing molded plastic technology results in inexpensive product.
- Glass passivated chip junctions.
- Lead-free parts meet RoHS requirements.
- UL recognized file # E321971
- Suffix "-H" indicates Halogen-free part, ex.DB201-H

Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, DB
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : marked on body
- Mounting Position : Any
- Weight : Approximated 0.38gram

Package outline

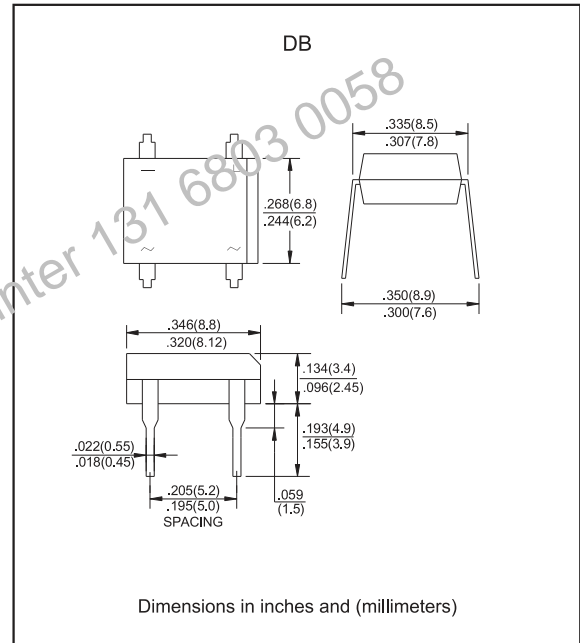






Maximum ratings and Electrical Characteristics (AT T_A=25°C unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.1	I _O			2.0	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC methode)	I _{FSM}			60	A
Reverse current	V _R = V _{RRM} T _J = 25°C	I _R			10	uA
	V _R = V _{RRM} T _J = 125°C				500	
I ² t Rating for fusing	t<8.3ms	I ² t			15	A ² s
Typical Junction Capacitance Per Element	Measured at 1.0MHz and applied reverse voltage of 4.0V DC.	C _J		25		pF
Typical thermal resistance	Junction to ambient mounted on P.C.B with 0.5*0.5"(13*13mm) copper pads.	R _{θJA}		40		°C/W
Storage temperature		T _{STG}	-65		+175	°C

SYMBOLS	V _{RRM} ^{*1} (V)	V _{RMS} ^{*2} (V)	V _R ^{*3} (V)	V _F ^{*4} (V)	Operating temperature T _J , (°C)
DB201	50	35	50	1.10	-55 to +150
DB202	100	70	100		
DB203	200	140	200		
DB204	400	280	400		
DB205	600	420	600		
DB206	800	560	800		
DB207	1000	700	1000		



- *1 Repetitive peak reverse voltage
- *2 RMS voltage
- *3 Continuous reverse voltage
- *4 Maximum forward voltage@I_F=2.0A

Rating and characteristic curves (DB201 THRU DB207)

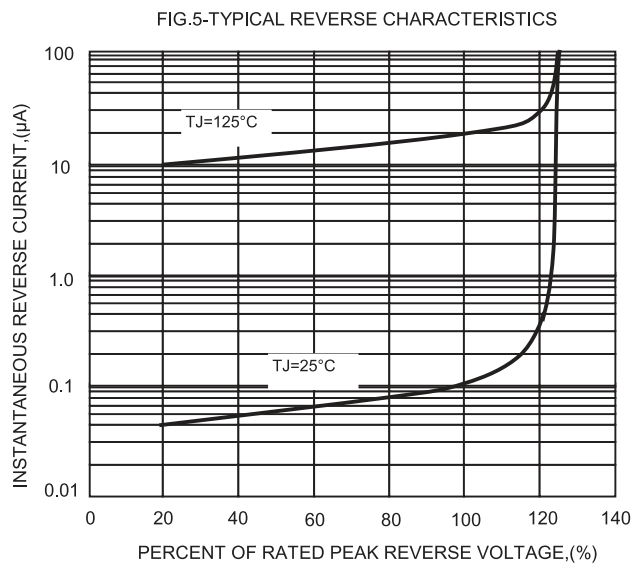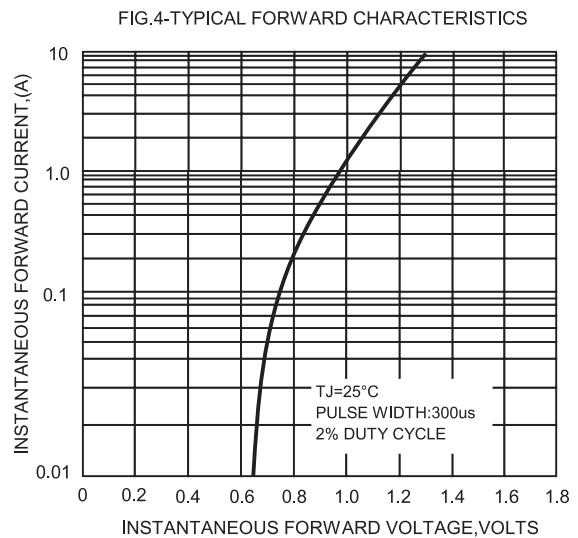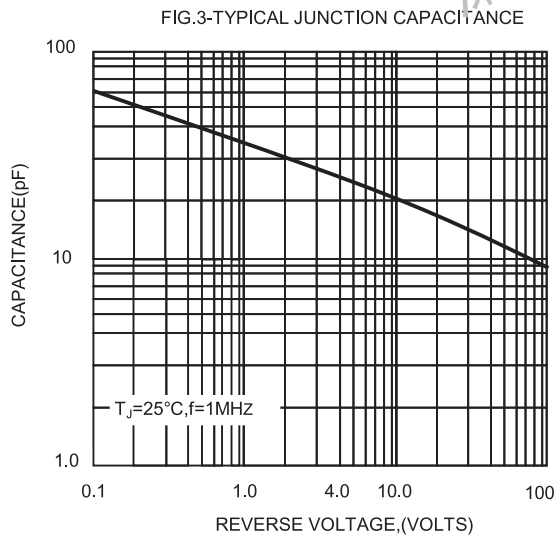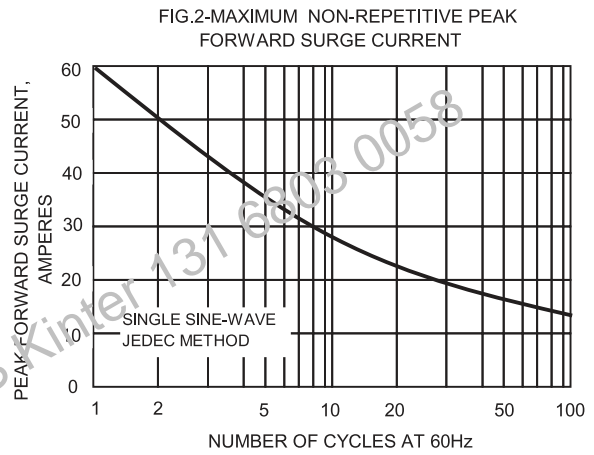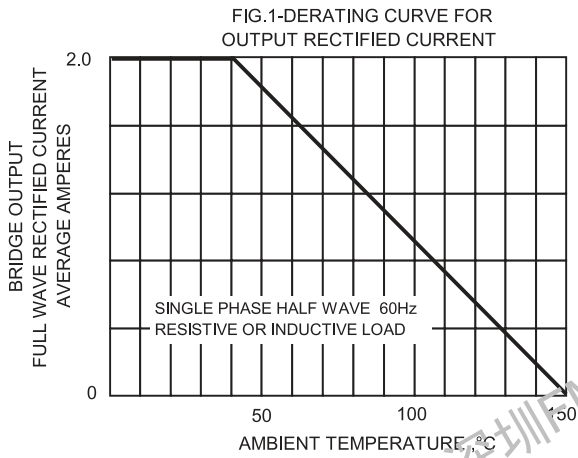

DB201 THRU DB207

Pinning information

Simplified outline	Symbol
	

Marking

Type number	Marking code
DB201	DB201
DB202	DB202
DB203	DB203
DB204	DB204
DB205	DB205
DB206	DB206
DB207	DB207


Tube packing

PACKAGE	TUBE (pcs)	TUBE SIZE (m/m)	BOX (pcs)	INNER BOX (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
DB	50	440*13.4*11.4	2500	450*145*73	470*240*310	15,000	13.0

DB201 THRU DB207

Suggested thermal profiles for soldering processes

1. Lead free temperature profile wave soldering

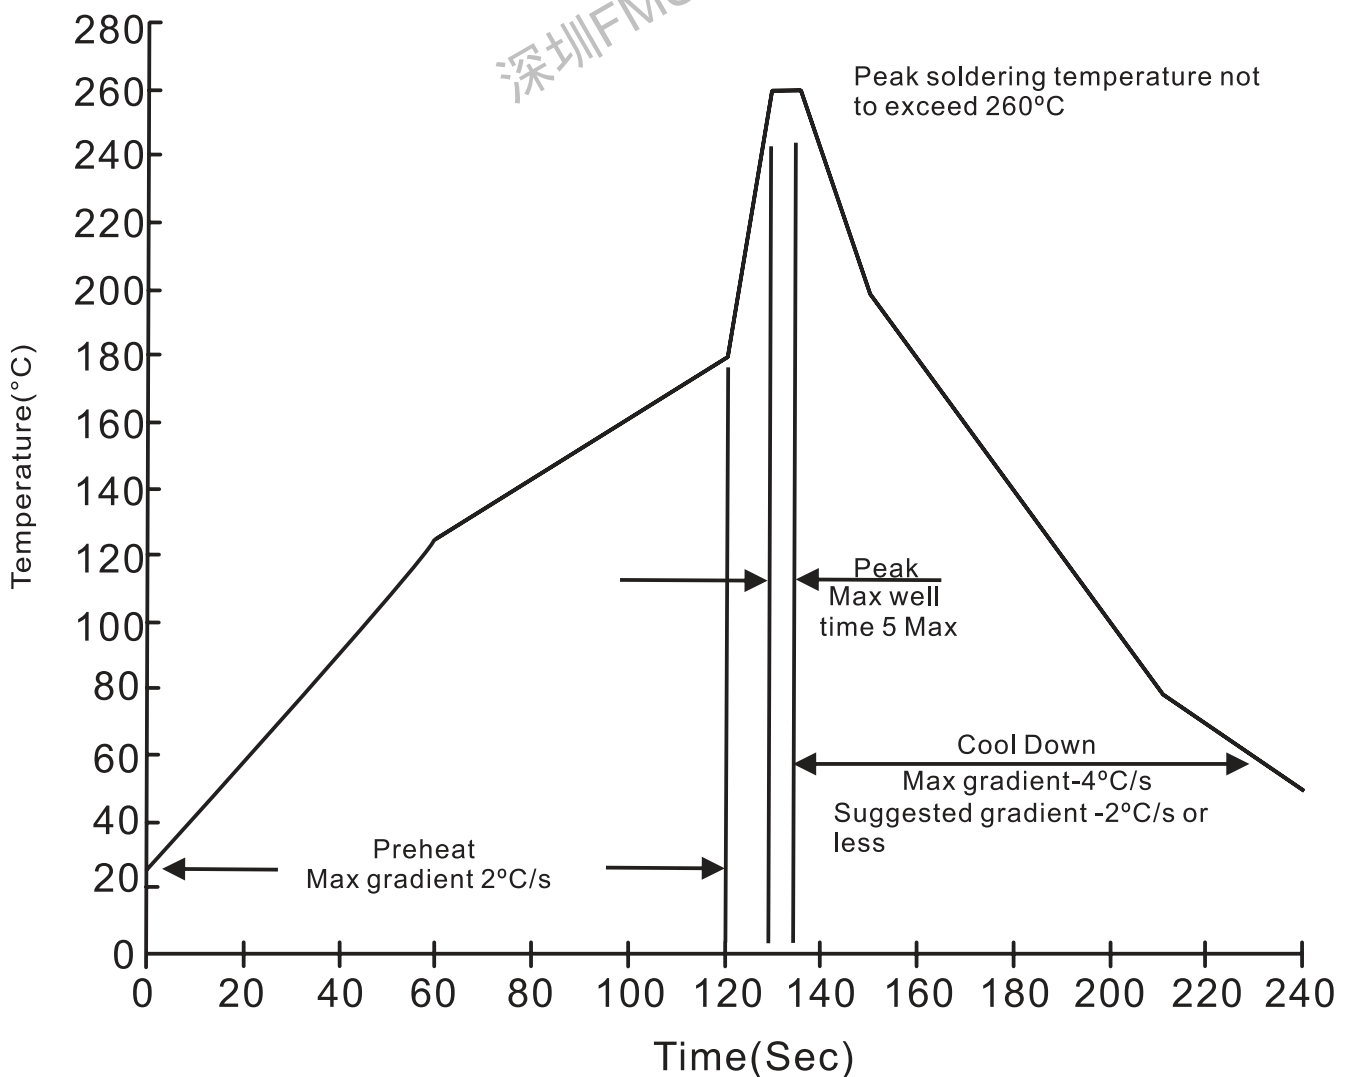

DB201 THRU DB207**High reliability test capabilities**

Item Test	Conditions	Reference
1. Solder Resistance	at 260±5°C for 10±2sec. immerse body into solder 1/16"±1/32"	MIL-STD-750D METHOD-2031
2. Solderability	at 245±5°C for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_R=80\%$ rate at $T_J=150^\circ\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Forward Operation Life	Rated average rectifier current at $T_A=25^\circ\text{C}$ for 500hrs.	MIL-STD-750D METHOD-1027
5. Intermittent Operation Life	$T_A=25^\circ\text{C}$, $I_F=I_O$ On state: power on for 5 min. off state: power off for 5 min. on and off for 500 cycles.	MIL-STD-750D METHOD-1036
6. Pressure Cooker	15P _{SIG} at $T_A=121^\circ\text{C}$ for 4 hrs.	JESD22-A102
7. Temperature Cycling	-55°C to +125°C dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
8. Thermal Shock	0°C for 5 min. rise to 100°C for 5 min. total 10 cycles.	MIL-STD-750D METHOD-1056
9. Forward Surge	8.3ms single half sine-wave superimposed on rated load, one surge.	MIL-STD-750D METHOD-4066-2
10. Humidity	at $T_A=85^\circ\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
11. High Temperature Storage Life	at 175°C for 1000 hrs.	MIL-STD-750D METHOD-1031