

IF SAW Filter for CATV System Image

For Industrial Use

Features

- A filter with superb filter characteristics.
- It has not been adjusted.
- Highly reliable.

Pb Free


RoHS Compliant
Directive 2002/95/EC



Specifications

Model	WF019A	
Nominal frequency : f ₀ (MHz)	58.75	
3-dB passband width (MHz)	+0.75 / -4.08 min.	
In-band deviation (-3.58 to 0MHz max.)(dB)	±1 max	
Insertion loss (dB)	32max.	
Guaranteed attenuation (dB)	f ₀ -5.25 to -4.45MHz	32min.
	f ₀ +1.25 to +3MHz	30min.
Input impedance (Ω)	75	
Output impedance (Ω)	75	
Operating temperature range (°C)	-20 to +60	
Package model name	PK-2(a)	

Dimensions

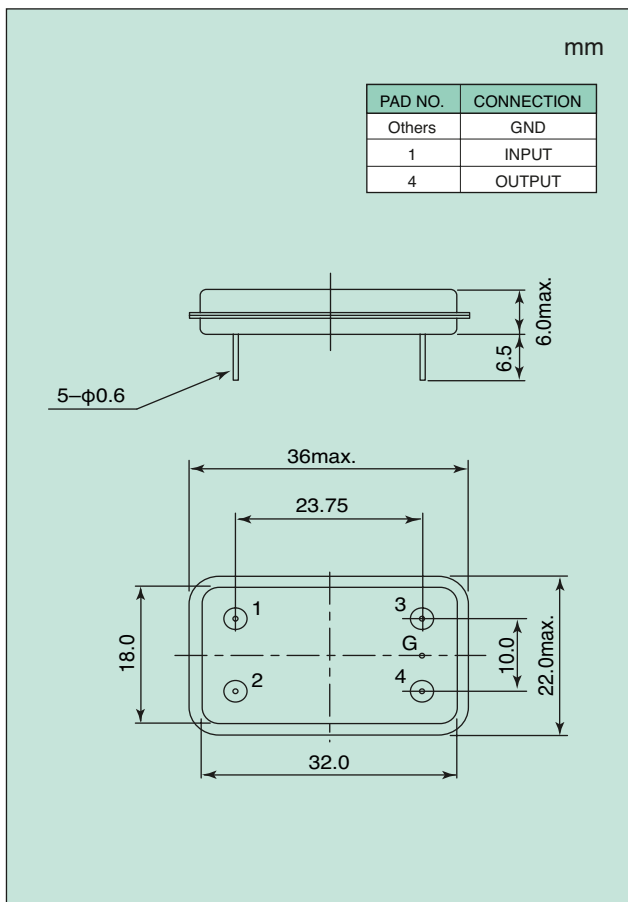

Characteristics

