

Silicon NPN Power Transistors

2N5664 2N5665

DESCRIPTION

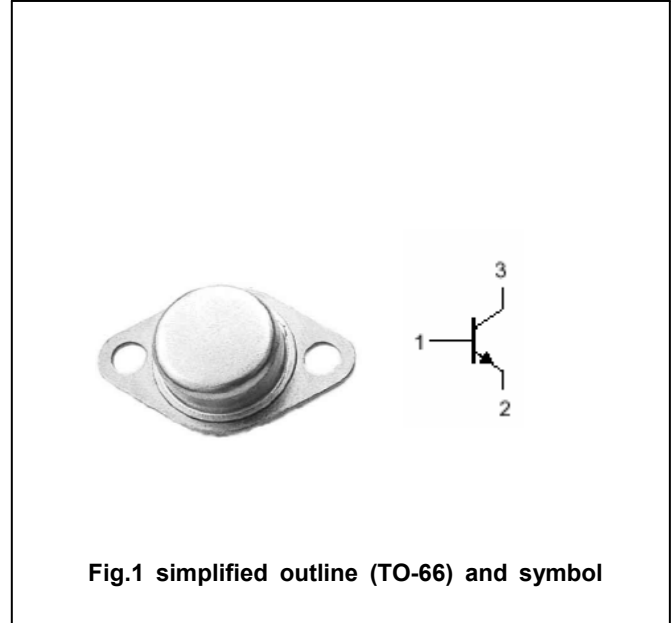
- With TO-66 package
- High breakdown voltage

APPLICATIONS

- High speed switching and linear amplifier
- High-voltage operational amplifiers
- Switching regulators ,converters
- Deflection stages and high fidelity amplifiers

PINNING (See Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

Absolute maximum ratings($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2N5664	250	V
		2N5665	400	
V_{CEO}	Collector-emitter voltage	2N5664	200	V
		2N5665	300	
V_{EBO}	Emitter-base voltage	Open collector	6	V
I_C	Collector current		5.0	A
I_B	Base current		1.0	A
P_T	Total power dissipation	$T_C=25^\circ\text{C}$	52.5	W
T_j	Junction temperature		200	$^\circ\text{C}$
T_{stg}	Storage temperature		-65~200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal resistance junction to case	5.0	$^\circ\text{C}/\text{W}$

Silicon NPN Power Transistors

2N5664 2N5665

CHARACTERISTICS

T_j=25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	2N5664	I _C =10mA ; I _B =0			V
		2N5665				
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =10μA ; I _C =0	6			V
V _{CEsat-1}	Collector-emitter saturation voltage	2N5664	I _C =3A ; I _B =0.3A		0.4	V
		2N5665	I _C =3A ; I _B =0.6A			
V _{CEsat-2}	Collector-emitter saturation voltage	I _C =5A ; I _B =1A			1.0	V
V _{BEsat-1}	Base-emitter saturation voltage	2N5664	I _C =3A ; I _B =0.3A		1.2	V
		2N5665	I _C =3A ; I _B =0.6A			
V _{BEsat-2}	Base-emitter saturation voltage	I _C =5A ; I _B =1A			1.5	V
I _{CES}	Collector cut-off current	2N5664	V _{CE} =200V ; V _{BE(off)} =1.5V		0.2	mA
		2N5665	V _{CE} =300V ; V _{BE(off)} =1.5V			
I _{CBO}	Collector cut-off current	2N5664	V _{CB} =250V ; I _E =0		1.0	mA
		2N5665	V _{CB} =400V ; I _E =0			
h _{FE-1}	DC current gain	2N5664	I _C =0.5A ; V _{CE} =2V			
		2N5665				
h _{FE-2}	DC current gain	2N5664	I _C =1A ; V _{CE} =5V		120	
		2N5665				
h _{FE-3}	DC current gain	2N5664	I _C =3A ; V _{CE} =5V		15	
		2N5665				
h _{FE-4}	DC current gain	I _C =5A ; V _{CE} =5V	5			
C _{OB}	Output capacitance	I _E =0 ; V _{CB} =10V ; f=1MHz			120	pF
t _{on}	Turn-on time	V _{CC} =30V ; I _C =1A ; I _{B1} =-I _{B2} =30mA			0.25	μs
t _{off}	Turn-off time	2N5664	V _{CC} =30V ; I _C =1A ; I _{B1} =-I _{B2} =50mA		1.5	μs
		2N5665				

Silicon NPN Power Transistors

2N5664 2N5665

PACKAGE OUTLINE



Fig.2 Outline dimensions