

MAC Series 14 Pin DIP Oscillator



- Industry Standard Package
- RoHS Compliant Available
- 32.768KHz
- CMOS Output



Frequency Range	32.768KHZ
Frequency Stability (Inclusive of Temperature, Load, Voltage and Aging)	See Part Number Guide
Operating Temperature	See Part Number Guide
Storage Temperature	-55°C to +125°C
Supply Voltage	5.0VDC ±10%
Supply Current	10mA max
Waveform	CMOS
Logic "0"	10% Vdd max
Logic "1"	90% Vdd min
Duty Cycle	See Part Number Guide
Load	10K Ohms // 15pF
Rise / Fall Time	10% to 90% of waveform
	10nSec max
Tri-State Operation	Voh = 70% of Vdd min or No Connection to Enable Output Vol = 30% of Vdd max or grounded to Disable Output (High Impedance)

Environmental & Mechanical Detail

Shock	MIL-STD-883, Method 2002 Cond B
Solderability	MIL-STD-883, Method 2003
Solvent Resistance	MIL-STD-202, Method 215
Vibration	MIL-STD-883, Method 2007, Cond A
Gross Leak Test	MIL-STD-883, Method 1014, Cond C
Fine Leak Test	MIL-STD-883, Method 1014, Cond A2
MSL	Level 1 per IPC/JEDEC J-STD 20

Marking Detail

Line 1 = MXXXXX		
M	=	MMD
XXXXX	=	Frequency in MHZ
Line 2 = SYYWWL		
S	=	Internal Code
YYWW	=	4 Numerical Digit Date Code (Year / Week)
L	=	Denotes RoHS Compliant
Line 3 = XXXXX		
Internal use only		
May vary with lots		
Pin 1 Designator		




MMD Monitor/Quartztek
 30400 Esperanza, Rancho Santa Margarita, CA, 92688
 Phone: (949) 709-5075, Fax: (949) 709-3536, www.mmdcomp.com
 Sales@mmdcomp.com



In the event of conflict, the requirements of this specification shall govern.
 Revisions only with customer approval


Revision: 11/18/10 E

Part Number Guide

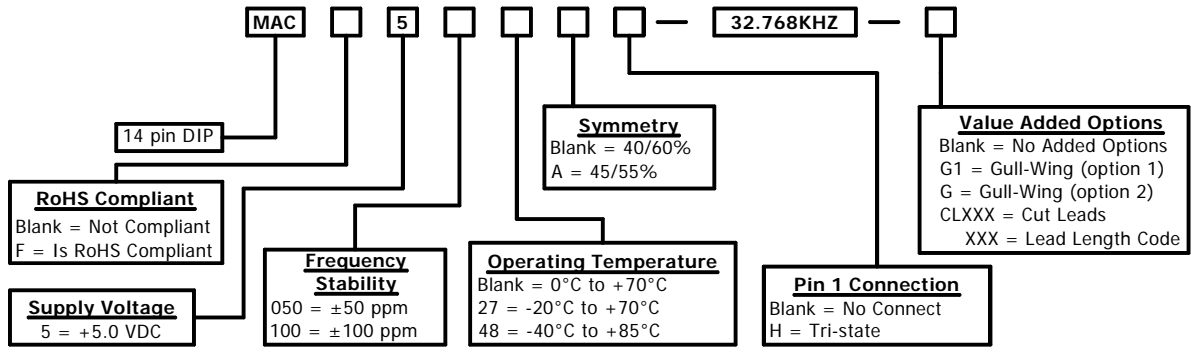

PLEASE CONSULT WITH MMD SALES DEPARTMENT FOR ANY OTHER PARAMETERS OR OPTIONS

Mechanical Details

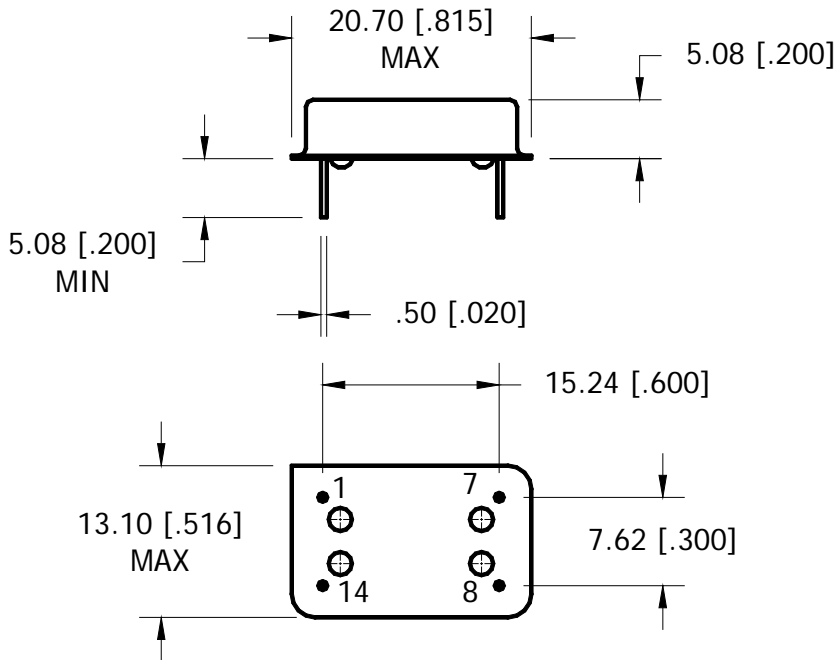

MXXXXX
 SYYWWL
 XXXXX

PIN CONNECTIONS	
PIN 1	N/C OR TRI-STATE
PIN 7	CASE GROUND
PIN 8	OUTPUT
PIN 14	SUPPLY VOLTAGE

DIMENSIONS IN BRACKET ARE IN INCHES
EXTERNAL BYPASS CAPACITOR RECOMMENDED



MMD Monitor/Quartztek
 30400 Esperanza, Rancho Santa Margarita, CA, 92688
 Phone: (949) 709-5075, Fax: (949) 709-3536, www.mmdcomp.com
 Sales@mmdcomp.com

