



Features

- High performance Ferrite core material.
- Broad current capacity from 3 to 30 Ampere.
- Counter measure for EMI/RFI suppression of conducted noise in power sources or signal lines.


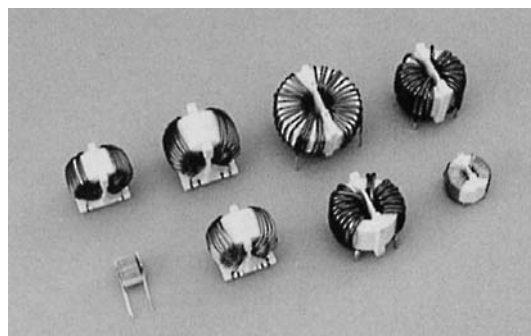


RCV SERIES



N Type



P Type



RCH SERIES



Electrical Specifications

	Rated Current (A)	Inductance min (mH)	Insulation resistance (mΩ)	Dimensions					φ	Temp. Rise (max)	Operating Temperature (°C)
				A. Max.	B. Max.	C. Max.	*D	*E			
RCV103-10N	3	1.0	70	17	17	15	7	11	0.6	40 deg	-25 ~ +65
RCV105-10N	5	1.0	55	25	24	19	10	16	0.8	50 deg	-25 ~ +55
RCV105-20N	5	2.0	55	25	24	19	10	16	0.8	50 deg	-25 ~ +55
RCV110-10N	10	1.0	25	34	34	23	16	20	1.3	55 deg	-25 ~ +75
RCV110-10P	10	1.0	25	34	35	23	18	16	1.3	55 deg	-25 ~ +75
RCV115-07N	15	0.7	9	34	34	27	16	20	1.5	55 deg	-25 ~ +75
RCV115-07P	15	0.7	9	34	35	27	18	16	1.5	55 deg	-25 ~ +75
RCV115-16N	15	1.6	15	37	37	27	23	25	1.7	55 deg	-25 ~ +75
RCV115-16P	15	1.6	15	37	38	27	20	22	1.7	55 deg	-25 ~ +75
RCV120-12N	20	1.2	14	39	39	29	23	25	2.0	60 deg	-25 ~ +70
RCV120-12P	20	1.2	14	39	40	29	20	22	2.0	60 deg	-25 ~ +70
RCV125-07N	25	0.7	7	41	41	30	23	25	2.3	55 deg	-25 ~ +75
RCV125-07P	25	0.7	7	41	42	30	12	22	2.3	55 deg	-25 ~ +75
RCV130-06N	30	0.6	5	65	65	40	25	35	3.2	40 deg	-25 ~ +90
RCH203-10N	3	1.0	70	17	17	15	11	12	0.6	40 deg	-25 ~ +65
RCH205-10N	5	1.0	55	25	24	19	12	18	0.8	50 deg	-25 ~ +55
RCH205-20N	5	2.0	55	25	24	19	12	18	0.8	50 deg	-25 ~ +55
RCH210-10N	10	1.0	25	34	34	23	21	22	1.3	55 deg	-25 ~ +75
RCH215-07N	15	0.7	10	34	34	23	21	22	1.5	55 deg	-25 ~ +75
RCH215-16N	15	1.6	15	37	37	27	23	25	1.7	55 deg	-25 ~ +75
RCH220-12N	20	1.2	14	39	39	29	23	25	2.0	60 deg	-25 ~ +70
RCH225-07N	25	0.7	7	41	41	30	23	25	2.3	60 deg	-25 ~ +70
RCH230-06N	30	0.6	5	65	65	40	18	28	3.2	40 deg	-25 ~ +90

* reference