

RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free

## FEATURES


- Small Flat Package
- Low Saturation Voltage
- Power Amplifier and Switching Application

## PACKAGE INFORMATION


Package	MPQ	Leader Size
SOT-89	1K	7' inch

## CLASSIFICATION OF $h_{FE1}$

Product	BCPA1666-O	BCPA1666-Y
Range	70~140	120~240
Marking	WO	WY



## SOT-89

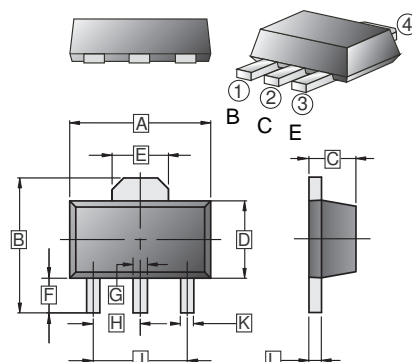

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	4.40	4.60	G	0.40	0.58
B	3.94	4.25	H	1.50	TYP
C	1.40	1.60	J	3.00	TYP
D	2.30	2.60	K	0.32	0.52
E	1.50	1.70	L	0.35	0.44
F	0.89	1.20			

## ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Collector-Base Voltage	$V_{CBO}$	-50	V
Collector-Emitter Voltage	$V_{CEO}$	-50	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current -Continuous	$I_C$	-2	A
Collector Power Dissipation	$P_C$	0.5	W
Maximum Junction to Ambient	$R_{\theta JA}$	250	$^\circ\text{C} / \text{W}$
Junction & Storage Temperature	$T_J, T_{STG}$	150, -55~150	$^\circ\text{C}$

## PNP ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Collector-base breakdown voltage	$V_{(BR)CBO}$	-50	-	-	V	$I_C = -1\text{mA}, I_E = 0$
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	-50	-	-	V	$I_C = -10\text{mA}, I_B = 0$
Emitter-base breakdown voltage	$V_{(BR)EBO}$	-5	-	-	V	$I_E = -1\text{mA}, I_C = 0$
Collector cut-off current	$I_{CBO}$	-	-	-100	nA	$V_{CB} = -50\text{V}, I_E = 0$
Emitter cut-off current	$I_{EBO}$	-	-	-100	nA	$V_{EB} = -5\text{V}, I_C = 0$
DC current gain <sup>1</sup>	$h_{FE1}$	70	-	240		$V_{CE} = -2\text{V}, I_C = -500\text{mA}$
	$h_{FE2}$	40	-	-		$V_{CE} = -2\text{V}, I_C = -1.5\text{A}$
Collector-emitter saturation voltage <sup>1</sup>	$V_{CE(sat)}$	-	-	-0.5	V	$I_C = -1\text{A}, I_B = -50\text{mA}$
Base-emitter saturation voltage <sup>1</sup>	$V_{BE(sat)}$	-	-	-1.2	V	$I_C = -1\text{A}, I_B = -50\text{mA}$
Transition frequency	$f_T$	-	120	-	MHZ	$V_{CE} = -2\text{V}, I_C = -500\text{mA},$
Output Capacitance	$C_{OB}$	-	-	40	pF	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$

Note:

1. Pulse test: pulse width  $\leq 300\text{ms}$ , duty cycle  $\leq 2.0\%$ .