

# New Jersey Semi-Conductor Products, Inc.

**20 STERN AVE.  
SPRINGFIELD, NEW JERSEY 07081  
U.S.A.**

**TELEPHONE:** (201) 376-2922  
(212) 227-6005  
**FAX:** (201) 376-8960

**2N404**

## JUNCTION TRANSISTOR

### Germanium p-n-p Alloy Type

## SWITCHING SERVICE

#### **Maximum Ratings, Absolute Values:**


MAXIMUM RATINGS, INPUT		
COLLECTOR-TO-BASE VOLTAGE.	. . . . .	-25 max.      volts
COLLECTOR-TO-EMITTER VOLTAGE	. . . . .	-24 max.      volts
COLLECTOR CURRENT.	. . . . .	-100 max.      ma
EMITTER-TO-BASE VOLTAGE.	. . . . .	-12 max.      volts
EMITTER CURRENT.	. . . . .	100 max.      ma
COLLECTOR DISSIPATION (See Rating Chart):		
At ambient temperature of 25° C.	. . .	120 max.      mw
At ambient temperature of 55° C.	. . .	35 max.      mw
At ambient temperature of 71° C.	. . .	10 max.      mw
AMBIENT TEMPERATURE:		
Operating.	. . . . .	85 max.      °C
Storage	. . . . .	-65 to +85      °C

## CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

Voltage values are given with respect to the base unless otherwise specified. Ambient temperature =  $25^{\circ}\text{C}$

	Typical	Min.	Max.		Stored Base Charge with DC Collector Current = -10 ma, DC Base Current = -1 ma . . . . .	800	-	1400	$\mu$ cou- lombs
DC Collector Breakdown Voltage with dc collector current = -20 $\mu$ a, dc emitter current = 0. . . . .	-40	-25	-	volts					
DC Collector Cutoff Current with dc collector voltage = -12 volts, dc emitter current = 0.	-2	-	-5	$\mu$ a					
DC Collector Cutoff Current with dc collector voltage = -12 volts, dc emitter current = 0 and ambient temperature = 80° C .	-45	-	-90	$\mu$ a					
DC Emitter Breakdown Voltage with dc emitter current = -20 $\mu$ a, dc col- lector current = 0 .	-35	-12	-	volts					
DC Emitter Cutoff Current with dc emitter voltage = -2.5 volts, dc collector current = 0. . . . .	-1	-	-2.5	$\mu$ a					
DC Collector-to- Emitter (Punch- Through) Voltage*	-40	-24	-	volts	Alpha-Cutoff Fre- quency with dc collector voltage = -6 volts, dc emitter current = 1 ma . . . . .	12	4	-	M
					Collector Capac- tance with dc col- lector voltage = -6 volts, dc emitter current = 0.	12	-	20	$\mu$ uf
					Junction Temperature Rise in free air . .	0.28	-	0.35	$^{\circ}$ C/mw

- \* The dc collector-to-emitter (punch-through) voltage may be determined by connecting a high-impedance voltmeter (11 megohms or greater) between the emitter and base and measuring the collector-to-base voltage which causes the emitter to assume an emitter-to-base floating voltage of -1 volt. In making this test, care must be taken not to exceed the maximum collector-to-base voltage spec found under Maximum Ratings.

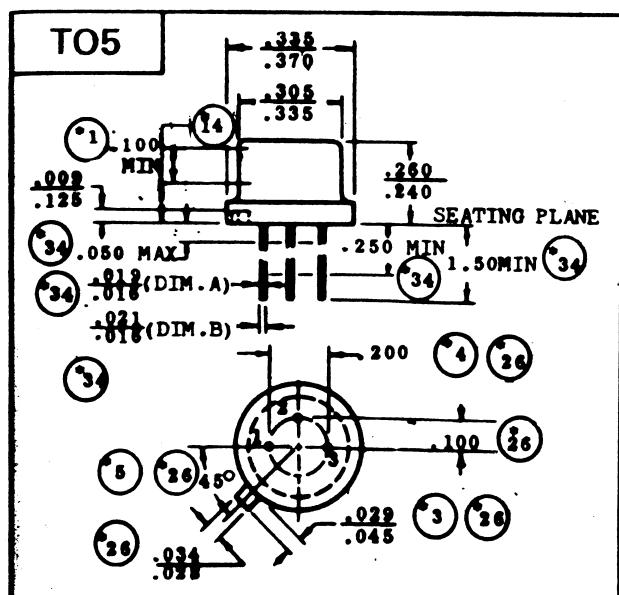

# Quality Semi-Conductors