

SPECIFICATIONS

Mechanical

Card Mating Force: 28.8N max

Card Retention Force: 4.9N MIN AND 25.4N MAX

Durability: 10000 Cycles.

Electrical

Contact Current Rating: 0.5A

Contact Resistance: : 40mW max. initial
60 mW After Endurance Test

Dielectric Withstanding Voltage: 500Vrms AC

Insulation Resistance: 1000MW max. initial

Physical

Housing: Thermoplastic, UL 94V-0 rated in White Color

Contact: Copper Alloy

Plating: G/F

Operating Temperature: -40 to +85

CF Card Connector


CF Series

Right Angle, SMT


Normal Type

1.27mm [.05"] Pitch

50 Pos. (C/F)

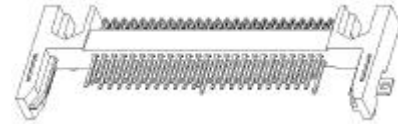

DRAWING

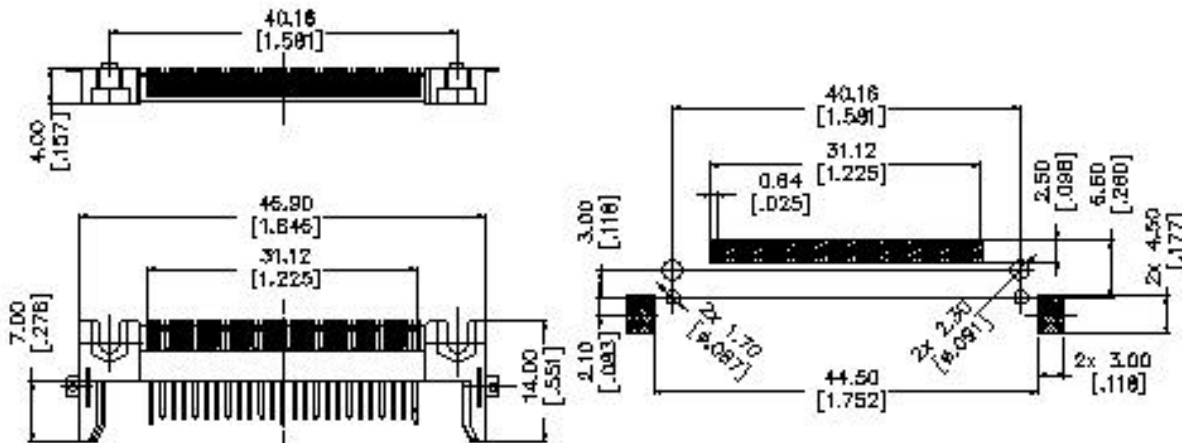

ORDERING INFORMATION

