
TÜV MANGEMEN SERVICE



An ISO/TS 16949, ISO 9001 and ISO 14001 Certified Company

## NPN PLASTIC MEDIUM POWER SILICON TRANSISTORS

BD157, BD158 TO-126

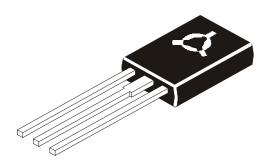

# Designed For Power Output Stages for Television, Radio, Phonograph And Other Consumer Applications.


#### **ABSOLUTE MAXIMUM RATINGS**

DESCRIPTION	SYMBOL	BD157	BD158	UNIT
Collector -Emitter Voltage	VCEO	250	300	V
Collector -Base Voltage	VCBO	275	325	V
Emitter Base Voltage	VEBO		5.0	V
Collector Current Continuous	IC		0.5	Α
Peak	IC		1.0	Α
Base Current	IB		0.25	Α
Power Dissipation @ Ta=25 deg C	PD		2.0	W
@ Tc=25 deg C			20	W
Derate Above =25 deg C			0.16	mW/deg C
Operating & Storage Junction	Tj, Tstg		-65 to +150	deg C
Temperature Range				
THERMAL RESISTANCE				
Junction to Case	Rth (j-c)		6.25	deg C/W

## ELECTRICAL CHARACTERISTICS (Tc=25 deg C unless specified)

DESCRIPTION	SYMBOL TEST CONDITION		MIN	MAX	UNIT	
Collector-Emitter Sustaining Voltage	VCEO	IC=1mA, IB=0	BD157	250	_	V
			BD158	300	-	V
Collector-Base Voltage	VCBO	IC=100uA, IE=0	BD157	275	-	V
_			BD158	325	-	V
Emitter Base Voltage	VEBO	IE=1mA, IC=0		5.0	-	V
Collector Cut-off Current	ICBO	VCB=275V, IE=0	BD157	-	100	uA
		VCB=325V, IE=0	BD158	-	100	uA
Emitter Cut-off Current	IEBO	VBE=5V,IC=0		-	100	uA
DC Current Gain	hFE	IC=50mA,VCE=10V		30	240	
<b>Collector Emitter Saturation Voltage</b>	VCESAT	IC=50mA, IB=5mA		-	1.0	V
Base Emitter Saturation Voltage	VBESAT	IC=50mA, IB=5mA		-	1.0	V
Current-Gain-Bandwidth Product	ft	IC=10mA, VCE=10V f=5 MHz		15	-	MHz
Output Capacitance	Cob	VCB=20V, f=1MHz Typ10		10	pF	

### TO-126 (SOT-32) Plastic Package

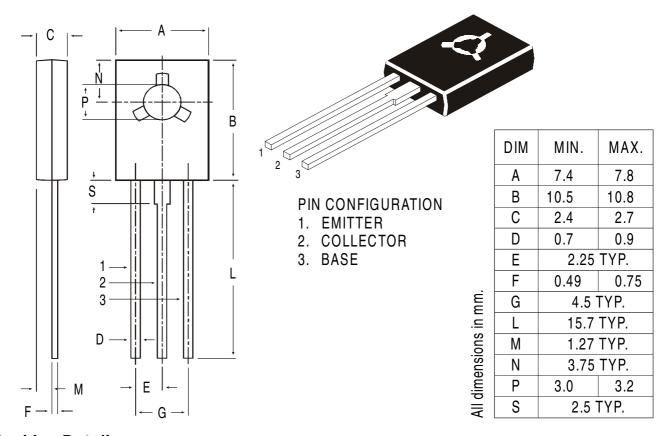

**Packing Detail** 

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
T0-126	500 pcs/polybag	340 gm/500 pcs	3" x 7.5" x 7.5"	2.0K	17" x 15" x 13.5"	32.0K	31 kgs

#### **Disclaimer**

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished on the CDIL Web Site/CD is believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of

#### Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-579 6150 Fax + 91-11-579 9569, 579 5290

e-mail sales@cdil.com www.cdil.com