



RLCO-808-1000-F

TECHNICAL DATA



High Power Infrared Laser Diode

Features

- Lasing Mode Structure: multi mode
- Peak Wavelength : typ. 808 nm
- Optical Output Power: 1 W
- Monitor PD (optional)
- Package: 4-pin DIL



Specifications

| Item | Symbol | Min. | Typ. | Max. | Unit |
|-----------------------------------|-----------------|------|---------|------|---------------|
| Optical Specifications | | | | | |
| CW Output Power | P_O | - | 1 | - | W |
| Center Wavelength | λ_C | 805 | 808 | 811 | nm |
| Spectral Width (FWHM) | $\Delta\lambda$ | - | 4 | - | nm |
| Fiber Buffer | | - | 230 | - | μm |
| Fiber Clad | | - | 125 | - | μm |
| Fiber Core | | - | 100 | - | μm |
| Numerical Aperture | | - | 0.12 | 0.22 | |
| Fiber Length | | - | 0.5 | - | m |
| Connector | | | SMA-905 | | |
| Electrical Specifications | | | | | |
| Threshold Current | I_{th} | - | 0.20 | - | A |
| Operating Current | I_{op} | - | 1.1 | - | A |
| Slope Efficiency | H | - | 0.65 | - | W/A |
| Operating Voltage | U_{op} | - | 1.85 | - | V |
| Wavelength Temperatur Coefficient | | - | 0.3 | - | nm/°C |
| Operating Temperature | T_{op} | - | 25 | - | °C |
| Storage Temperature | T_{stg} | -20 | - | 80 | °C |

The above specifications are for reference purpose only and subjected to change without prior notice.




NOTE
LASERDIODE
MUST BE COOLED



Package Dimensions

4-pin DIL Package (Unit: mm)

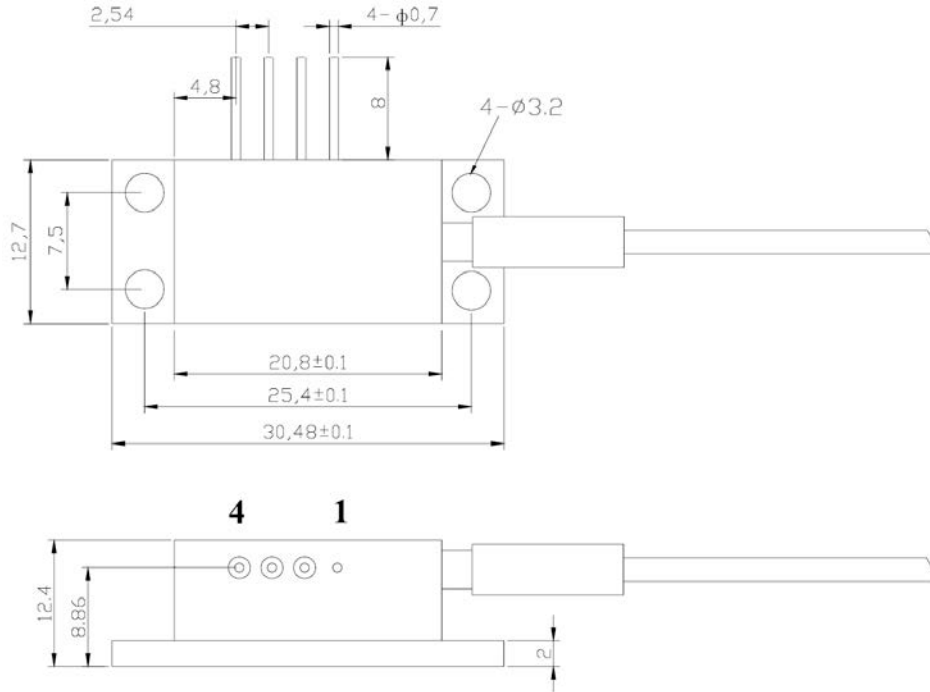

| PIN | Function |
|-----|-----------------|
| 1 | LD Anode (+) |
| 2 | LD Cathode (-) |
| 3 | PD Cathode (-)* |
| 4 | PD Anode (+)* |

*optional



Safety of Laser light

- Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the LDs, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.
- This LD is emitting invisible light.



Cautions

1. Operating methode

- This LD shall change its forward voltage requirement and optical output power according to temperature change. Also, the LD will require more operation current to maintain same output power as it degrades.
- Confirm that electrical spike current generated by switching on and off does not exceed the maximum operating current level specified herein above as absolute maximum rating. Also, employ appropriate countermeasures to reduce chattering and/or overshooting in the circuit.

2. Static Electricity

- Static electricity or electrical surges will reduce and degrade the reliability of the LDs. It is recommended to use a wrist trap or anti-electrostatic glove when handling the product.

3. Absolute Maximum Rating

- Active layer of LDs shall have high current density and generate high electric field during its operation. In order to prevent excessive damage, the LD must be operated strictly below absolute maximum rating.



NOTE

LASERDIODE
MUST BE COOLED