



## DESCRIPTION

- 60 MHz SAW bandpass filter with 6.15 MHz bandwidth.
- 35.1 x 20.6 mm 24-pin DIP package.
- RoHS compliant.


## TYPICAL PERFORMANCE

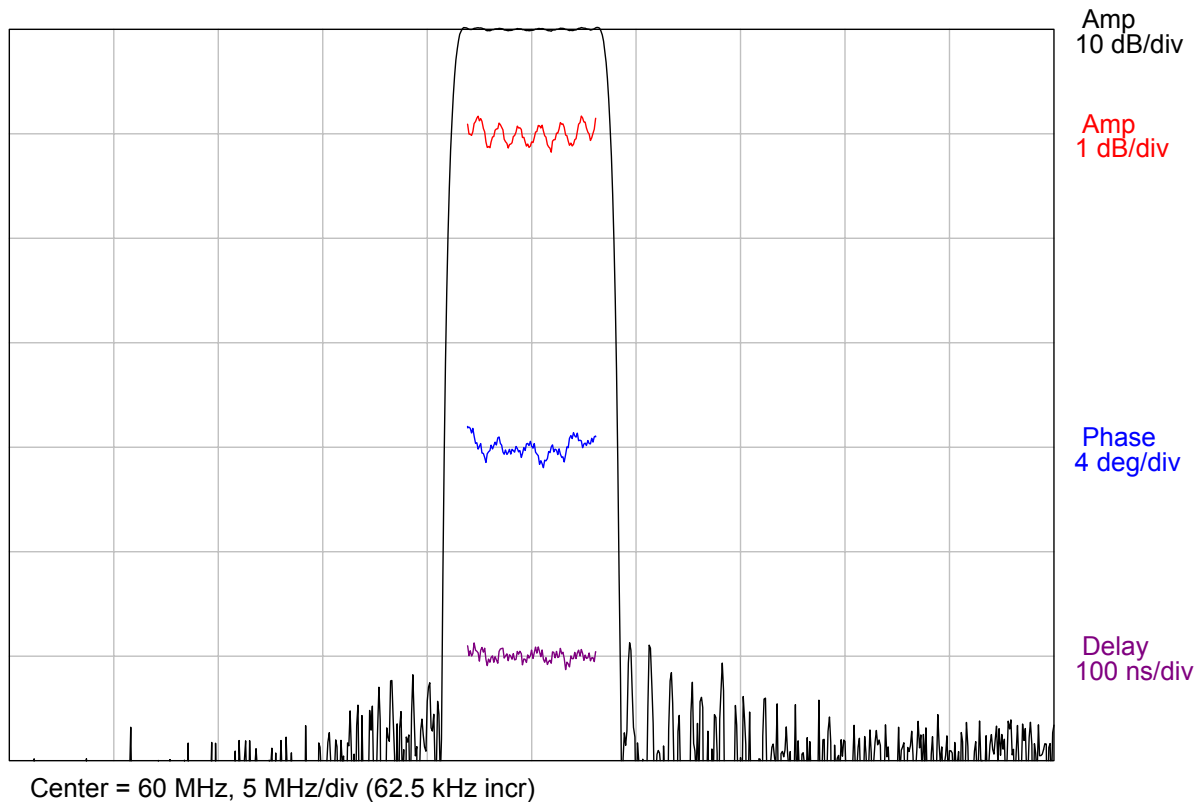

**S11 (35-85 MHz)**

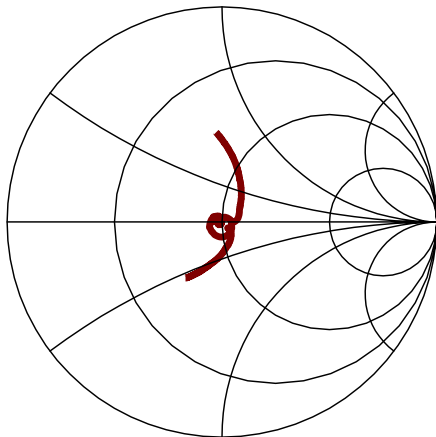

**S22 (35-85 MHz)**

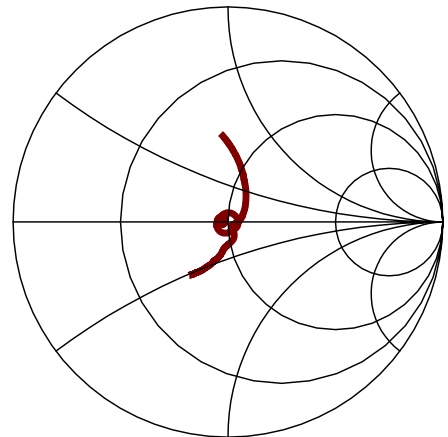

## SPECIFICATION


Parameter	Min	Typ	Max	Units
Center Frequency (Fc) <sup>1</sup>	59.90	60.00	60.10	MHz
1dB Bandwidth <sup>2</sup>	6.15	6.92	-	MHz
3dB Bandwidth <sup>2</sup>	-	7.18	7.25	MHz
55dB Bandwidth <sup>2</sup>	-	8.47	9.85	MHz
Device Delay	2.9	2.92	3	us
Average Insertion Loss <sup>3</sup>	-	27.9	34	dB
Passband Amplitude Ripple <sup>3</sup>	-	0.35	0.4	dB p-p
Passband Phase Ripple <sup>3</sup>	-	1.6	2	deg p-p
Triple Travel and Spurious	55	58	-	dB
Input VSWR (at 60 MHz at 25C)	-	1.35	1.5	:1
Output VSWR at 60 MHz at 25C)	-	1.35	1.5	:1
Temperature Coefficient	-	-74	-	ppm/°C
Source and Load Impedance	-	50	-	Ω
Ambient Temperature	25			°C

- Notes:
1. Defined as the average of the lower and upper 3 dB frequencies at room ambient.
  2. All dB levels are defined relative to the insertion loss.
  3. Evaluated from 56.925 to 63.075 MHz at room ambient.

## MAXIMUM RATINGS

Parameter	Min	Max	Units
Storage Temperature Range	-40	85	°C
Operating Temperature Range	-25	85	°C
Input Power Level	-	13	dBm

## MATCHING CIRCUIT

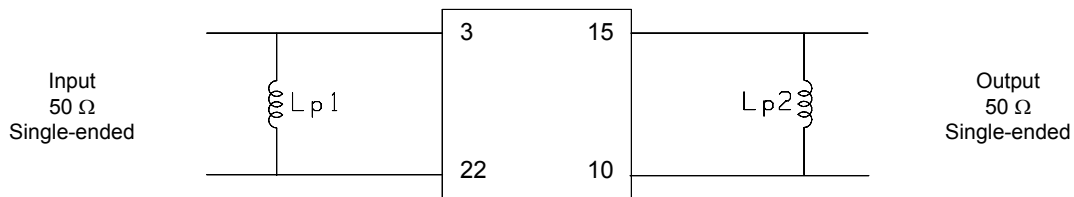


$$L_{p1} = 180 \text{ nH}$$

$$L_{p2} = 180 \text{ nH}$$

Notes:

- Recommend 2% toleranced matching components. Typical Inductor Q=40.
- Values shown are for guidance only and may change depending upon board layout.

**PACKAGE OUTLINE**

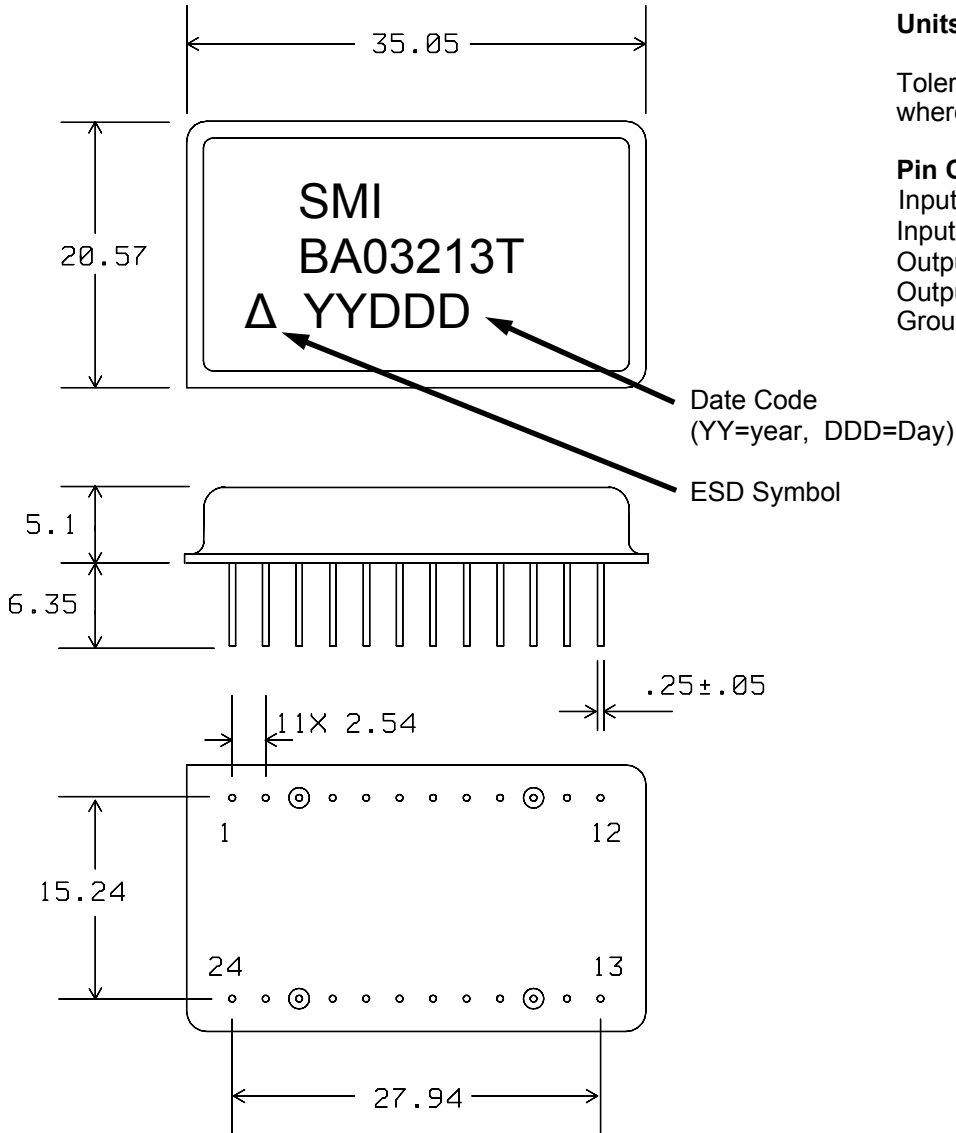

**Units:** mm

Tolerances are ±0.15 mm except where indicated.

**Pin Configuration:**

Input:	3
Input Return:	22
Output:	15
Output Return:	10
Ground:	All other pins

ISO 9001  
Registered

All specifications are believed to be accurate and reliable. However, Spectrum Microwave reserves the right to make changes without notice.  
 © 2010 All rights reserved.