



SPN8902

N-Channel Enhancement Mode MOSFET

DESCRIPTION

The SPN8902 is the N-Channel logic enhancement mode power field effect transistor which is produced using super high cell density DMOS trench technology. The SPN8910 has been designed specifically to improve the overall efficiency of DC/DC converters using either synchronous or conventional switching PWM controllers. It has been optimized for low gate charge, low $R_{DS(ON)}$ and fast switching speed.

FEATURES


- ◆ 100V/2A, $R_{DS(ON)} = 330m\Omega @ V_{GS} = 10V$
- ◆ High density cell design for extremely low $R_{DS(ON)}$
- ◆ Exceptional on-resistance and maximum DC current capability
- ◆ SOT-223 package design

APPLICATIONS

- High Frequency Small Power Switching for MB/NB/VGA
- Network DC/DC Power System
- Load Switch

PIN CONFIGURATION

SOT-223

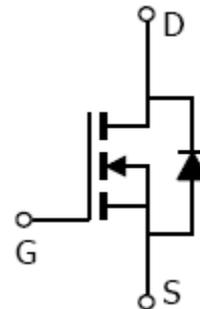

PART MARKING





SPN8902

N-Channel Enhancement Mode MOSFET

PIN DESCRIPTION

Pin	Symbol	Description
1	G	Gate
2	D	Drain
3	S	Source

ORDERING INFORMATION

Part Number	Package	Part Marking
SPN8902S22RGB	SOT-223	8902

※ SPN8902S22RGB : Tape Reel ; Pb – Free ; Halogen – Free

※ Date code : YY (year 00~99) , WW(week 01~53)

ABSOLUTE MAXIMUM RATINGS

($T_A=25^{\circ}\text{C}$ Unless otherwise noted)

Parameter	Symbol	Typical	Unit
Drain-Source Voltage	V_{DSS}	100	V
Gate –Source Voltage	V_{GSS}	± 20	V
Continuous Drain Current($T_J=150^{\circ}\text{C}$)	I_D	$T_A=25^{\circ}\text{C}$ 2.2	A
		$T_A=70^{\circ}\text{C}$ 1.7	
Pulsed Drain Current	I_{DM}	5.5	A
Power Dissipation	P_D	2.8	W
Operating Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55/150	$^{\circ}\text{C}$
Thermal Resistance-Junction to Ambient	$R_{\theta JA}$	90	$^{\circ}\text{C}/\text{W}$



SPN8902

N-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS


(TA=25°C Unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	100			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1	1.5	2.5	
Gate Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 20V$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=80V, V_{GS}=0V$			1	uA
		$V_{DS}=80V, V_{GS}=0V$ $T_J=125^\circ C$			5	
On-State Drain Current	$I_{D(on)}$	$V_{DS}\geq 5V, V_{GS}=10V$	2.2			A
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=2A$		0.31	0.33	Ω
		$V_{GS}=4.5V, I_D=1A$		0.33	0.35	Ω
Forward Transconductance	g_{fs}	$V_{DS}=5V, I_D=2A$		2.4		S
Diode Forward Voltage	V_{SD}	$I_S=1A, V_{GS}=0V$			1.2	V
Dynamic						
Total Gate Charge	Q_g	$V_{DS}=50V, V_{GS}=10V$ $I_D=2A$		9	13	nC
Gate-Source Charge	Q_{gs}			2		
Gate-Drain Charge	Q_{gd}			1.4		
Input Capacitance	C_{iss}	$V_{DS}=15V, V_{GS}=0V$ $f=1MHz$		508		pF
Output Capacitance	C_{oss}			29		
Reverse Transfer Capacitance	C_{rss}			16.5		
Turn-On Time	$t_{d(on)}$	$V_{DD}=50V, I_D=2A,$ $V_{GEN}=10V, R_G=3.3\Omega$		2		nS
	t_r			21.5		
Turn-Off Time	$t_{d(off)}$			11.2		
	t_f			18.8		




SPN8902 N-Channel Enhancement Mode MOSFET


TYPICAL CHARACTERISTICS

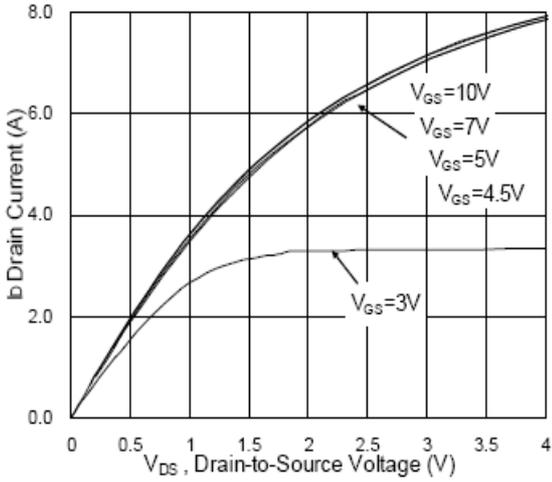


Output Characteristics

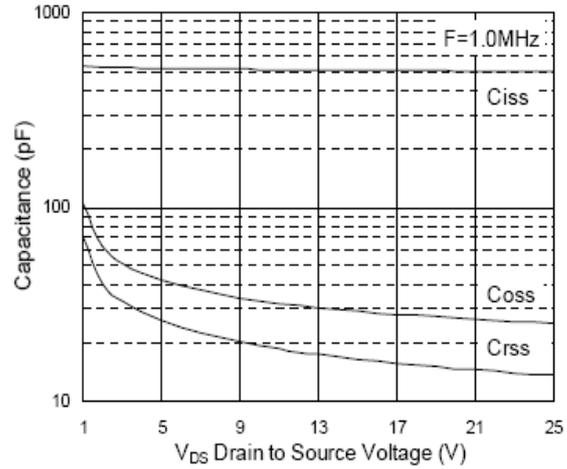

Capacitance

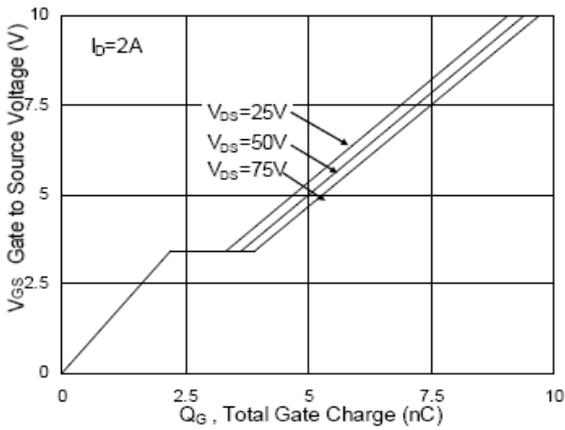

Gate Charge

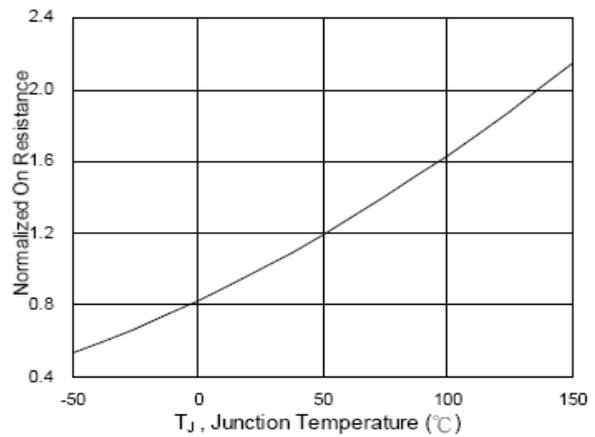


On-Resistance vs. Junction Temperature




SPN8902

N-Channel Enhancement Mode MOSFET


TYPICAL CHARACTERISTICS

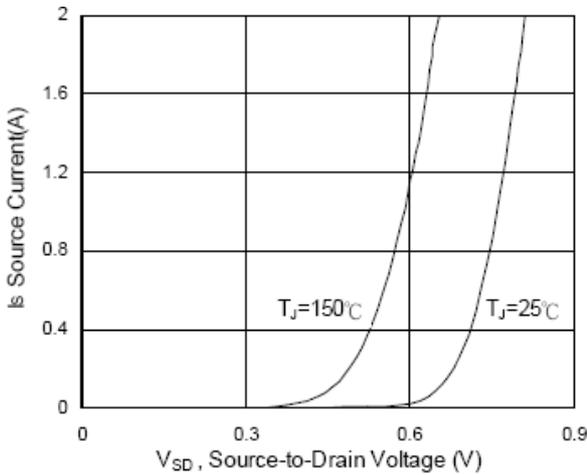

Source-Drain Diode Forward Voltage

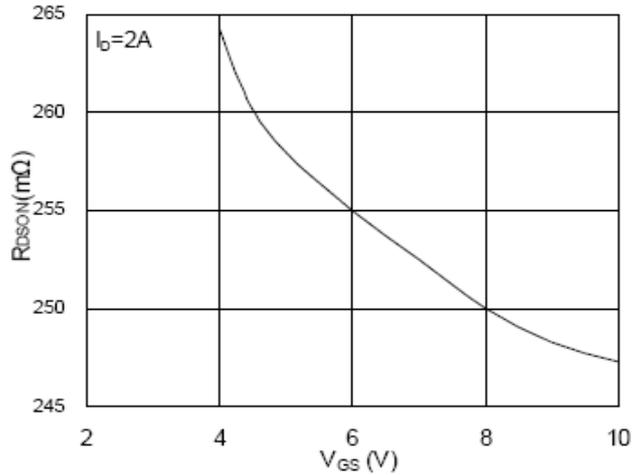

On-Resistance vs. Gate-Source Voltage

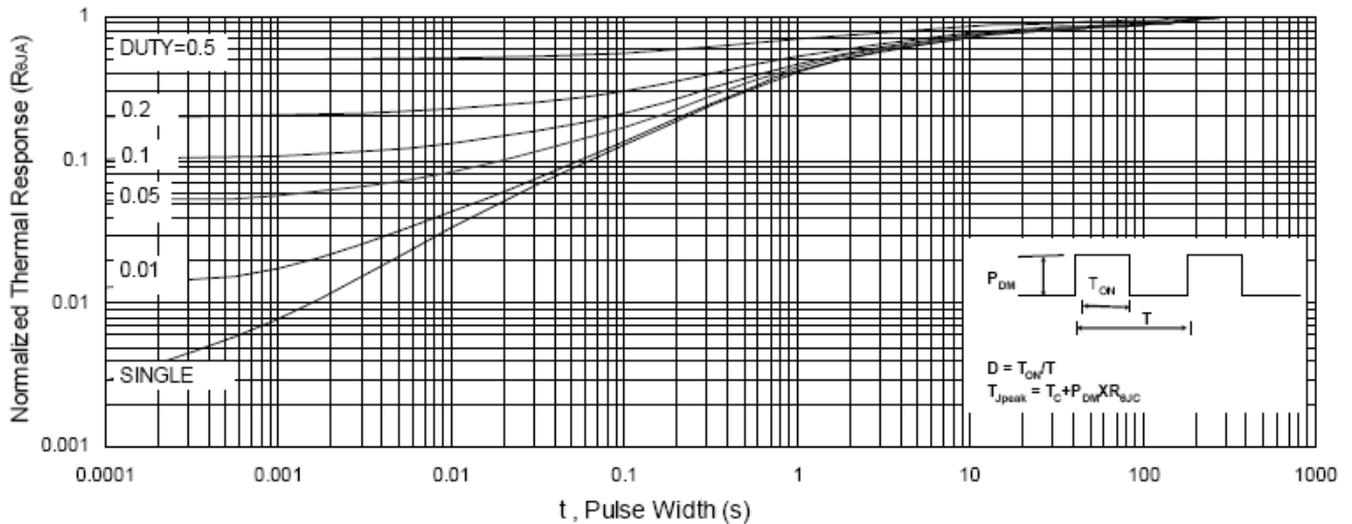


Normalized Thermal Transient Impedance, Junction to Foot



SPN8902

N-Channel Enhancement Mode MOSFET

SOT-223 PACKAGE OUTLINE

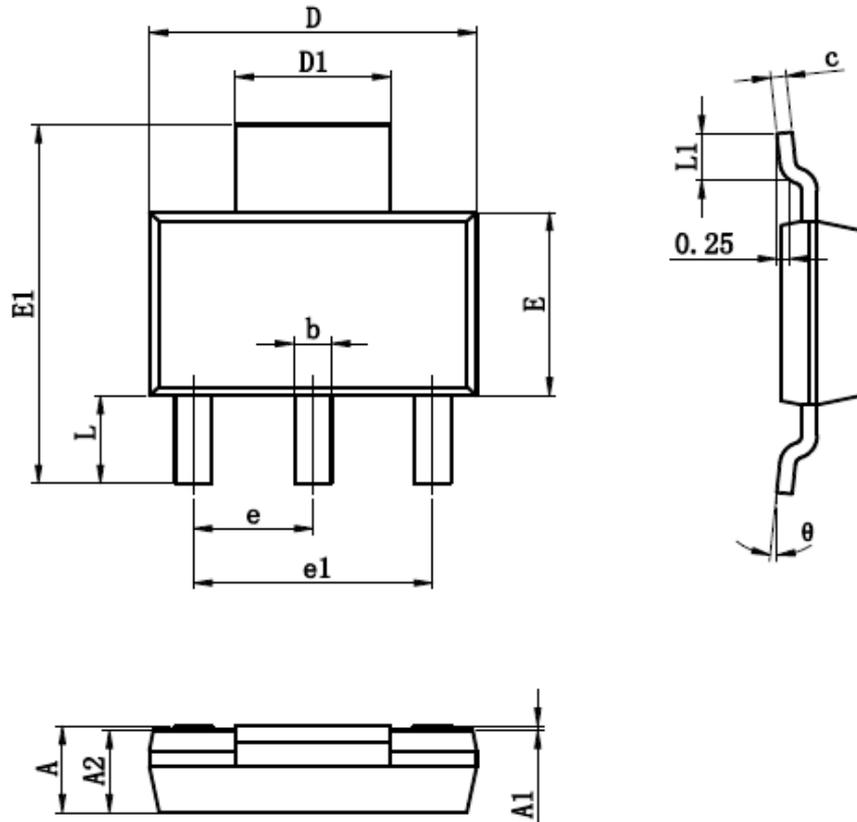

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.520	1.800	0.060	0.071
A1	0.020	0.100	0.001	0.004
A2	1.500	1.700	0.059	0.067
b	0.610	0.810	0.024	0.032
c	0.250	0.350	0.010	0.014
D	6.300	6.700	0.248	0.264
D1	2.900	3.100	0.114	0.122
E	3.300	3.700	0.130	0.146
E1	6.700	7.300	0.264	0.287
e	2.300TYP		0.091TYP	
e1	4.500	4.700	0.177	0.185
L	1.750TYP		0.069TYP	
L1	0.900		0.035	
θ	0°	10°	0°	10°



SPN8902

N-Channel Enhancement Mode MOSFET

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties which may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

©The SYNC Power logo is a registered trademark of SYNC Power Corporation

©2012\ SYNC Power Corporation – Printed in Taiwan – All Rights Reserved

SYNC Power Corporation

7F-2, No.3-1, Park Street

NanKang District (NKSP), Taipei, Taiwan 115

Phone: 886-2-2655-8178

Fax: 886-2-2655-8468

©<http://www.syncpower.com>