




Bestückungsplan / contact layout

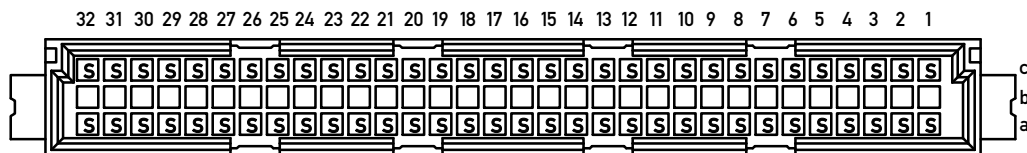

Leiterplatten-Lochbild / PCB drillhole pattern

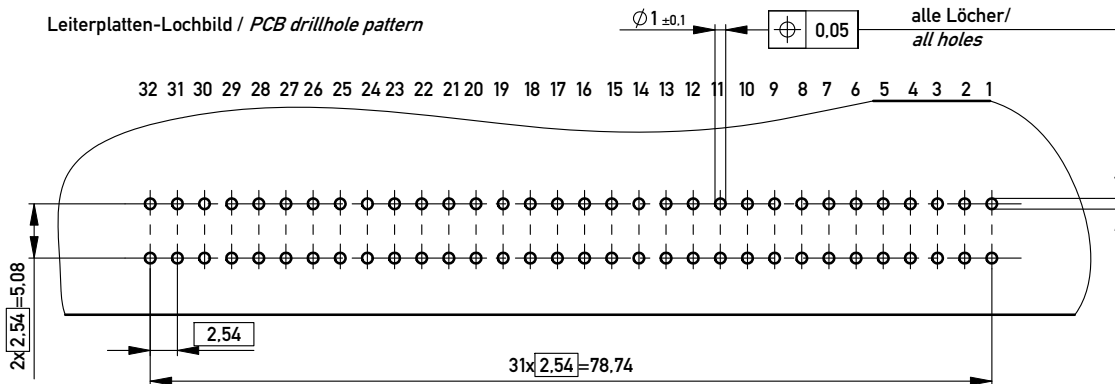

Stecklänge / mating length

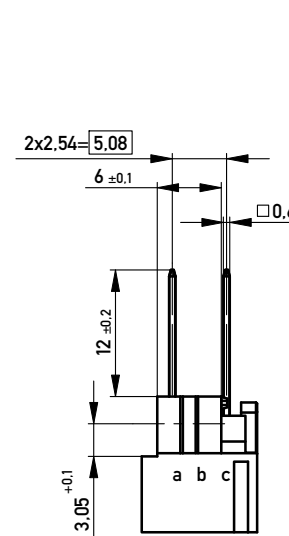

E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend

Isolierwerkstoff / housing material : PBT GF 30

Bauart 4 / type 4

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2= 400 mating cycles



Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Lötanschluss 0,6x0,6mm / solder terminal 0,6x0,6mm

Bedruckung siehe Zeichnung 294905

Marking see drawing 294905

Information:				Tolerances				Scale		2:1	
						All Dimensions in mm					
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation  <b>Messerleiste C 64 Löt</b> <i>Male Connector C64 solder</i>			
				-		22.06.2009				www.ERNI.com	
Index		Date						Class		STVC	
										A3	

Copyright by ERNI GmbH  
Property notice pursuant to ISO 10116 to be observed.