




CAMBION'S 703-85XX Series type single in-line sockets complement the standard low profile socket range with the advantage of allowing the user to choose pin centres according to his dual-in-line package requirements.

Advantages


- Body Material is glass fibre filled polyester, flame retardant to UL94V-O.
- The construction of the machined brass housing, which is available in a choice of finishes, gives a wicking free facility.
- The connector can be easily snapped to length, to suit varying requirements, or can be supplied in standard lengths (see table below).
- I.C. Leg's are retained by a gold or tin plated four leaf contact which assures positive connection on all faces.
- The design of the socket enables buttability on .100" (2.54mm) pitch.
- Available in 2 to 32 way.

HOW TO ORDER CODE

703 -85XX - 01- XX - 10

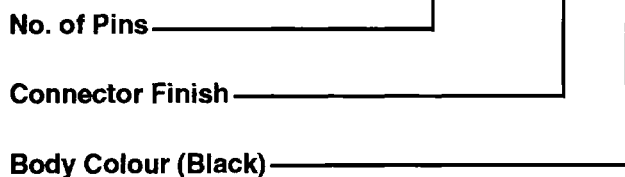

No. of Pins	DIM "A"	Order Code
2	.200 (5,08)	703-8502-01
3	.300 (7,62)	703-8503-01
4	.400 (10,16)	703-8504-01
5	.500 (12,70)	703-8505-01
6	.600 (15,24)	703-8506-01
7	.700 (17,78)	703-8507-01
8	.800 (20,32)	703-8508-01
9	.900 (22,86)	703-8509-01
10	1,000 (25,40)	703-8510-01
11	1,100 (27,94)	703-8511-01
12	1,200 (30,48)	703-8512-01
13	1,300 (33,02)	703-8513-01
14	1,400 (35,56)	703-8514-01
15	1,500 (38,10)	703-8515-01
16	1,600 (40,64)	703-8516-01
17	1,700 (43,18)	703-8517-01
18	1,800 (45,72)	703-8518-01
20	2,000 (50,80)	703-8520-01
22	2,200 (55,88)	703-8522-01
24	2,400 (60,96)	703-8524-01
25	2,500 (63,50)	703-8525-01
30	3,000 (76,20)	703-8530-01
32	3,200 (81,28)	703-8532-01

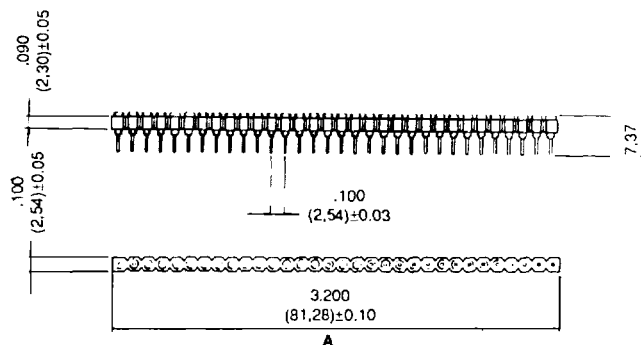

CONNECTOR FINISH		
Coded Dash No.s		
Dash No.	Housing Finish	Clip Finish
93	10µ" Gold (0,25µM)	10µ" Gold (0,25µM)
96	200µ" Tin (5µM)	10µ" Gold (0,25µM)
04	200µ" Tin (5µM)	200µ" Tin (5µM)