



Einbaustecker Power inlets


NEU
NEW

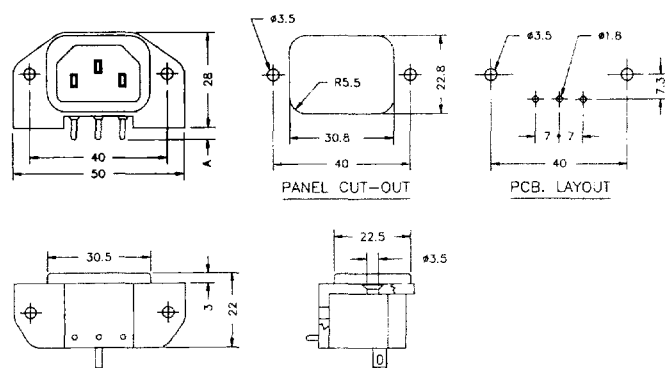


Art.-Nr. / Part no.: Anschluß / Terminal
A-KGS-F/A Ø 1.5 x 3.7

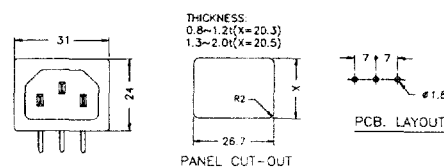

Art.-Nr. / Part no.: Anschluß / Terminal
A-KGS-S/A Ø 1.5 x 3.7

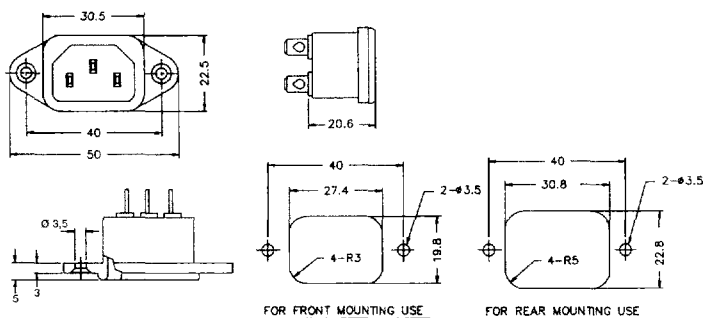

Art.-Nr. / Part no.: Anschluß / Terminal
A-KGS-F/T1 4.8 x 6.5 mm, Ø 2.8 x 3.3
A-KGS-F/T2 6.3 x 8.0 mm, Ø 1.7



Art.-Nr. / Part no.: Anschluß / Terminal
A-KGS-S/T1 4.8 x 6.5 mm, Ø 2.8 x 3.3
A-KGS-S/T2 6.3 x 8.0 mm, Ø 1.7

Befestigungsart: Flansch mit 2-Loch-Befestigung oder Snap-In
Nennspannung: 250 V AC
Nennstrom: 10 A
Isolationswiderstand: 100 MΩ
Temperaturbereich: -25°C bis +85°C

Werkstoffe

Kontaktstifte: Kupferlegierung, verzinkt
Gehäuse: P.B.T., 30 % GV
Normen: IEC 320 C13, IEC 320 C14
Prüfzeichen: VDE, SEMKO, DEMKO, NEMKO, SEV, CSA, UL

Style of fixation: Flange with 2-whole fixation or snap-in
Nominal voltage: 250 V AC
Nominal current: 10 A
Insulation resistance: 100 MΩ
Temperature range: -25°C to +85°C

Material

Terminals: Copper alloy, tin plated
Housing: P.B.T., 30 % glass fibre
Standards: IEC 320 C13, IEC 320 C14
Approvals: VDE, SEMKO, DEMKO, NEMKO, SEV, CSA, UL