

SPECIFICATIONS

Mechanical

Durability: 2500 Cycles

Electrical

Voltage Rating: 125V

Current Rating: 7.0A

Contact Resistance: 25mW max.

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 1000MW

Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color

Contact: Brass

Plating: See "ORDERING INFORMATION"

Board Lock: Phosphor Bronze

Operating Temperature: -40 to +105


Battery Connector

BP01 Series


Through Hole Type Plug

2.00mm [.079"] Pitch


8 Pos.



DRAWING

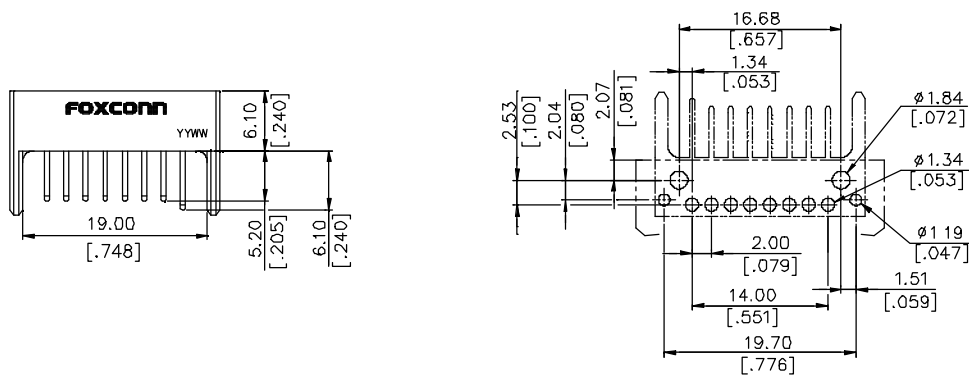

RECOMMENDED P.C.B. LAYOUT

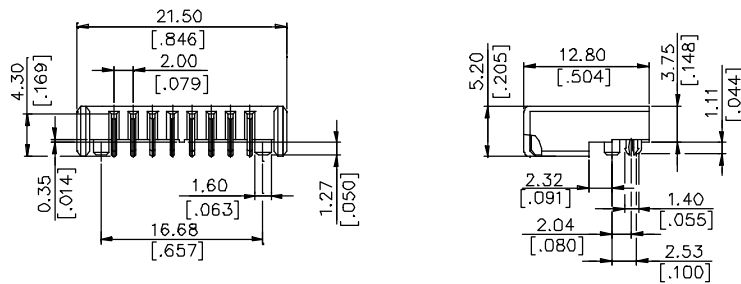

ORDERING INFORMATION

PRODUCT NO.: B P 01 08 7 - T2

