
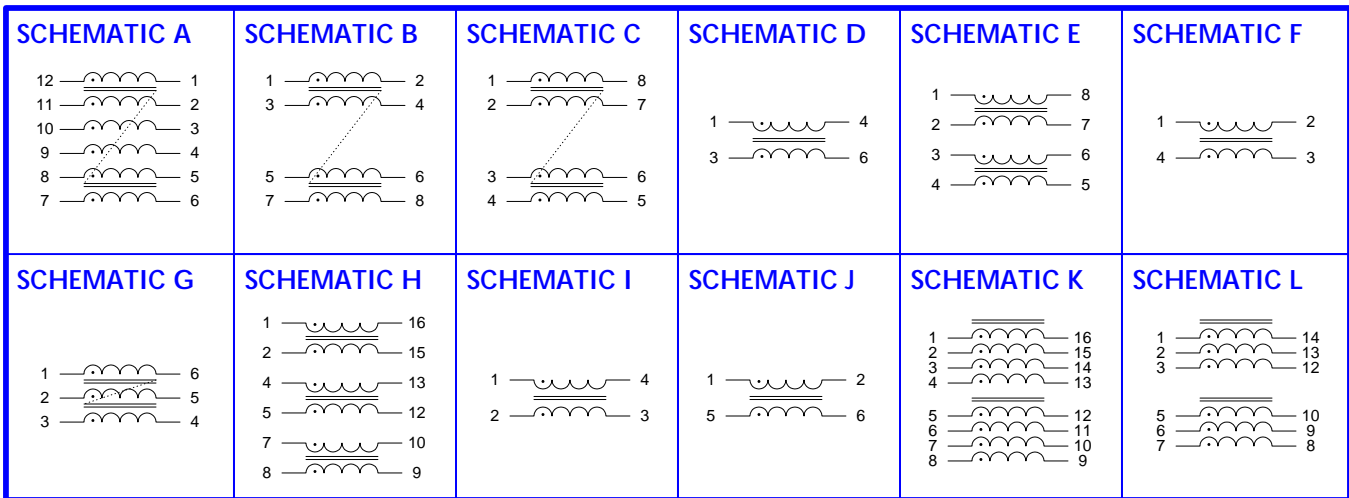


COMMON MODE CHOKES - THROUGH HOLE PACKAGES

LAN and Telecom

FEATURES

- Reduces EMI noise in the common mode providing better performance for FCC.
- Designed to meet IEEE 802.3 and IEEE 802.5.
- Frequency range from 100 KHz to 200 MHz.
- Surface mount packages available.
- Low cost.

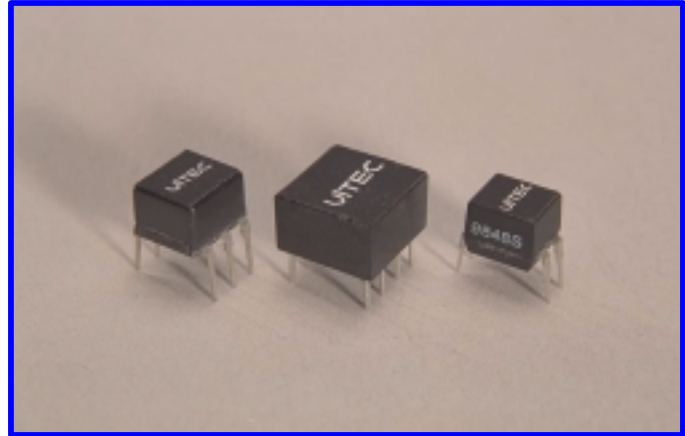

ELECTRICAL CHARACTERISTICS @ 25°C												
Part Number	OCL	Common Mode Attenuation					Crosstalk 0-25 MHz dB MAX	LL uH MAX	CC pF MAX	DCR Ohms MAX	Dielectric Strength Vrms MIN	Package/ Schematic
		100Khz dB TYP	10Mhz dB TYP	50Mhz dB TYP	100Mhz dB TYP	300Mhz dB TYP						
		MIN										
14Z3257	85	8	29	28	26	20	--	0.25	9.50	0.20	--	8/G
14Z3259	85	8	29	28	25	17	--	0.25	9.50	0.20	--	9/C
14Z3267	85	8	33	30	27	18	--	0.25	12.00	0.20	--	7/I
14Z3281	68	--	--	--	--	--	--	0.25	9.50	0.20	--	10/L
14Z3285	68	--	--	--	--	--	--	0.25	12.00	0.20	--	10/K
14Z4506	85	8	30	28	27	21	--	0.25	10.00	0.20	--	10/H
16Z5751	24	1	28	33	28	13	--	--	--	0.30	--	1/J
18Z4814	50	14	45	50	47	20	--	--	--	0.30	--	4/E
18Z4815	68	7	37	42	40	31	--	--	--	0.35	--	3/E
18Z4836	140	14	45	50	47	38	--	--	--	0.60	--	6/F
18Z4837	140	14	44	48	43	33	--	--	--	0.60	--	4/E
18Z4844	40	14	40	40	35	35	--	0.15	3.80	0.40	500	3/C
18Z4853	1000	28	42	22	--	--	--	--	--	0.70	--	2/B
18Z4854	4700+/-30%	40	37	23	20	--	--	--	--	1.00	--	2/B
18Z4855	6000	44	33	29	--	--	--	--	--	1.40	--	2/B
24Z4681	24	--	32	39	34	24	--	0.20	15.00	0.30	500	3/C
24Z4683	25	6	32	37	32	21	--	0.20	15.00	0.35	500	5/A
24Z4685	24	--	--	--	--	--	--	0.20	15.00	0.21	500	11/K
24Z4687	36	--	--	--	--	--	--	0.30	25.00	0.35	500	3/C

COMMON MODE CHOKES - THROUGH HOLE PACKAGES

LAN and Telecom

<p>PACKAGE 1</p>	<p>PACKAGE 2</p>	<p>PACKAGE 3</p>
<p>PACKAGE 4</p>	<p>PACKAGE 5</p>	<p>PACKAGE 6</p>
<p>PACKAGE 7</p>	<p>PACKAGE 8</p>	<p>PACKAGE 9</p>
<p>PACKAGE 10</p>	<p>PACKAGE 11</p>	<p>Notes:</p>