

## ATC 506WLC2R0KG250B Ultra-Broadband Inductor

### Features:


- Inductance: 2.0  $\mu$ H, typ.
- Operating Frequency: 2.3 MHz (-3 dB roll-off) through 40 GHz, typ.
- Insertion Loss (shunt mounted): 0.5 dB, typ.
- Return Loss (shunt mounted): 17 dB, typ.
- Rated Current: 250 mA dc, max.\*
- DC Resistance: 1.45  $\Omega$ , typ. @ 10 mA
- Operating Temperature Range: -40°C to +85°C
- Gold plated leads: 15 – 25  $\mu$  in.

ATC, the industry leader, is introducing the new 506WLC Series High Frequency **Ultra-Broadband Inductor (UBL)**. This unique component\*\* provides low insertion loss and an excellent match over multiple octaves of frequency spectrum.

The 506WLC is ideal for ultra-broadband DC decoupling networks and bias tee applications in optical communications systems and equipment using high-speed digital logic.

\* Current for 100 °C Temperature rise



\*\* patent pending

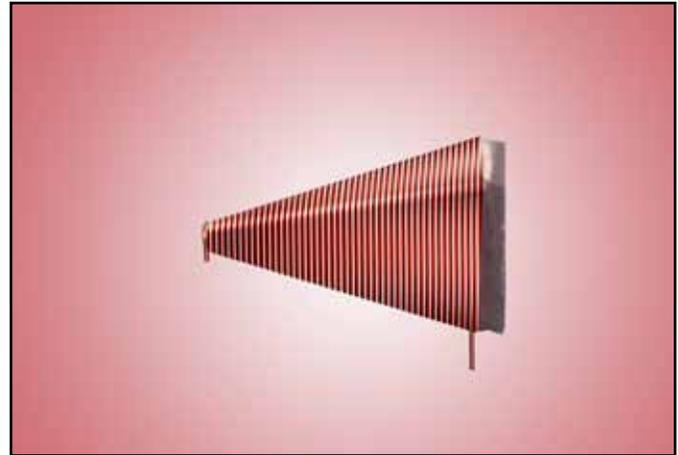

### New Design

### Advantages:

- Ultra-Broadband Performance
- Ultra-Low Insertion Loss
- Flat Frequency Response
- Excellent Return Loss Through 40 GHz
- Unit-to-Unit Performance Repeatability
- Rugged Powdered Iron Core

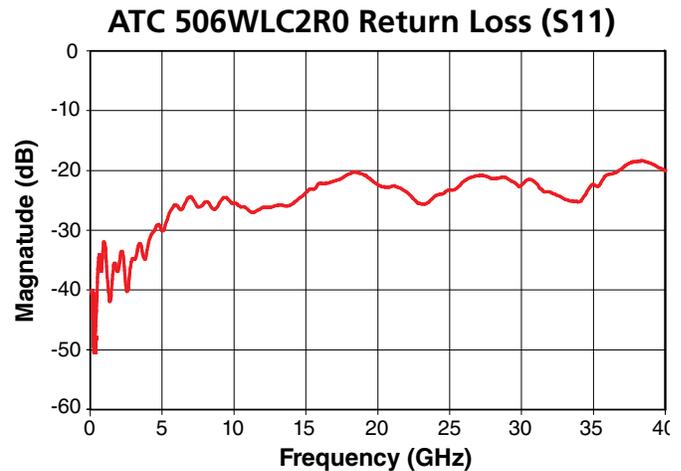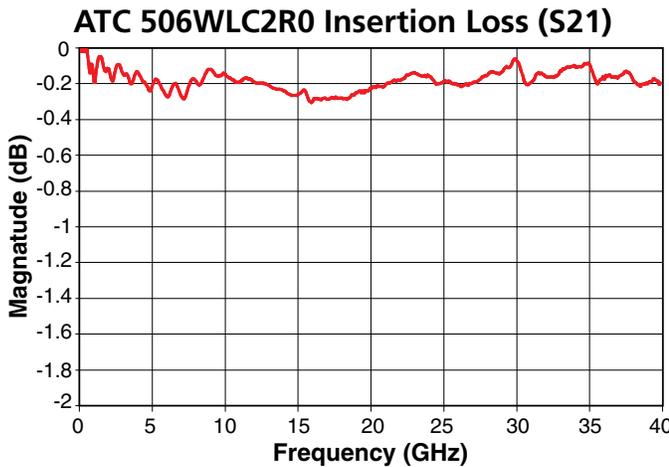

ATC 506WLC2R0KG250B Data Sheet Test Condition Description



AMERICAN

ATC North America  
sales@atceramics.com

TECHNICAL

ATC Europe  
saleseur@atceramics.com

CERAMICS

ATC Asia  
sales@atceramics-asia.com



ISO 9001 REGISTERED

[www.atceramics.com](http://www.atceramics.com)

# ATC 506WLC SERIES UBL INDUCTORS


## Electrical Specifications:

- Inductance: 2.0  $\mu$ H, typ.
- Rated Current: 250 ma, max.


- Operating Temperature: -40°C to + 85°C
- Resistance: 1.45  $\Omega$ , typ. at +20°C, 10 mA current.

Inductance ( $\mu$ H)	Tolerance Code	$R_{DC}$ ( $\Omega$ )	$I_{DC}$ (mA), max.	Number of Turns	Cu Wire Size (AWG)
2.0	K ( $\pm 10\%$ ), typ.	1.45	250	46	44

## Mechanical Dimensions

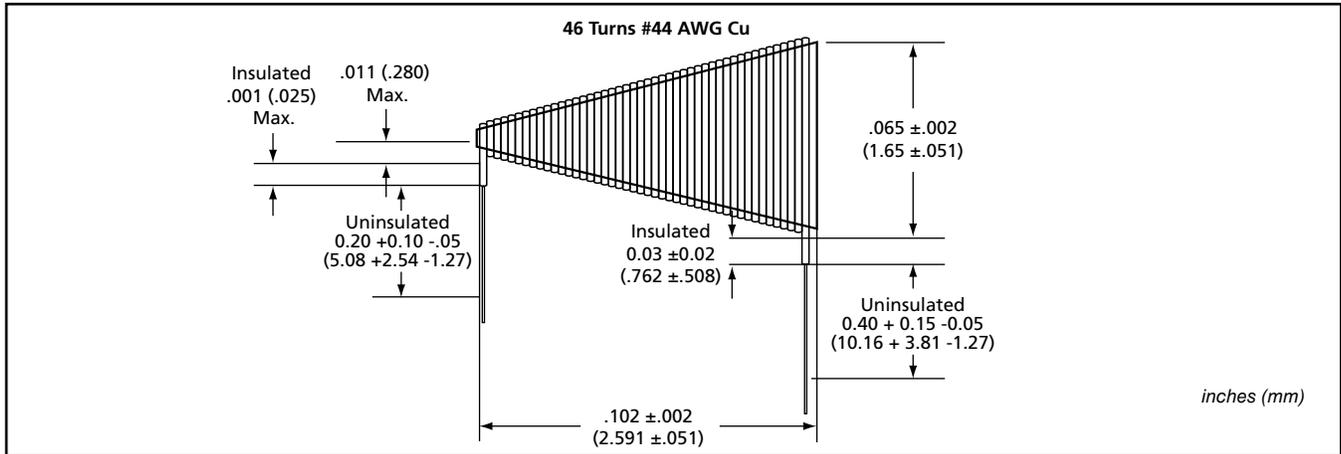

### ATC PART NUMBER CODE

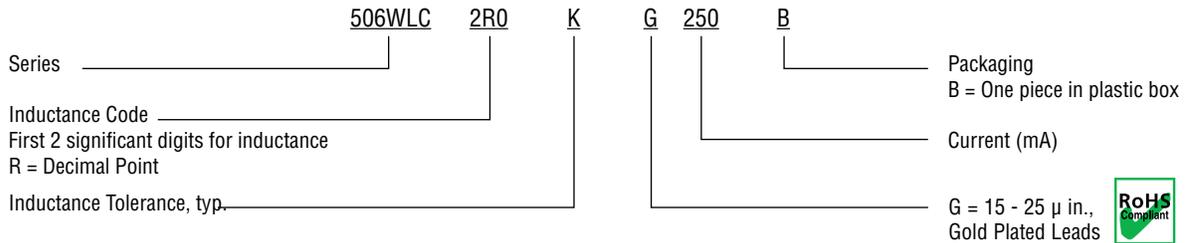

The above part number refers to a 506WLC Series 2.0  $\mu$ H inductor, K tolerance ( $\pm 10\%$ , typ.), with Gold Plated Leads (G), 250 mA, one piece in plastic box.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix.

Consult factory for additional performance data.

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. A 10/03). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at [www.atceramics.com/productfinder/default.asp](http://www.atceramics.com/productfinder/default.asp). Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product line without prior notice.

© 2010 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-1084 Rev. C; 9/12



AMERICAN

ATC North America  
sales@atceramics.com

TECHNICAL

ATC Europe  
sales@atceramics.com

CERAMICS

ATC Asia  
sales@atceramics-asia.com



ISO 9001 REGISTERED

[www.atceramics.com](http://www.atceramics.com)