



GSBC807

PNP EPITAXIAL PLANAR TRANSISTOR

Description

The GSBC807 is designed for switching and AF amplifier application, suitable for driver storages and low power output storages.

Package Dimensions

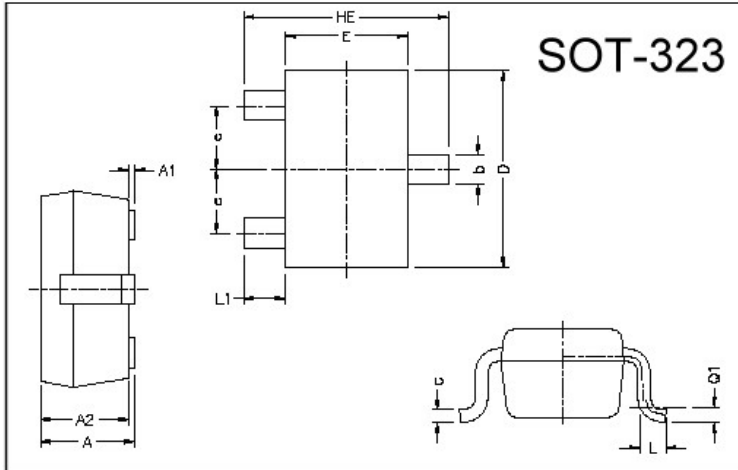

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	0.80	1.10	L1	0.42 REF.	
A1	0	0.10	L	0.15	0.35
A2	0.80	1.00	b	0.25	0.40
D	1.80	2.20	c	0.10	0.25
E	1.15	1.35	e	0.65 REF.	
HE	1.80	2.40	Q1	0.15 BSC.	

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Ratings	Unit
Junction Temperature	T _j	+150	°C
Storage Temperature	T _{stg}	-55 ~ +150	°C
Collector to Base Voltage	VCBO	-50	V
Collector to Emitter Voltage	VCEO	-45	V
Emitter to Base Voltage	VEBO	-5	V
Collector Current	I _C	800	mA
Total Power Dissipation	PD	225	mW

Characteristics at Ta = 25°C







Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BVCBO	-50	-	-	V	I _C =-100uA
BVCEO	-45	-	-	V	I _C =-10mA
BVCES	-50	-	-	V	I _C =-100uA
BVEBO	-5	-	-	V	I _E =-100uA
ICES	-	-	-100	nA	V _{CE} =-25V
IEBO	-	-	-100	nA	V _{EB} =-4V
*V _{CE} (sat)	-	-	-700	mV	I _C =-500mA, I _B =-50mA
*V _{BE} (on)	-	-	-1.2	V	V _{CE} =-1V, I _C =-300mA
*h _{FE}	100	-	630		V _{CE} =-1V, I _C =-100mA
f _T	-	100	-	MHz	V _{CE} =-5V, I _C =-10mA, f=100MHz
C _{ob}	-	-	12	pF	V _{CB} =-10V, f=1MHz, I _E =0A

* Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2%

Classification Of hFE

Rank	9FA	9FB	9FC
Range	100 - 250	160 - 400	250 - 630

Characteristics Curve

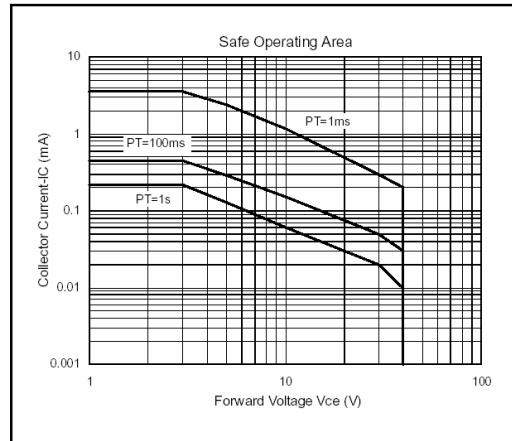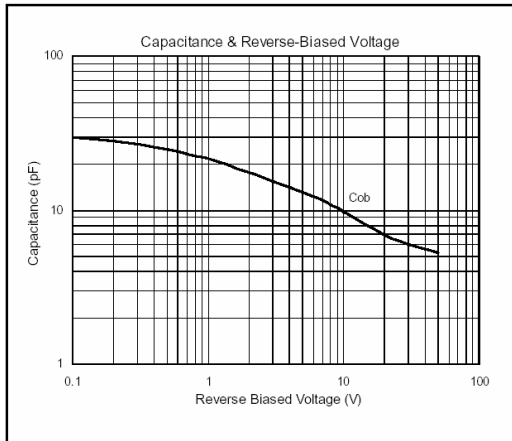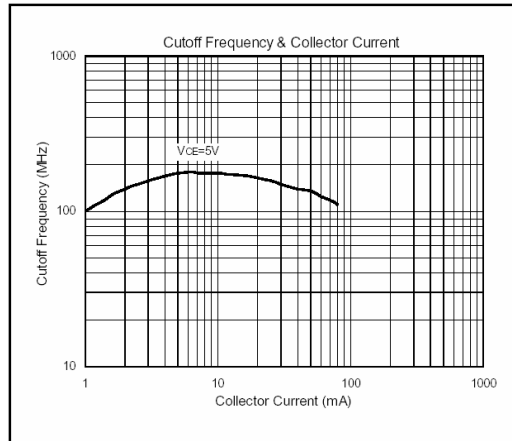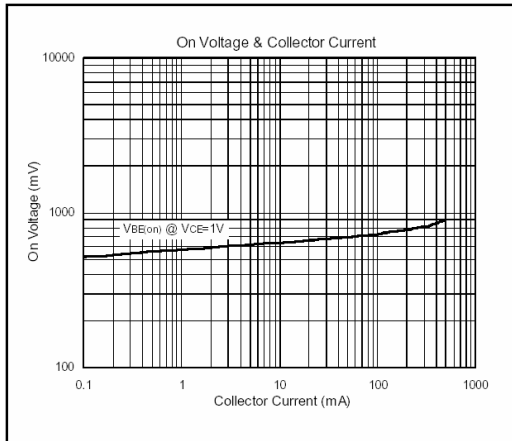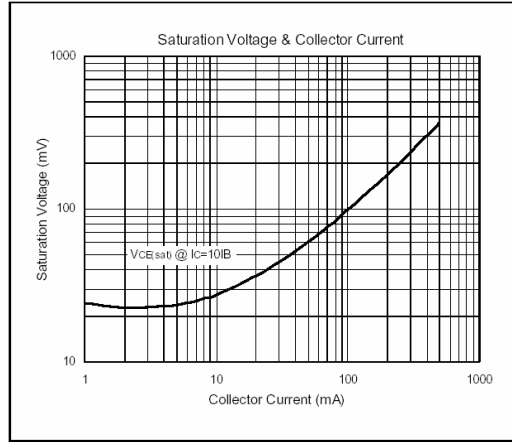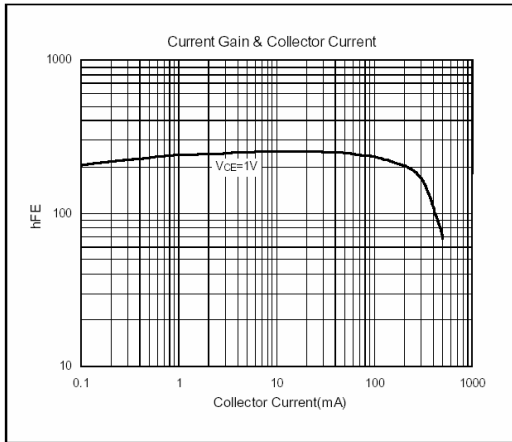

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
- TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
- TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165